AVIATION WEEK

A McGRAW-HILL PUBLICATION

FEB 9 1953

50 CENTS

NEWEST MEMBER OF THE "D C" FAMILY

Here's a ship you'll be hearing plenty more about when she begins to go into service on U.S. airlines later this year.

She's the DC-7, newest and fastest (360 mph cruising, over 400 mph top speed) of the Douglas commercial family.

The DC-7 will seat from 60 to 95 passengers, will be capable of flying nearly 5,000 miles non-stop, and will provide a more luxurious, comfortable ride.

Models of the big ship now being built for four major domestic airlines* will be equipped with Honeywell *electronic* fuel measurement systems. These airlines specified the Honeywell system because of its great *dependability* and reputation for *accuracy*—direct results of Honeywell's high engineering, research, and material standards.

The same system has been specified by Pan American World Airways for their latest DC-6B's. Military versions of these electronic fuel measurement systems are now standard equipment on more than 40 types of service aircraft.

Electronic fuel measurement systems represent only one of the many types of Honeywell products now in use by the aviation industry. We expect the list to grow longer in future years—because *automatic controls* are so important to aviation progress. And Honeywell has been the leader in controls for more than 60 years.

*American Airlines, Delta Air Lines, National Airlines, United Air Lines.

MINNEAPOLIS
Honeywell

H HONEYWELL *Aeronautical Controls*

HYDRO-AIRE RESEARCH

now

turbodrive

units

Whether Check Valves or complete accessory Turbodrive Units, *there are no projects too small—few projects too large* for Hydro-Aire's Engineering, Research and Production experience.

ENGINEERS! Investigate the promising career opportunities now open at Hydro-Aire. Design Engineers are urgently needed to work on fuel pumps, turbodrives, hot air valves and other aircraft accessory units. For more information, phone, wire or write Personnel Department.

HYDRO-AIRE *Inc.*

Subsidiary of Crane Co.

3000 Winona Avenue · Burbank, California

A 38% increase in tire life is but one of the many proved advantages of Hydro-Aire's Hytrol Anti-skid Braking System.

B.F.Goodrich

Sealed lips hold the secret of faster maintenance

LOCKHEED ENGINEERS were looking for a way to seal the gap between elevator and stabilizer on the P2V-5 "Neptune" for smoother operation of controls. A flap seal—long strip of coated fabric—would do the trick. But an ordinary flap seal poses a maintenance problem. Every time an elevator is taken off for service, the flap seal must be removed too. And with ordinary flap seals, that's a long, costly job.

So Lockheed engineers came to B. F. Goodrich with the problem. And B. F. Goodrich had the answer—the Pressure Sealing Zipper.

The zipper's overlapping rubber lips provide a 100% effective seal against pressure. As a result, the elevator controls are easier to operate. When an elevator is removed, mechanics simply unzip the seal instead of laboriously taking out one screw after another. If a new elevator is installed, old and new halves of the zipper mesh perfectly, since all halves of the zipper are interchangeable. And the zipper makes it easier to get a tight-fitting seal around the hump shown over the man's arm in the photo.

B. F. Goodrich Pressure Sealing Zippers can be cemented onto either fabric or metal. They save space and weight. Fit snugly around complex shapes. Are used on airplane doors, air ducts, inverter covers, watertight protective coverings. For information on construction and applications of Pressure Sealing Zippers, write for our new booklet, "Hold Everything." *The B. F. Goodrich Company, Aeronautical Division, Akron, Ohio.*

B.F.Goodrich
FIRST IN RUBBER

EMERGENCY
INTERCOM SERVICE
INDEPENDENT OF
POWER SERVICE

Quickly...
easily...
install

WHEELER
SOUND POWERED
Electric
TELEPHONES

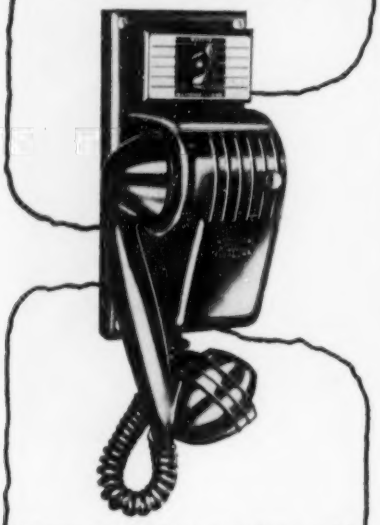

Power or telephone failure could shut down your intercommunications when MOST needed. But not if you have a Wheeler System, which is INDEPENDENT of outside power, yet requires NO BATTERIES and is ALWAYS ready for use. Easily installed...safe...not subject to deterioration. Handsets, Pair Phones, complete intercom systems. Write us for details.

the WHEELER
INSULATED WIRE CO., Inc.
DIVISION OF THE SPERRY CORP
1124 EAST AURORA STREET
WATERBURY, CONNECTICUT
86WH52C

Aviation Week

ABP Member ABC

Volume 58 February 9, 1953 Number 6

Headline News

F3Ds Outfly Red Night Fighters..... 13
Comet Certification Problem..... 15
Review of Aviation Policies Begins... 16
Britain Announces New Jet Liner.... 16
Plane Fastener Fight Nears End..... 17
BuAer Speeds Contracting..... 18
SEC Report 21

Facts for Filing

Air Force Organization..... 23

Aeronautical Engineering

Littlewood Looks at Transports..... 24
IAS Summaries 58

Avionics

Big Brain to Solve USAF Problems... 61

Equipment

Expandable Hangar Has Clear Floor.. 69

Air Transport

Fight On for Big 4 Monopoly Routes.. 75
Enforcement on UAL Coach Begins.. 77
CAA Seeks $45-Million Aid Fund.... 78
Heacock Resigns as ACTA Head.... 80

Departments

News Digest 8
Aviation Calendar 8
Picture Page 9
Who's Where 11
Industry Observer 11
Washington Roundup 12
Navy Contracts 59
Filter Center 67
New Aviation Products..... 70
Also on the Market..... 72
Shortlines 88
Letters 90

44,720 copies of this issue printed

Robert H. Wood
EDITOR

Merlin H. Mickel
MANAGING EDITOR

Albert W. Bentz ..... NEWS EDITOR
Alexander McSurely ..... Aviation Safety
David A. Anderton ..... Engineering
Irving Stone ..... Technical
G. L. Christian III ..... Equipment & Maintenance
Katherine Johnsen ..... Congress
Lee Moore ..... Transport
Philip Klass ..... Avionics

Robert B. Hotz
EXECUTIVE EDITOR

Scott Reiniger ..... New Produc
Erwin J. Bulban ..... Special Assignment
Richard Balentine ..... Federal Agencies
Henry Lefer ..... News Desk
Gordon C. Conley ..... News Desk
Victoria Giaculli ..... Editorial Makeup
Leo T. Tarpey ..... Printing & Production
Helen Rich ..... Editorial Research

Editorial Office: 330 West 42nd St., New York 16, N. Y. Phone Longacre 4-3000, or (night) 4-3035; National Press Bldg., Washington 4, D. C., Phone National 3414.

Domestic News Bureaus: Atlanta 3, 1321 Rhodes-Haverty Bldg.; Chicago 11, 520 N. Michigan Ave.; Cleveland 15, Hanna Bldg.; Detroit 26, Penobscot Bldg.; Los Angeles 17, 1111 Wilshire Blvd.; San Francisco 4, 68 Post St.; Houston 25, 1303 Prudential Bldg. *Correspondents* in more than 60 major cities.
Foreign News Bureaus: London, Paris, Frankfurt, Tokyo, Manila, Rio de Janeiro, Mexico City. *Correspondents* in more than 59 major cities.
Aviation Week is served by PRESS ASSOCIATION, INC., a subsidiary of Associated Press.

Robert W. Martin, Jr.
PUBLISHER

J. G. Johnson, *Business Manager*; Catherine Miner, *Research and Marketing*; Sales Representatives; J. C. Anthony, *New York*; H. P. Johnson, *Cleveland*; L. J. Biel, *Chicago*; W. E. Donnell, *St. Louis*; E. P. Blanchard, Jr., *Boston*; James Cash, *Dallas*; R. C. Maultsby, *Atlanta*; R. F. Dorland, Jr., *San Francisco*; C. F. McReynolds, *Los Angeles*; W. S. Hessey, *Philadelphia*. Other sales offices in *Pittsburgh, Detroit, London*.

February 9, 1953 AVIATION WEEK Vol. 58—No. 6
Member ABC and ABP

Published weekly by McGraw-Hill Publishing Company, Inc., James H. McGraw (1860-1948), Founder. **Publication Office: 99-129 North Broadway, Albany 1, N. Y.**
Executive, Editorial and Advertising Offices: McGraw-Hill Building, 330 W. 42nd St., New York 36, N. Y. Curtis W. McGraw, President; Willard Chevalier, Executive Vice-President; Joseph A. Gerardi, Vice-President and Treasurer; John J. Cooke, Secretary; Paul Montgomery, Senior Vice-President, Publications Division; Ralph B. Smith, Vice-President and Editorial Director; Nelson Bond, Vice-President and Director of Advertising; J. E. Blackburn, Jr., Vice-President and Director of Circulation.
Subscriptions: Address correspondence to AVIATION WEEK—Subscription Service, 99-129 North Broadway, Albany 1, N. Y., or 330 W. 42nd St., New York 36, N. Y. Allow ten days for change of address.
Subscriptions are solicited only from persons having a commercial or professional interest in aviation. Position and company connection must be indicated on subscription orders.
Single copies 50¢. Subscription rates—United States and possessions, $6 a year; $9 for two years; $12 for three years. Canada, $8 a year; $12 for two years; $16 for three years, payable in Canadian currency at par; other Western Hemisphere, $10 a year; $16 for two years; $20 for three years. All other countries $20 a year; $30 for two years; $40 for three years. Entered as second-class matter, July 16, 1947, at the Post Office at Albany, N. Y., under Act of Mar. 3, 1879. Printed in U. S. A. Copyright 1953 by McGraw-Hill Publishing Co., Inc.—All Rights Reserved. Cable Address: "McGraw-Hill New York." Publications combined with AVIATION WEEK are AVIATION, AVIATION NEWS, AIR TRANSPORT, AERONAUTICAL ENGINEERING and AIRCRAFT JOURNAL. All rights to these names are reserved by McGraw-Hill Publishing Co.

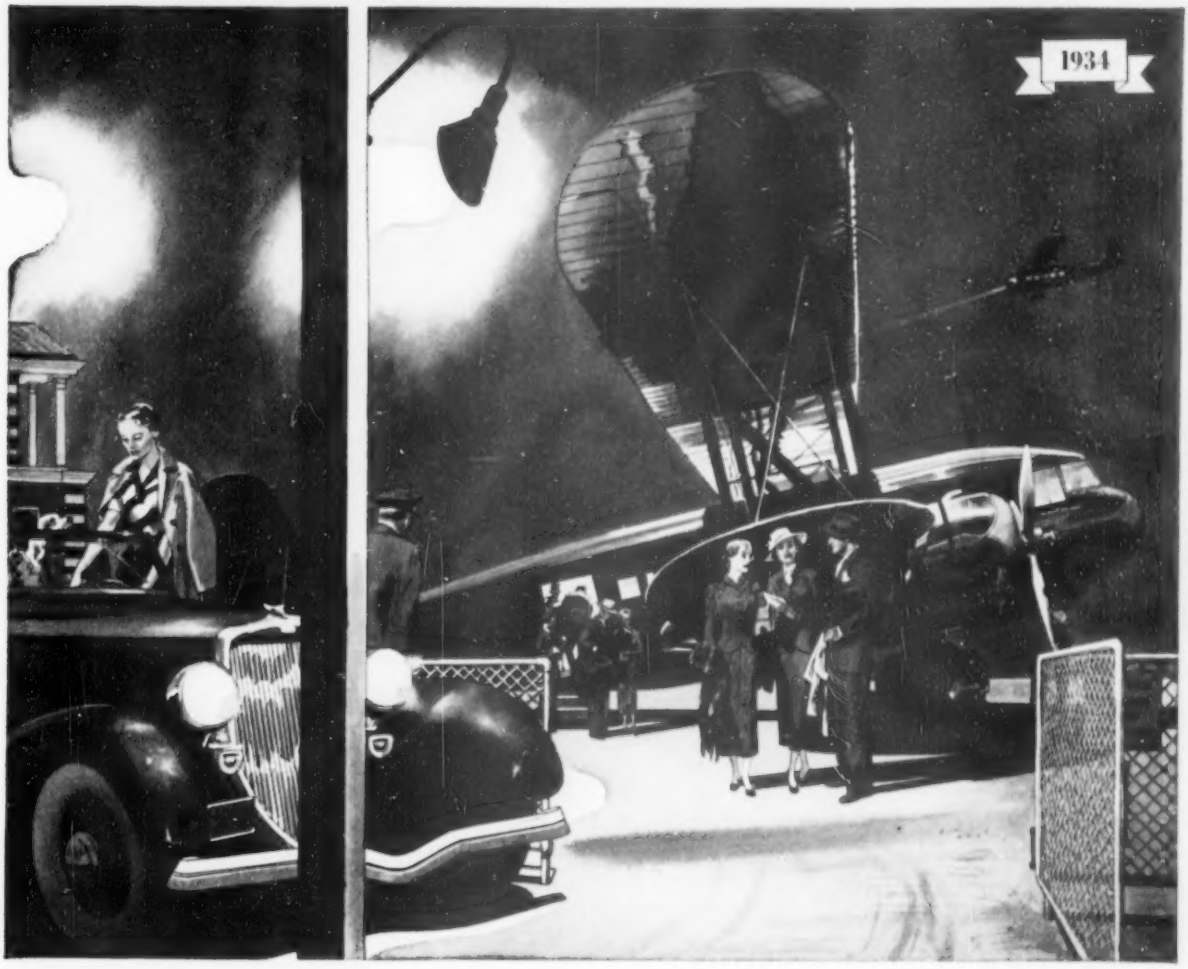

The Sleeper Plane that "WOKE" the traveling public

American Airlines pioneered in the development of the sleeper plane for coast-to-coast service, introducing it in May 1934.

Sleeper service proved to be particularly important to the growing airline industry at that time. For it literally "woke" the public to the fact that air travel, with its tremendous time-saving advantage, could also match every standard of comfort and luxury offered by surface transportation.

Many transportation officials were frankly dubious about the potentialities of sleeper planes, but mounting popularity and public demand soon wiped away all doubts. Other airlines, taking their cue from American's success, began to install berths in some of their own long-haul aircraft.

The inauguration of sleeper plane service is only one of many milestones in the history of air transportation that have been introduced by American Airlines.

AMERICAN AIRLINES INC.
America's Leading Airline

NO. 1 IN A SERIES OF ADS SHOWING THE PROGRESS OF AIR TRANSPORTATION

The thousand-mile handshake

When a company-owned Beechcraft Executive Transport is available for instant action, you and your key men find time to shake hands with field men, customers, new business prospects *regularly*. For example, you can leave at *your* convenience, cruise in relaxing comfort one thousand miles in less than five hours, tend to business, return that day. Home office work *can't* pile up.

Thousands of executives use this soundproofed Beech "Twin" in just such fashion daily. In *your* business, you could use more *time*. Investigate! Typical costs and operating data on request.

☆ ☆ ☆

Call your Beechcraft distributor or write Beech Aircraft Corporation, Wichita, Kansas, U.S.A.

BEECHCRAFTS ARE THE AIR FLEET OF AMERICAN BUSINESS

NEWS DIGEST

Domestic

Gen. O. P. Weyland, U. S. Far East Air Force commander, says Russia and Communist China have a combined force of at least 7,000 combat planes in the Orient—"greatly outnumbering" American aircraft. The Soviet Union's known force of 4,500 planes includes medium bombers capable of striking at any city in Japan, Weyland says.

Love Field, largest commercial airport in Dallas, will be expanded and improved through a $12.5-million tax bond issue approved during a city election. The Dallas development program also includes conversion of small Red Bird Airport into an industrial airfield.

Reynolds Metals will build a $7.5-million addition to its McCook, Ill., plant for production of aluminum tapered sheet and plate used in the manufacture of Navy aircraft.

Flight Safety Foundation, Inc., New York, has formed a new Division of Aircraft Service and Equipment to coordinate activities with industry ground-safety departments. The division is headed by Joseph M. Chase, former aviation manager of Lumbermen's Mutual Casualty Co.

Manufacturers Aircraft Assn. has re-elected William E. Valk of Curtiss-Wright Corp. as organization president. Vice presidents for this year: Robert E. Gross, Lockheed Aircraft Corp.; J. H. Kindelberger, North American Aviation, Inc.; W. T. Piper, Piper Aircraft Corp.; Charles H. Chatfield, United Aircraft Corp.; Horace G. Hitchcock of Chadbourne, Parke, Whiteside, Wolff & Brophy, New York, and John A. Sanborn, MAA general manager. Re-elected: James P. Murray, Boeing Airplane Co., secretary, and Charles Kingsley, Grumman Aircraft Engineering Corp., treasurer.

Society of Automotive Engineers has named Robert Cass, White Motor Co., Cleveland, as 1953 president. Vice presidents include: Air Transport—O. E. Kirchner, American Airlines; Aircraft—T. T. Neill, National Advisory Committee for Aeronautics; Aircraft Powerplant—E. G. Haven, General Electric Co.; Engineering Materials—G. C. Riegel, Caterpillar Tractor Co.; Fuels and Lubricants—F. A. Suess, Continental Oil Co.; Production—P. Petersen, Canadian Acme Screw & Gear, Ltd., and Transportation and Maintenance—O. A. Brouer, Swift & Co.

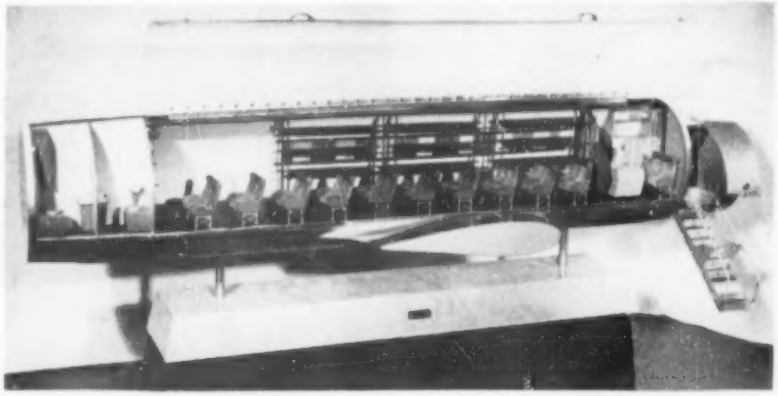

INTERIOR DETAILS of new Convair C-131A Samaritan transport (military CV-240) are highlighted in this cutway model of craft's interior. Note the rearward-facing seating arrangement and provision for litters against the opposite wall. A large door on the left side of the fuselage facilitates litter loading, and there is a collapsible stairway on the right side for ambulatory passengers. Deliveries will begin in 1954.

Bell Aircraft Corp. says 6,631 test flights were made by its Helicopter Division last year without damage to aircraft or injury to personnel.

Bendix Aviation will handle sales and field service of distance measuring equipment (DME) developed and manufactured by Hazeltine Electronics Corp., Little Neck, N. Y.

Ryan Aeronautical Co., San Diego, reports a new two-stage parachute recovery system has been used successfully in landing jet-propelled Ryan Q-2 pilotless target planes during tests at Holloman Air Development Center, Alamogordo, N. M.

Atomic Energy Commission has postponed to Feb. 17 opening of bids on construction of ground testing facilities for prototype aircraft propulsion reactor at the National Reactor Testing Station, Idaho Falls, Idaho.

Trans World Airlines began through service this month to the island dominion of Ceylon on through flights via Great Britain, Europe, the Middle East and Bombay.

Aircraft Consulting Service, Washington, D. C., will go out of business effective Feb. 15, director H. E. Weihmiller has announced.

Financial

Continental Motors Corp., Detroit, reports record sales of $264,219,009 during fiscal 1952, the corporation's 50th year of operation. Net earnings totaled $6,126,021 after taxes, boosting Continental's net working capital to $29,382,330.

International Air Transport Assn. interline transactions of $17,234,000 in November were 16% higher than 1951. Total 11-month volume last year was $200,725,000, a 31% increase over the same period in the preceding year.

Convair reports a net income of $10,426,476 for fiscal 1952 after taxes, compared with $7,750,524 in 1951. Net sales last year totaled $390,997,843, topping the 1951 total of $322 million.

Flying Tiger Line's airfreight traffic in 1952 produced revenues estimated at $7 million, compared with $4,570,000 in the preceding year.

Bendix Aviation Corp. reports post-war peak sales of $507.7 million in fiscal 1952, producing a reported net income of $15,295,159. This compares with sales of $340.5 million and net income of $11,818 for 1951.

International

British transport plane with 39 persons aboard crashed last week in the North Atlantic, 359 mi. east-southeast of Gander, Newfoundland. The plane was a four-engine York, operated by Skyways, Ltd., London.

British Commonwealth Pacific Airlines has purchased three de Havilland Comet 2 jet airliners for trans-Pacific service between Australia, New Zealand and North America.

Cameras on Reconnaissance Planes Airborne Actuated

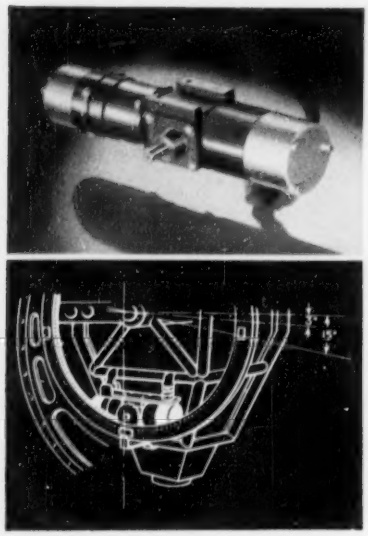

The R-118M6 Rotorac® is used on the Grumman F9F-5P and the Chance Vought F7U-3P to position the photo reconnaissance cameras.

The Airborne actuator is mounted on the camera cradle and its pinion engages a stationary internal gear segment. Five camera positions are obtainable: 3° or 5° and 15° below horizontal on each side, and vertical. The two extremes are controlled by the actuator limit switches; the others by limit switches on the gear segment. Internal switches in the actuator sequence the limit switches to permit the desired relocation.

The R-118M6 is a modification of the Rotorac shown in the I. A. S. Aeronautical Engineering Catalog. We suggest you refer to this publication for data on this and other Airborne actuators.

AIRBORNE

ACCESSORIES CORPORATION

1414 Chestnut Avenue, Hillside 5, N.J.

AVIATION CALENDAR

Feb. 10—Second seminar on industrial lubrication engineering, American Society of Lubrication Engineers, Bellevue-Stratford Hotel, Philadelphia.

Feb. 12-13—National Aviation Education Council annual meeting, Atlantic City, N. J.

Feb. 18—New York Section of the Instrument Society of America, Hotel Statler, New York, N. Y.

Feb. 18-19—Eighth Annual Conference of the Society of Plastics Industry, Reinforced Plastics Division, Shoreham Hotel, Washington, D. C.

Feb. 22-24—Texas' Second Agricultural Aviation Conference, Texas A & M College, College Station, Tex.

Feb. 28-Mar. 1—Seventh annual Pacific Coast Mid-Winter Soaring Meet, Torrey Pines Glider Port, San Diego, Calif.

Mar. 10-11—Eleventh Annual Conference, Society of the Plastics Industry Canada, Inc., General Brock Hotel, Niagara Falls, Canada.

Mar. 17-20—21st Annual Meeting American Society of Tool Engineers, Hotel Statler, Detroit.

Mar. 23-25—Third Midwestern Conference on Fluid Mechanics, University of Minnesota, Minneapolis.

Mar. 23-26—Institute of Radio Engineers National Convention, Waldorf-Astoria and Grand Central Palace, New York, N. Y.

Mar. 23-27—Eighth Western Metal Exposition and Congress, Pan-Pacific Auditorium, Los Angeles.

Mar. 23-28—Congress of Civil Aviation Conference, a joint meeting of trade organizations; theme: 50 years of aviation progress. American Association of Airport Executives is holding annual meeting simultaneously, Kansas City, Mo. Contact convention manager, Ross C. Roach, P. O. Box 315, Kansas City 41, Mo.

Mar. 25-27—National Production Forum of the SAE, Hotel Statler, Cleveland, O.

Mar. 31-Apr. 2—First International Magnesium Exposition, National Guard Armory, Washington, D. C.

Apr. 4-12—Second Annual International Motor Sports Show, Grand Central Palace, New York, N. Y.

Apr. 20-23—Aeronautic Production Forum, National Aeronautic Meeting and Aircraft Engineering display (SAE), Hotel Governor Clinton and Hotel Statler, New York, N. Y.

Apr. 20-May 2—Annual Conference of Technical Committee, International Air Transport Assn., Caribe Hilton Hotel, San Juan, Puerto Rico. Helicopter Symposium will be a principal feature.

Apr. 29-May 1—1953 Electronics Components Symposium (AIEE-IRE), Shakespeare Club, Pasadena, Calif.

PICTURE CREDITS

7—Convair; 13—(top) Douglas Aircraft; 14—McGraw-Hill World News; 15—CAA; 17—Kaiser-Frazer; 18—Bell Aircraft; 21—Wide World; 24—American Airlines; 69—Thompson Starrett Co.; 75—CAB; 76—Lockheed.

2nd International

AVIATION TRADE SHOW

June 9, 10, 11, 1953

Hotel Statler
New York, N. Y.

A NEW MARKET PLACE FOR THE AVIATION INDUSTRY

The most comprehensive display of aviation materials ever to be shown in the United States

The 2nd International Aviation Trade Show offers the aviation industry the opportunity to:

- **Show its products**
- **Introduce new devices and methods**
- **Expand present markets**
- **Develop new customers**
- **Bring key executives to you**

Special assistance for foreign visitors

Reservations now being accepted

For details write:

Aircraft Trade Shows, Inc.
Hotel McAlpin
New York 1, New York

Telephone: PE 6-5933
Cable Address: AIRSHOWS

PRODUCTION F2H-3—Initial photos of production McDonnell F2H-3 Banshee in new "silver" finish (left and below) show the craft's numerous external changes over earlier models, notably the new nose and tail. The planes are coming off the line in conventional dark blue Navy warpaint also; this craft is one of a group that will test durability of the light anodized finish aboard carriers. The new tail has horizontal surfaces set considerably lower and to the rear of position occupied on earlier models and they have noticeable dihedral. The F2H-3 is powered by two Westinghouse J34 axial-flow turbojets, one in each wingroot.

New Planes In the Air

UNDER THE BANSHEE—A striking view (right), of the F2H-3 detailing its ordnance fittings. Note the large nose radome. Among the F2H-3's new features are improved electronics equipment (compared with previous Banshees), more powerful armament and increased internal fuel capacity. The fuselage bulges around the cockpit just behind the gun ports.

1953 BONANZA DISPLAYED—Here is the latest Beech D35 Bonanza four-place business plane, 25 of which were scheduled to leave Wichita, Kans., Jan. 31. Company has firm orders for approximately 60 more D35s, which list at $18,990 (FAF). Plane has 2,725-lb. gross weight compared with last year's 2,700 lb., upping useful loads 22 lb. to 1,075 lb. Some 3,400 Bonanzas have been built.

MAXIMUM PROTECTION—MINIMUM COST...

HERE'S WHY...

***METAL Caps and Plugs Assure Maximum Protection** because they won't chip . . . no particles to clog lines.

METAL Caps and Plugs Assure Maximum Protection because they resist hard knocks, seal out dust and moisture, or seal in fluid when required.

METAL Caps and Plugs Assure Minimum Cost because they can be reused many times . . . they "spin" on by hand, and keep Hydraulic Systems clean . . . clean, *clean*.

CATALOG
free when requested
on your firm letterhead.

For Protection During Manufacture, Shipment and Storage of Hydraulic Lines and Fittings, Demand . . .

THE ORIGINAL METAL CLOSURES by TUBING SEAL CAP INC.

Home Office and Factory: 808 W. Santa Anita Ave., San Gabriel, California.
Eastern Office: 428 New Center Bldg., Detroit 2, Michigan.

WHO'S WHERE

In the Front Office

E. Allan Williford has been elected president of Link Aviation, Inc., Binghamton, N. Y. He succeeds **Edwin A. Link**, company founder who will continue as chairman of the board and director of research.

J. E. Ashman has been named president and a director of Air Associates, Inc., Teterboro, N. J. Ashman formerly was executive vice president of Rockwell Manufacturing Co.

Julian K. Sprague has been elected president of Sprague Electric Co., North Adams, Mass., succeeding his brother, **Robert C. Sprague**, slated to be new Air Force Undersecretary.

G. Robert Henry has been appointed executive vice president of Bonanza Air Lines.

D. Morris Pratt has been elected a vice president of Marbon Corp., a subsidiary of Borg-Warner Corp. **Ray P. Johnson**, a director of Borg-Warner and vice president of Borg-Warner International, has been appointed director sales research. The corporation also named **Alonzo B. Knight** as administrative assistant to the president.

Changes

Sidney W. Souers has been elected to the board of directors of McDonnell Aircraft Corp., St. Louis. A former director of the U. S. Central Intelligence Agency, Souers served until last month as a special consultant on military and foreign affairs to former President Truman and was executive secretary of the National Security Council from 1947-50.

William N. Porter, president of Chemical Construction Corp., has been elected a director of Ultrasonic Corp., Cambridge, Mass., electronics manufacturer.

George P. MacNichol III has been named operating supervisor of Electrapane (new aircraft glass) production at Libbey-Owens-Ford Glass Co., Toledo.

Matthew T. Lebenbaum is supervisor of a newly formed applied electronics section of Airborne Instruments Laboratory's Research and Engineering Division, Mineola, N. Y.

Leon Shloss has been named assistant director of public relations for Republic Aviation Corp., succeeding **Louis W. Davis**, who has resigned, according to a company announcement.

Ed A. Leden is the new administrative engineer for Aeronca Manufacturing Corp., Middletown, Ohio.

Franklin G. Pater has been appointed staff representative for the Aeronautical Industries section of the National Safety Council, succeeding **Howard H. Warzyn** of NSC's Air Transport section.

James Hodge, British jet engine expert, is conducting special graduate courses in gas turbines at Columbia University's School of Engineering, New York. He is on leave from Power Jet, Ltd.

Edward H. Hughes has been named director of industrial relations at G. M. Giannini & Co., Inc., Pasadena, Calif., manufacturers

(*Continued on page 88*)

INDUSTRY OBSERVER

► First tests of anti-aircraft guided missiles against actual aircraft have been made by Army Ordnance at the White Sands, N. M., proving ground. Douglas-built Nike missiles have been fired at remotely controlled B-17 bombers, with better than 50% accuracy record reported in hitting the aircraft. One hit from a Nike is enough to knock a B-17 out of the sky. Army also is training troops in operational field use of both the Douglas-built Nike and the Corporal E missiles.

► **North American Aviation's first F-86H fighter bomber version of the famed Sabre series is now at Edwards AFB and should be making initial flight tests before the end of February. The F-86H is powered by the General Electric J73 axial turbojet.**

► Lord Hives, managing director of Rolls-Royce Ltd., and his chief engineer have been touring U. S. airframe plants in an effort to sell American manufacturers the Conway bypass engine for use in commercial jet transports. The Conway is expected to be used in the de Havilland Series 4 Comet. Rolls expects to be producing the Conway by 1958 and is offering U. S. manufacturers a version producing 11,500 lb. static thrust with a specific fuel consumption of .7 lb. of fuel per pound of thrust per hour.

► **Martin P5M1 Marlin has completed in 639 hr. Navy accelerated service that normally requires 1,000 hr. of flying time. The anti-submarine patrol bomber powered by two Wright R3350 Turbo-Compound engines remained air or waterborne for periods up to four days.**

► Lockheed, Douglas and Boeing are putting strong pressure on engine manufacturers for development of reverse thrust jet braking devices for use in commercial jet transports. Fred B. Lee, deputy CAA administrator, has warned that CAA considers a "thoroughly reliable means of decelerating a jet transport regardless of runway surface condition" as an operational must.

► **One of the most pressing military problems is to find a means of enabling an airplane to spot moving ground targets, such as tanks, at night. Moving target indication (MTI) which removes stationary objects from a ground surveillance radar scope won't do the job in an airborne radar because both the ground and the ground target are moving at high speeds relative to the airplane. Navy spokesman says the government would be willing to spend millions of dollars to develop a promising solution.**

► Although Bell's new anti-submarine XHSL-1 helicopter has too small a fuselage in its Navy shipboard version for use as a transport, other military services have been considering possible procurement of a stretched-out version of the helicopter, using a fuselage insert at the center of gravity like the Super Constellation and DC-6B. With its R2800 powerplant, the new Bell has a good weight-lifting potential, but needs a larger fuselage to carry cargo other than concentrated anti-submarine equipment.

► **Hiller Helicopters has moved far beyond the little Hiller Hornet in jet-tipped rotor planning and has a portfolio full of designs for large jet-tipped rotor flying cranes and transports. Some of these Hiller proposals utilize interesting new concepts in fuselage design.**

► Army Transportation Corps is asking U. S. helicopter manufacturers to consider radically different concepts in copter design that are not necessarily bound by the traditional aerodynamic streamlining associated with airplanes. For shorthaul and relatively low speeds, Army wants more attention to cargo loads and handling in fuselage design. Basically the Army wants box-like fuselages and ground level loading arrangements, the same things it has been pleading for several years to be incorporated in fixed-wing cargo aircraft.

Washington Roundup

Eisenhower on Defense

President Eisenhower, in his State of the Union message to Congress, made these observations indicating the course the new Administration will follow on defense matters:

• **Reorganize Defense Department.** "Because of the complex technical nature of our military organization and because of the security reasons involved, the Secretary of Defense must take the initiative and assume the responsibility for developing plans to give our nation maximum safety at minimum cost. Accordingly, the new Secretary of Defense and his civilian and military associates will, in the future, recommend such changes in present laws affecting our defense activities as may be necessary to clarify responsibilities and improve the total effectiveness of our defense effort."

• **Augment the role of the National Security Council,** composed of the President, Vice President, Secretaries of State and Defense, and the chairman of the National Security Resources Board, plus other government officials as may be designated by the President.

"The statutory function of the National Security Council is to assist the President in the formulation and coordination of significant domestic, foreign and military policies required for the security of the nation. In these days of tension, it is essential that this central body have the vitality to perform effectively its statutory role. I propose to see that it does so."

• **Stress economy.** "Our problem is to achieve adequate military strength within the limits of endurable strain upon our economy. To amass military power without regard to our economic capacity would be to defend ourselves against one kind of disaster by inviting another."

• **Push unification.** "Both military and economic objectives demand a single national military policy, proper coordination of our armed services, and effective consolidation of certain logistics activities.

"We must eliminate waste and duplication of effort in the armed services.

"We must realize clearly that size alone is not sufficient. The biggest force is not necessarily the best—and we want the best.

"We must not let traditions or habits of the past stand in the way of developing an efficient military force. All members of our forces must be ever mindful that they serve under a single flag and for a single cause."

Aircraft Money Picture

Spending by USAF and Navy for aircraft and related procurement continues to lag. Their big backlog of unexpended funds is only being chipped away.

However, contract letting by USAF has been at a high rate. There will be a letup, since USAF already has obligated most of its available funds.

Navy contract letting, which got off to a slow start in July, is accelerating.

Some details:

• USAF and Navy spent less than $3.7 billion on aircraft and related procurement during the first six months of fiscal 1953, July through December. This is less than a third of the $11.5-billion expenditure planned under the program submitted to Congress a year ago. Unspent funds now on hand: USAF, $24.1 billion; Navy $8.9 billion.

• USAF obligated $7.5 billion July through December, leaving only $4.5 billion for obligation over the next six months of the year.

• Navy obligated $1.7 billion, leaving $1.8 billion for obligation during the last half of the year.

Defense Money Men

House Appropriations Subcommittee on Defense, headed by Rep. Richard Wigglesworth, has completed organization, is ready to move forward on the 1954 fiscal year money bill.

Probably the most significant factor in its composition: Of the eight incumbents on the nine-member group, five are opposed to clamping a ceiling on defense spending. It is questionable, however, that they will prevail over Wigglesworth and Chairman John Taber of the full Appropriations Committee, who favor the ceiling. They didn't last year.

The subcommittee is broken into a trio of three-member working groups.

• **Air Force group** is headed by Rep. Errett Scrivner, a World War I Army artilleryman, with an inclination toward the Army position. He is skeptical of USAF's program for fast jets for ground support and thinks consideration ought to be given to less speedy and less expensive aircraft. Scrivner also is critical of Marine encroachment into Army's ground fighting mission and opposed expansion of the Corps to three divisions and three air wings last year.

Other members of the group, Rep. Roman Hruska, a Republican newcomer from the Nebraska district including Strategic Air Command Headquarters, and Rep. George Mahon, a moderate supporter of land-based aviation.

• **Navy group** includes two firm Navy supporters: Wigglesworth and Rep. Harry Sheppard. Wigglesworth raises the point that with developments in refueling, Navy attack bombers might be able to take over missions now assigned to more expensive USAF bombers of longer range. Sheppard has been a leading proponent in Congress of Navy's carrier program. Third member of the group, Rep. Harold Ostertag, a World War I Army officer, is a new member of the Appropriations Committee.

• **Army group** includes Rep. Gerald Ford, chairman; Rep. Edward Miller; Rep. Robert Sikes.

CAA, CAB Money Men

• **House Appropriations Subcommittee** that will review CAA and CAB money requests is headed by Rep. Cliff Cleavinger, with Rep. Frederic Coudert as ranking member. Strong for economy, this pair can be expected to aim for deep cuts. Top Democrat on the group is Rep. John Rooney, with a long record of off-and-on antagonism toward CAA and CAB.

• **Senate Appropriations Subcommittee** on CAA and CAB also is headed by an outstanding exponent for economy, Sen. Styles Bridges. Top Democrat is Sen. Pat McCarran, a veteran supporter of aviation on the hill. His antagonism toward CAA, over the past year, largely directed at administrator Charles Horne, may subside when appointment of a new administrator has been made.

—Katherine Johnsen

AVIATION WEEK

VOL. 58, NO. 6

FEBRUARY 9, 1953

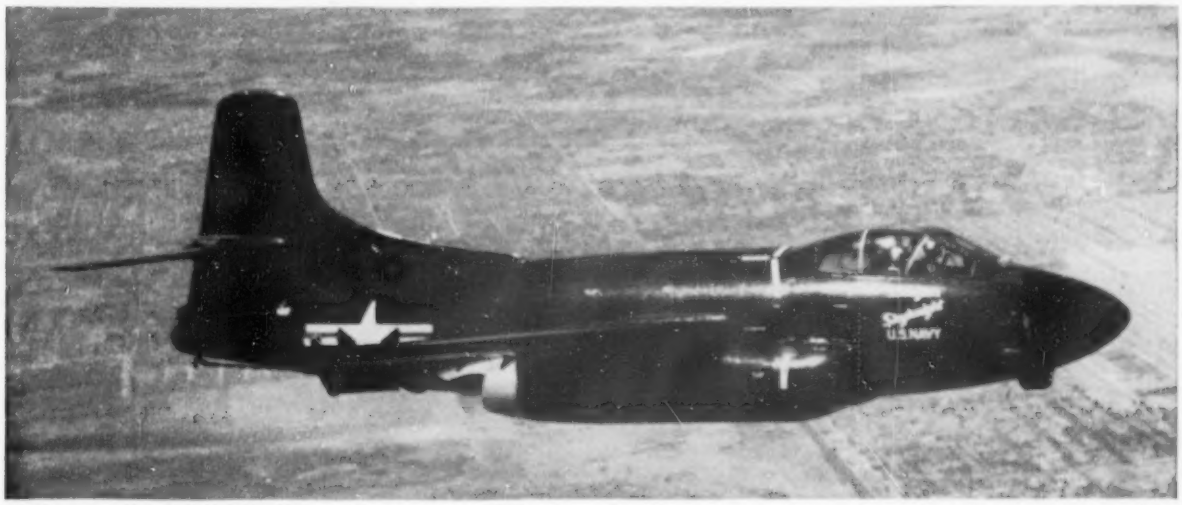

DOUGLAS F3D SKYKNIGHTS are flying cover for B-29 night raids in Korea to fight off intensified Red attacks against the Superforts.

F3Ds Outfly Red Night Fighters in Korea

- **Marine Skyknights down six Communist fighters.**
- **Douglas twin-jets defend Superforts in MiG Alley.**

By Robert Hotz

Marine pilots patrolling MiG Alley at night in Douglas F3D twin-jet Skyknights have shot down at least six Communist night fighters, including the Russian-built MiG-15.

The Marine victories are believed to be the first clash between jet fighters at night and were scored during a period of rapidly increasing Communist night attacks against USAF Boeing B-29 Superforts bombing targets south of the Yalu River. Five B-29s have been shot down by Red night fighters during the past few months.

First Marine kill was made by a night-fighter team consisting of Maj. William Stratton, pilot, and Master Sgt. Hans Hoagland, radar operator, early in November. Allied ground radar tracking an enemy target vectored Maj. Stratton's plane into range of the Skyknight's airborne radar, allowing Sgt. Hoagland to guide his pilot onto the tail of the enemy jet. Stratton was able to make visual contact on the glow of the enemy's tailpipe and fired his first burst of 20-mm. cannon shells into the Communist's wing.

TWIN-JET F3Ds have shot down six Red fighters in night battles over MiG Alley.

► **Score Hit**—The second burst hit the enemy's engine, causing an explosion and fire. Maj. Stratton reported flying through debris from the enemy fighter which burned and crashed. Stratton, a reservist, is now on inactive duty, working for the Hughes Aircraft Co. in Culver City, Calif.

A few nights later the team of Capt. Oliver Davis and Warrant Officer Dramus Fesler maneuvered by radar onto the tail of a MiG-15 and destroyed it with a burst of 20-mm. cannon fire into the tailpipe. The MiG was hit while in a tight turn, apparently trying to escape the Skyknight's cannon shells.

Another Marine Skyknight, piloted by Lieut. A. J. Corvey, shot down three piston-powered Communist fighters in a single night mission over MiG Alley. Lieut. Corvey's victims were believed to have been Russian Yak 9 fighters.

► **Other Red Victims**—Since then, the

OBSOLESCING B-29 BOMBERS taking off for bombing raids over Korea now are escorted by Marine F3Ds on night forays.

Skyknights have continued to operate successfully against the assortment of Communist fighters being thrown into the recently intensified night attacks against Allied bombers. At last report, at least two more Russian-type jets had been destroyed, although details are lacking. The Skyknights also have been used as fighter escort for B-29s on night missions over North Korea. B-29s have shot down three Red fighters recently.

The Marine pilots are from the Flying Nightmares, a night-fighter squadron originally trained in Skyknights at El Toro. They have been in Korea since last summer. Other types of night fighters in operational use in Korea include the Chance Vought F4U-5N Corsair, the Grumman F7F Tigercat and the Lockheed F-94 Starfire, but there have been no reports of their successfully engaging enemy fighters at night. The piston-powered Corsairs and Tigercats have been used primarily for attacking enemy truck convoys and supply trains at night.

► **Variety of Red Fighters**—Allied bomber pilots have been encountering a variety of Communist fighter types at night for more than a year, including both piston- and jet-powered types, but until recently their attacks were uncoordinated and relatively ineffective. Lately, however, the Communist night fighters have been working closely with ground radar and searchlights to spot and attack B-29 and B-26 bombers operating against the vital supply lines stretching south into Korea from the Yalu River.

USAF reported that one B-29 shot down the night of Jan. 13 was attacked by 12 enemy jet fighters that obviously were being vectored onto their target by ground radar. There is no evidence to date that the Communists are using any night fighters equipped with airborne radar, although there is a radar-equipped model of the MiG-15 in service with the Russian air force. Nor is there any evidence of the use of air-to-air rockets over Korea, although the Communists have been using ground-to-air rockets against night bombers for some time.

Damage to returning B-29s indicates the standard range of Communist fighter armament, from machine guns to 37-mm. cannon, is being used by enemy night fighters.

► **Attacks Increase**—The increasing scale of night attacks against the B-29s raises the question of how much longer Far Eastern Air Forces can continue to use this obsolescent equipment against the growing strength and expanding defensive capability of the Communist air forces based in Manchuria.

Aggressive attacks by substantial quantities of Russian-built MiG-15 jet fighters drove the B-29s out of the daylight skies over North Korea late in 1951 and although military losses have not yet become prohibitive, military observers wonder if USAF will soon be forced to use more modern bombers to keep up the weight of its 'round-the-clock attack on North Korean targets. USAF recently has noted the appearance of more than a hundred Russian-built twin-jet IL-28-type bombers in Manchuria, with several hundred more in adjoining maritime provinces of Siberia.

The Skyknight was built by the El Segundo Division of Douglas Aircraft Co. It is powered by two Westinghouse J34 axial turbojets of 3,600 lb. thrust each and carries a Westinghouse APG-35 airborne radar. Armament consists of four 20-mm. cannon. Pilot and radar operator sit side-by-side in the cockpit. Plans to develop a sweptwing version of the Skyknight powered by later model Westinghouse engines were abandoned by the Navy about a year ago. Navy officers have publicly testified that the Skyknight successfully intercepted other jet night fighters in darkness above 40,000 ft. in operational tests over Patuxent River, Md., three years ago.

Korea Air Losses

A total of 1,172 Air Force, Navy and Marine aircraft have been lost to enemy action in the 30 months of the Korean war, according to official Defense Department statistics. Of this total, USAF losses were 701 planes, while the Navy and Marines lost 471 planes in action.

The Navy has also announced its operational losses incurred in Korea and surrounding waters as an additional 562 planes. USAF does not announce its operational losses. Operational losses include all aircraft lost from all other causes except enemy action over enemy territory. They are generally equal to or slightly higher than combat losses.

Unofficial estimates place the total Korean combat and operational losses of all services at about 2,400 aircraft.

Comet Problem

- **Complications develop as U. S. approval is sought.**
- **CAA may insist on own Series 3 test program.**

Serious complications were developing in Washington last week over the British problem of getting the de Havilland Comet 3 jet transport certificated by the U.S. so Pan American World Airways can operate the Comets it has ordered (AVIATION WEEK Oct. 27, p. 13).

After a week's preliminary skirmishing between U. S. Civil Aeronautics Administration and the British Air Registration Board representatives in a Washington conference, the situation appeared to resolve itself into a virtual stalemate on this point:

Will the U. S. accept the British certification of Comet 3 tests as meeting American transport requirements, or will CAA decide to make independent flight tests of the Comet and render its own final verdict?

Some unofficial U. S. observers forecast an unfavorable outcome of the Comet case would have a lasting effect that may set back progress in the International Civil Aviation Organization as much as five years.

▶ **British Position**—The four-man British delegation, which is headed by Robert Hardingham, secretary of the British ARB, came to Washington with a request for a CAA statement on U. S. requirements for certification of the Comet 3. Basically, the British said:

Here are the requirements for British certification of the Comet 3; now, you tell us in detail what else CAA wants the Comet to do to get U. S. certification and we'll get this done within reason, and certify that it has been done.

CAA administrator Charles F. Horne told AVIATION WEEK that CAA has not yet determined whether or not it would insist on its own flight tests of the Comet 3, in addition to British tests to U. S. standards. He said that as far as he could tell no controversy existed between the two delegations, adding, "It could not exist until the British make a proposal and we reject it. This has not happened."

British objections to any CAA policy requiring U. S. flight tests of the Comet 3 in addition to British certification to U. S. standards, appear to be that it denies the competency of the ARB to make such tests and strikes a serious blow at the international air principle of reciprocal registration. There also is apprehension, informed sources tell AVIATION WEEK, that CAA flight tests, if made, may call for additional requirements for changes. Such changes, if not anticipated in the building of the airplane, could result in costly additional modifications.

BRITISH-U. S. representatives at Washington meeting on certification of jet transports (seated left to right): H. C. Black, R. H. Warde, J. G. M. Pardoe and R. E. Hardingham of British Air Registration Board; Charles F. Horne, CAA administrator; John Chamberlain, director, CAB Bureau of Safety Regulation; George Haldeman, CAA jet team chairman; (standing left to right): Henry T. Snowdown, State Department; F. W. Austin, British ARB; F. B. Lee, CAA deputy administrator; W. E. Koneczny, chief, CAB Airworthiness Division; E. S. Hensley, director, CAA Office of Aviation Safety, and Omer Welling, acting chief, CAA Aircraft Engineering Division.

▶ **Comet Changes**—There are several changes that CAA already has indicated it probably wants in the Comet 3 before certification:

- Double-glass enclosures of windows for additional safety.
- Rating engine power less than engines could deliver when new to allow for deterioration in service.
- British landing requirements provide for landing within 70% of runway length, while U. S. requirements provide for landing within 60%. This is expected to be adjusted to U. S. standards.

▶ **U. S. Jet Policy**—In addition to these, there is a long list of tentative U. S. policies on turbine-powered transports that is under continuing revision. The last statements of CAA policy on airworthiness requirements for certification of turbine-powered transports was issued a year ago, and a new revision is now in process.

Some aviation analysts point out that if CAA insists on its own testing program on the Comet 3, it may bounce back when U. S. jet transports come up for British certification. British acceptance of some current American piston-powered transports on the basis of U. S. certification, despite failure to meet entirely all British requirements, also is cited as a precedent for jet reciprocity.

▶ **Performance Requirements**—Behind the conflict over what flight test shall be accepted is a continuing international debate over standards for performance, which has kept an international performance committee in session at six-month intervals under ICAO leadership for several years.

U. S. standard of flight performance is based generally on an engineering formula relating stall speed of an airplane to its forward velocity. European performance standards are based generally on past experience of what have proved to be safe speeds in various flight conditions.

The 15-year-old American standard has produced safe airplanes in performance, and the CAA technical staff is not prepared to relinquish it without indications of an improved standard that will permit at least equivalent safety.

▶ **Jet Transport Problems**—Based on the unrevised 1952 jet transport policies, here are some problems CAA believes need investigation:

- Turbojet aircraft, as compared with propeller aircraft, will not have slipstream over the wing—a difference that will show up in takeoff requirements.
- Performance of turbine aircraft is more critically affected by temperature changes than propeller aircraft.
- Absence of reverse propeller thrust and propeller drag will mean greater reliance on brakes, auxiliary drag and reverse thrust turbines for jet aircraft.
- Longitudinal control at high jet speeds presents problems that need attention in whatever range and altitude the airplane is to be certificated.
- Differences in structural characteristics—such as thick skins, swept wings and structural deformations—mean new structural testing requirements.
- Design requirements must take into account new high and low temperatures encountered in jet operations.
- Hydraulic, pneumatic or electrical control systems, which are replacing mechanical systems, entail the problem of requiring standby alternate systems in the event of failure.

▶ **Conference Continues**—Washington forecasts are that the British-U. S. sessions will continue for another week.

Participating with Hardingham are

British specialists R. H. Warde, powerplants; H. C. Black, flight tests, and J. G. M. Pardoe, structures.

U. S. conferees are headed by George W. Haldeman, chairman of the recently named CAA Jet Transport Evaluation Committee. Other members of this committee and CAA technical representatives, called in on special subjects, attended the conference.

Ray Meloy, CAA flight test chief, heads the U. S. committee on performance requirements, which is going to Paris in May for another ICAO session on this problem. —A. McS.

Mooney Aircraft Moves to Texas

Mooney Aircraft Co. moved its entire factory last week from Wichita to Kerrville, Tex., in an effort to increase production of the single-place Model 18 and speed development of the new four-place Model 20.

Expansion of facilities and increased employment of skilled personnel, made possible by the move to Kerrville, will permit test flights of the Model 20 within 60 days, executive vice president Al Mooney says. The new single-engine plane is scheduled for marketing by mid-summer.

Charles G. Yankey, Mooney president, says the decision to move the aircraft plant was based on inadequate facilities and shortage of aircraft technicians and production workers at Wichita.

Employment will be tripled to 150 persons, Yankey says.

The company's field in Wichita was located adjacent to the Air Force B-47 flight training base, limiting expansion of aircraft factory and test programs.

Review of Aviation Policies Under Way

The congressional session moved forward last week with these developments affecting aviation:

• **Senate Interstate and Foreign Commerce Committee's** chairman Charles Tobey reported plans to give early consideration to airmail subsidy separation legislation and later look into British advances in jet air transportation. Sen. Edwin Johnson and Sen. John Kennedy have drafted subsidy separation bills.

• **House Interstate and Foreign Commerce Committee** is making general review of all agencies under its jurisdiction. Chairman Charles Wolverton plans to call Civil Aeronautics Board and Civil Aeronautics Administration officials to appear before the committee for progress reports and education of new members.

• **House Armed Services Committee** has voted to continue an investigating subcommittee to watch the defense program.

• **Senate's Preparedness Subcommittee**, headed last year by Sen. Lyndon Johnson, probably will be continued with a Republican leader.

• **Post Office and Civil Service Committee** of the Senate plans a thorough investigation of the postal service, including airmail postal rates, revenues and expenditures for airmail service, and subsidies to airlines. A resolution authorizing the investigation has been introduced by Chairman Frank Carlson and Sen. Olin Johnston, ranking Democrat on the committee.

Bills which have been introduced include:

• **Prototype development**: A measure

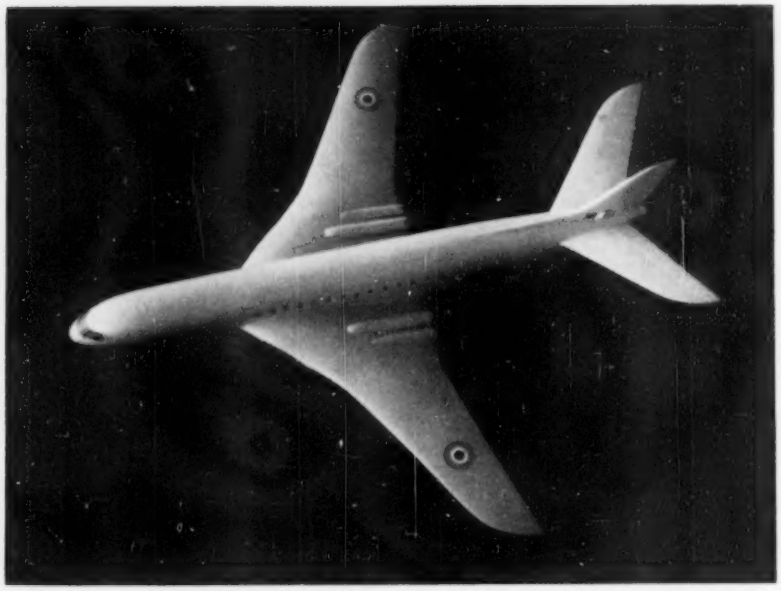

VICKERS JET TRANSPORT (in model), may carry 150 passengers, have 2,000-mi. range.

Britain Announces New Jet Liner

By Nat McKitterick
(McGraw-Hill World News)

London—Great Britain's fourth turbine-type transport was unveiled last week with announcement of the Vickers 1000, prototype of which has been ordered for the Royal Air Force Transport Command.

At the same time, Vickers announced a civil version of the transport, the VC-7, now in the design stage. Both projects were designed by George Edwards, Vickers' chief designer and creator of the Valiant and Viscount.

▶ **BEA Interest**—The Vickers 1000 will be the first project to utilize Rolls-Royce bypass jets. With four Conways, claiming some 30% saving on fuel costs (consumption figures for engine already are down around .5 lb./lb./hr.), Vickers claims the VC-7 will have equal use on short continental hops as on very long trans-Atlantic hops. British European Airways is reported highly interested in the development.

No performance figures have been released, but last November Air Minister Lord de L'Isle and Dudley foresaw a jet troop carrier this way:

"We can now conceive an aircraft leaving England at noon, climbing to 45,000 or 50,000 feet, and delivering its load of 150 passengers in Egypt by tea time."

That spells a speed in excess of 500 mph. and a range in excess of 2,000 miles.

▶ **Specifications**—The Vickers project is Britain's biggest jet liner venture to date. Fuselage length will be 146 ft., as against 110 ft. for the Comet 3. Wingspan is 140 ft., or about 20 ft. wider than the Comet 3 and the Valiant bomber. Height is set at 38 ft., 6 in.

Wingform is superficially like the compound sweep of the Valiant, except that wingtips are tapered instead of square. All external resemblance to the Valiant ends there.

Tailplane is swept and flush with low main wing. Present conventional British characteristics of low wing-loading, with engines buried in wingroots, are followed in the new Vickers project.

Given development and testing time, the earliest Transport Command can expect its first Vickers 1000 will be 1957. No production orders for either type have been placed.

proposed by Rep. Carl Hinshaw would authorize government loans to aircraft manufacturers up to $15 million to finance 75% of the developmental cost of jet transport aircraft.

• **Aviation training:** Another Hinshaw measure would authorize CAA to finance 75% of the cost of training aircraft and engine mechanics, instrument and electronics technicians, pilots and other flight and ground personnel.

• **Interservice transfer** of military officers, recommended by Defense Department, is provided for in a Hinshaw bill. Approval of the officer and the Secretaries of the two departments concerned would be required.

• **Independent air safety board** of five members is proposed in legislation introduced by Sen. Pat McCarran.

• **Customs expense:** Air carriers would be exempted from the requirement to pay overtime compensation of customs employes by another bill offered by Hinshaw.

Engine Trouble Found

Oil dilution as an airline maintenance practice for cold weather starting was blamed for R4360 Wasp Major engine trouble in BOAC's Boeing Stratocruisers, as the first six of the 10-plane fleet were returned to service last week. Of 15 engines torn down for examination, 11 showed evidences of overdilution of engine oil with aviation gasoline, CAA sources report.

Other difficulties disclosed in the teardown of Pratt & Whitney R4360s included piston pin plug failures, two knuckle pin failures, one cam lobe and one master rod cap.

BOAC Stratocruisers were grounded last month after reports of piston "seizing" (AVIATION WEEK Feb. 2 p. 17).

Plane Fastener Fight Nears End

Military may accept Camloc quick-release type in settlement of 14-year standardization controversy.

By Alexander McSurely

A million-dollar technical standardization controversy over a 30-cent quick-release fastener for aircraft assembly appears to be on its way to settlement following an industry-armed forces conference at Wright Air Development Center, Dayton, Ohio.

It is too early to predict how the controversy will end, but U.S. aircraft manufacturers who have been pushing for the settlement say thorough airing of the problem at the conference is a healthy preliminary sign.

The controversy involves two types of fasteners. One was made to a military specification ordered by the Air Force and Navy, designated MIL F-5591. The other, a fastener built by the Camloc Fastener Corp., recently was designated NAS 499 by the National Aircraft Standards Committee of Aircraft Industries Assn.

▶ **Possible Outcome**—Final outcome may be admission of both specifications as standard, eliminating expensive and time-wasting special deviation orders. A second alternative to drop the military specification and standardize only NAS 499 is what many airframe manufacturers would like to have accomplished ultimately.

Charges and countercharges in the 14-year-old controversy boil down to this:

Camloc refused to change its fastener design when the military authorities set up the MIL F-5991 specification, while other companies went along with service procuring agencies to build the fastener they specified.

Things would have been different, if the U.S. aircraft manufacturers had been satisfied with the military specification fastener. Instead, they prefer the Camloc fastener. It stays fastened better, they say.

▶ **Manufacturer and Airline Preference**—Last month the NAS committee reported to the Air Force and Navy that 12 of the principal manufacturing plants producing military aircraft are using the NAS 499 (Camloc-type) fastener in their work.

Representatives of nine of the companies attended the Dayton session to decide which fastener to use. At the meetings were representatives of Boeing-Wichita, Boeing-Seattle, Chance Vought, Convair-San Diego, Douglas-El Segundo, Hughes Aircraft, Piasecki and Republic.

Other plants using the fastener include Douglas-Santa Monica, Convair-Ft. Worth, all Lockheed plants, Ryan, and Sikorsky. Hughes, Kaman, and Northrop use the Camloc-type fasteners on experimental contracts.

It also was reported that the NAS fastener is being used by a majority of the principal airlines.

Presiding at the Wright Air Development Center meeting was Lt. Col. E. M. Huntington of the Munitions Board Aircraft Standards Group. Seven other officers and 13 civilian engineers representing USAF and Navy Bureau of Aeronautics attended.

Presenting aspects of the problem

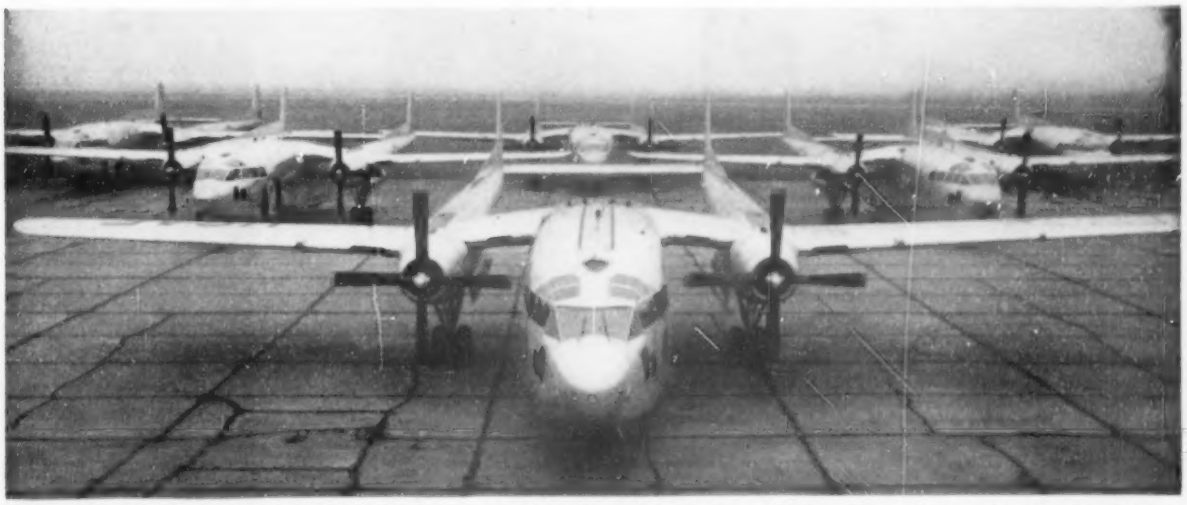

THE LARGEST SINGLE DELIVERY of Kaiser-Frazer-built C-119F Packets lined up at Willow Run, Mich., awaiting weather clearance for flight to Mitchel AFB, L. I., N. Y. These planes are assigned to the 514th Troop Carrier Wing.

were representatives of the following fastener companies: Amloc, Dzus, Lion, Monadnock, Packmayer, Scovill, Shakeproof, and United Carr.

► **Camloc Advantages**—A list of technical advantages of the NAS 499 type fastener over the MIL F-5591 presented by the Aircraft Standards Committee was considered at the meeting.

Among other points, it was reported that plus-minus range of torque and tensile requirements fo the NAS 499 fastener permits standardization on one-third the number of studs that would be required if the MIL F-5591 fastener were used.

Strength requirements also permit use of one NAS fastener size, where two sizes of the military fastener would be required.

These combined factors make it possible to use a stock inventory of approximately one-sixth the number of stud lengths with the NAS 499 fastener.

► **Million-Dollar Costs**—Estimates of million-dollar costs involved in the controversy refer to the number of engineering changes that have been required in various airplanes, deviations required to permit use of the NAS 499 fastener as replacement for the MIL F-5991 fastener, engineering manhours consumed on conferences, and number of parts numbers that have been set up and changed.

Aircraft manufacturers say a fastener that will "button up" engine cowls, plates, doors and accessory equipment of today's high-speed aircraft is up against a job far tougher than the one contemplated when the original military specification was set up.

► **C-124 Story**—One illustration of the fastener controversy centers on the huge Douglas C-124 four-engine transport. At the time the USAF's 6-8-9 inspection board arrived to pass judgment on the Globemaster, its engine cowlings were locked with the military specification fastener. When Douglas opened the cowlings, the engineers couldn't get them to fasten shut again.

The board was forced to wait until an aircraft laboratory specialist was called from Dayton to issue a deviation order necessary for substitution of the Camloc fastener.

► **Firm Military Stand**—What is behind the military refusal to accept the apparent industry preference on the merits of the two specifications?

Some industry observers say it is a military stubbornness against retreating after a position has been taken. But another factor is the positive attitude of fastener companies who complied with the military specification. They have a united front against the Camloc fastener to support continued use of present military specifications, some aircraft manufacturers say.

Although the controversy seems out of proportion to the value of an individual item, the widespread use of fasteners in today's aircraft and missile programs makes the problem important. Several hundred fasteners may be used on a small aircraft and as many as 3,000 on one big bomber. Multiply the number of fasteners per airplane by the thousands of aircraft in USAF and Navy programs, the thousands of missiles just entering production, the replacement and spares programs for all of these, and the fastener dollar volume mounts rapidly to big business.

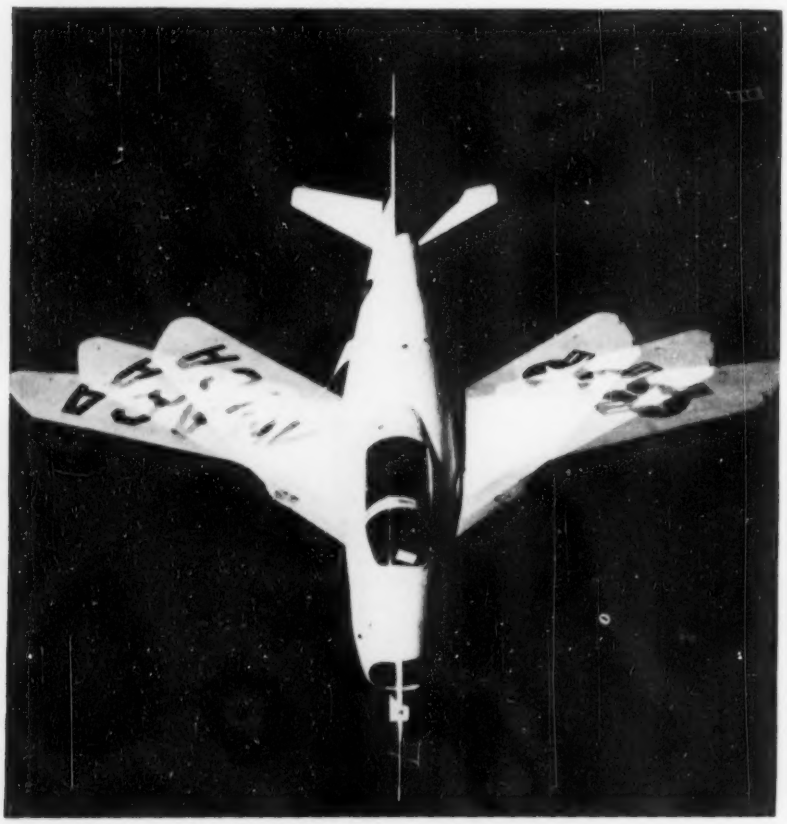

X-5'S CHANGING WING SWEEP

How the Bell X-5's wings can be swept while in flight is graphically shown in this multiple-exposure ground shot. As the wingtips move back, the wingroot portions move forward. More than 60 flights have been made with the X-5 research plane by Bell, USAF and NACA pilots at Edwards AFB, Calif. The craft is making possible accumulation of data on high subsonic speed flight as well as variable sweepback.

BuAer Speeds Up Contracting System

Navy's Bureau of Aeronautics signed the first of a series of basic agreements with airframe manufacturers last week by which it expects to save time and trouble in setting up future contracts with its major contractors.

The new agreement was signed with Lockheed Aircraft Corp. by Rear Adm. T. S. Combs, Chief of the Bureau of Aeronautics, and Courtlandt Gross, executive vice president of Lockheed. Other agreements will follow, Navy reveals, with about 15 contractors. (USAF has been using this procedure several years.)

The Lockheed agreement, signed for one year, will apply to all contracts drawn up by the Navy through 1953. So far, four production contracts are planned for negotiation with Lockheed this year.

A basic agreement sets up the general conditions under which all future contracts will be written. The language of clauses is definitely established to save argument over the general provisions of future contracts. Thus contracts can be negotiated more quickly.

In writing a contract, details of quantities, prices, specifications, delivery and other specific conditions will be set forth in full. General provisions in the basic agreement merely will be referred to in the contract.

"Although we have contacted the airframe manufacturers first," Adm. Combs said, "we hope to work out similar agreements with component manufacturers."

POWER

EEMCO

technical bulletin

WEIGHT

POWER

WEIGHT

Greater output per pound is the constant objective of the aircraft designer. EEMCO serves this goal by turning out new electric motors with increased power, decreased weight and all the required operating characteristics. This tough new lightweight for driving a compressor was built to the latest Army and Navy specifications. Operating on 27 volts D.C., it provides 3 horsepower under continuous duty at sea level, 2½ h.p. at 50,000 feet with duty cycle of ½ hour on—½ hour off. It weighs only 13½ pounds with integral gear box of 2¾ to 1 reduction.

Doubled plant capacity and new facilities enable EEMCO to keep pace with the growing need for these specialized designs. Today EEMCO motors and actuators are found on virtually all U. S. Aircraft.

ELECTRICAL ENGINEERING & MANUFACTURING CORP.

4612 West Jefferson Boulevard
Los Angeles 16, California

3-514

Here is the AIRLINER AUTOPILOT

A proven autopilot that sets a new high standard of precision flying from take-off to landing approach.

The rugged lightweight Lear L-5 features automatic altitude control, automatic approach coupler, automatic protection from hard-over signals – plus automatic safety release for manual control with a correctly trimmed aircraft. Plug-in replacements assure quick, low-cost maintenance.

The Lear L-5 and its military version – the versatile F-5 – are flying a wide range of aircraft, from jets to multi-engine transports . . . they're frequently called "The Pilot's Autopilot."

Before you install an autopilot – *and you will* – let a flight demonstration show you why the Lear *L-5 Airliner Autopilot* is what you have been waiting for.

The Collier Trophy

Aviation's highest award – recognition to William Lear for development of Autopilot and Approach Systems.

LEAR, Inc. LEARCAL DIVISION, 11916 W. PICO BLVD., LOS ANGELES 64, CALIFORNIA
Grand Rapids Division, Grand Rapids, Michigan, Romec Division, Elyria, Ohio

One of the World's Oldest and Largest Producers of Airborne Electronics

Big Bell Stock Sale Reported by SEC

Purchase of 427,876 shares of Bell Aircraft Corp. common stock by Equity Corp. from First York Corp. in merger is reported in the latest Securities and Exchange Report.

Other aviation stock transactions reported:

Air Associates, Inc.: Earl M. Newlin, director, sale of 13,520 common shares, total holding, and sale of 1,598 common shares in trusts, leaving a total holding of 1,598 shares; Earl M. Newlin, sale of 300 preferred shares in trusts, total holding.

Airfleets, Inc.: George Lusk, officer, purchase of 100 common shares, making a total holding of 607 shares.

All-American Airways: Robert M. Love, officer and director, sale of 3,345 common shares, leaving a total holding of 48,000 shares.

Allis-Chalmers Mfg. Co.: J. L. Singleton, officer and director, purchase of 200 common shares, making a total holding of 260 shares.

Capital Airlines, Inc.: J. H. Carmichael, officer, sale of 137 common shares, leaving a total holding of 5,000 shares.

Colonial Airlines, Inc.: Francis Hartley, Jr., director, sale of 2,000 common shares, leaving a total holding of 2,804 shares.

Consolidated Vultee Aircraft: Floyd B. Odlum, director, purchase of 5,000 common shares, total holding.

Continental Air Lines: Lawrence C. Anns, director, purchase of 100 common shares, making a total holding of 300 shares.

Fairchild Engine and Airplane Corp.: Paul J. Frizzell, officer, purchase of 100 common shares, total holding.

Flying Tiger Line, Inc.: Wm. E. Bartling, officer, sale of 200 preferred shares, total holding.

Glenn L. Martin Co.: Wm. Barclay Harding, director, purchase of 203 common shares, total holding.

Minneapolis-Honeywell Regulator Co.: C. B. Sweatt, officer and director, sale of 2,000 common shares, leaving a total holding of 44,505 shares; sale of 2,530 common shares in trusts, leaving a total holding of 7,345 shares; Harold W. Sweatt, officer and director, sale of 2,530 common shares in trusts, leaving a total holding of 2,600 shares; A. M. Wilson, officer, sale of 200 common shares in trusts, total holding; P. P. Wishart, officer, purchase of 100 common shares, making a total holding of 680 shares.

National Airlines, Inc.: J. C. Brawner, officer and director, purchase of 100 common shares, making a total holding of 160 shares.

Northwest Airlines, Inc.: Alonzo Pelteys, director, purchase of 500 preferred shares, making a total holding of 2,000 shares.

Ryan Aeronautical Co.: Melvin H. Lockett, director, purchase of 1,000 common shares, making a total holding of 2,000 shares; T. Claude Ryan, officer, director, beneficial owner, purchase of 119 common shares, making a total holding of 49,203 shares.

Seaboard & Western Airlines, Inc.: Harold Monroe, officer, purchase of 200 common shares, making a total holding of 400 shares.

Solar Aircraft Co.: E. Franklin Hatch, director, purchase of 200 common shares, making a total holding of 400 shares.

Sperry Corp.: Thomas G. Dee, director, purchase of 2,500 common shares, making a total holding of 2,700 shares.

Trans World Airlines: George H. Clay, officer, purchase of 200 common shares, making a total holding of 600 shares; E. O. Cocke, officer and director, purchase of 443 common shares, making a total holding of 1,143 shares; John A. Collings, officer, purchase of 400 common shares, making a total holding of 1,101 shares; Ralph S. Damon, officer and director, purchase of 700 common shares, making a total holding of 3,300 shares; Warren Lee Pierson, director, purchase of 600 common shares, making a total holding of 3,460 shares.

United Aircraft Corp.: Joseph P. Ripley, director, purchase of 500 common shares, making a total holding of 1,000 shares.

United Aircraft Products, Inc.: John M. Meyers, officer and director, purchase of 500 common shares, making a total holding of 4,500 shares.

New African Aircoach

(McGraw-Hill World News)

Johannesburg—All major carriers on the London-Johannesburg run are expected to add tourist flights to their services next year. The move is planned for after Oct. 1, when first-class fares go up approximately $14 to $500. Tourist tariff will be about $375 one way and $680 roundtrip.

South African Airways is converting its Constellations to seat 60. BOAC and Central African Airways will open low-cost flights between London and the Rhodesias this month.

ROTOR BLADE ICING RESEARCH

Heating equipment is shown being installed on rotor hub of a Piasecki HUP helicopter stationed atop Mt. Washington, N. H., for study of icing conditions on rotor blades. The severe conditions on the peak of the 6,288-ft. mountain make it a natural laboratory for aviation studies. The copter is secured to a large trailer.

Get the Finest

OXYGEN EQUIPMENT

from ZEP

Zep supplies only the latest approved types of all-new oxygen equipment for airframe manufacturers and installations for executive aircraft.

Oxygen catalog will be sent on request.

Regulators—Demand and Positive Pressure Types A-12A and A-14

Cylinders—Low Pressure G-1, D-2,A-6, J-1 and portables

Regulators—Continuous Flow High & Low Pressure Types—AN 6010-1A and A-2000



Breathing Hose Assemblies—AN 6003 Series & Radio-wired Hose Assemblies

Check and Line Valves—High and Low Pressures

Government approved source for overhauling and servicing of military aircraft oxygen equipment

CAA APPROVED OXYGEN REPAIR STATION a073

ZEP AERO & BREATHING EQUIPMENT CO.

5907 W. Imperial Hwy., Los Angeles 45, OR. 8-5181

NOW...

ALTITUDE TRAINING FOR GROUND AND FLIGHT PERSONNEL

Now your ground personnel can be quickly trained in the inspection and test of high altitude oxygen equipment. Courses for engineering, installation and service personnel are also available. Facilities include altitude chamber for indoctrination of pilots and flight personnel. Write for full information.

ALTITUDE INCORPORATED

109 Sheldon St., El Segundo, Cal., OR. 8-1161

The Most Trusted Name in Ignition

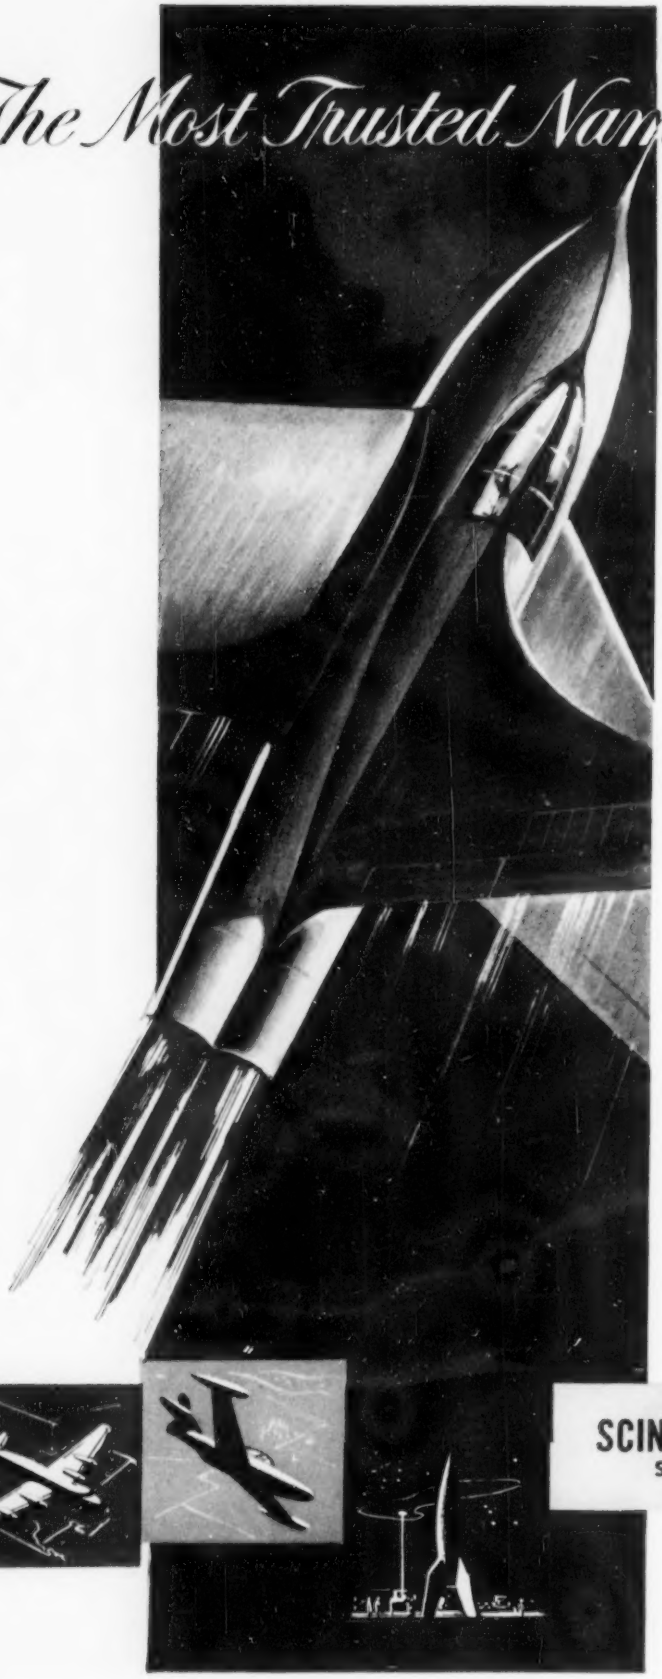

meets the operating needs of every plane

No single type of ignition equipment is the final solution to every operating problem. That's why Bendix approaches each new assignment with an open mind. The particular type of ignition system recommended is decided on the basis of meeting individual requirements for economy, performance and dependability.

Of one thing you can be certain, from the broad Bendix experience and unrivaled facilities will come ideas and products tailored to your needs. For piston, jet, turbo-jet or rocket engines every component part of your ignition system will meet the uncompromising standards of quality established by Bendix over a quarter of a century ago.

This combination of facilities and skill is ready to go to work for you in the solution of any ignition problem from planning to finished product.

AVIATION PRODUCTS

Low and high tension ignition systems for piston, jet, turbo-jet and rocket engines . . . ignition analyzers . . . radio shielding harness and noise filters . . . switches . . . booster coils . . . electrical connectors.

Bendix

SCINTILLA MAGNETO DIVISION

SIDNEY, NEW YORK

Export Sales: Bendix International Division
72 Fifth Avenue, New York 11, N. Y.

FACTORY BRANCH OFFICES: 117 E. Providencia Avenue, Burbank, California • Stephenson Building, 6560 Cass Avenue, Detroit 2, Michigan • Brouwer Building, 176 W. Wisconsin Avenue, Milwaukee, Wisconsin • 582 Market Street, San Francisco 4, California

FACTS FOR FILING

Organization of Department of the Air Force

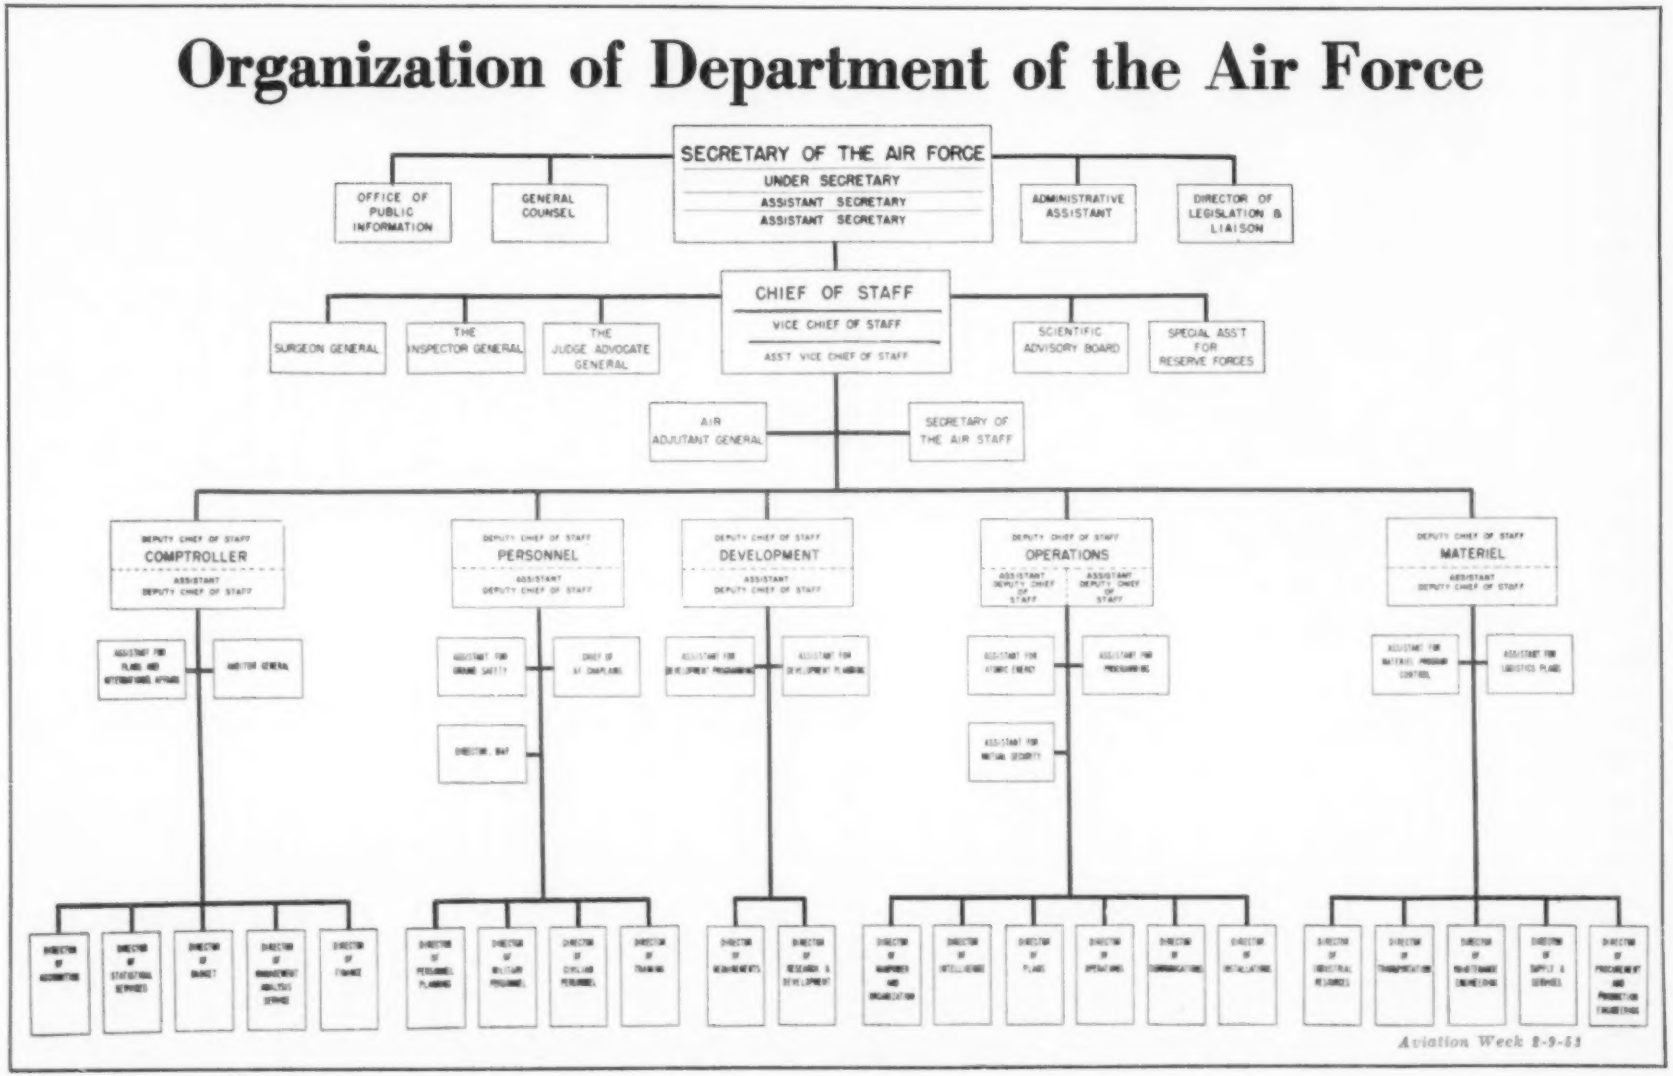

About Littlewood

William Littlewood, vice-president engineering of American Airlines, is internationally recognized for his contribution to the development of the modern airliner. His first aviation connection was with Fairchild Engine Co., of which he became general manager. There he helped develop and produce several important aircraft engines.

In 1930 he came to American Airways (predecessor of American Airlines) and was made chief engineer three years later. He was elected vice president-engineering of American Airlines in 1937, and named to the corresponding post for American Overseas Airlines in 1945.

He received the 1935 Wright Brothers award for "outstanding contribution to aviation."

The DC-3, to which he points in this picture, was built to Littlewood's specifications by Douglas Aircraft Co. for American, which put it into service in 1936. Littlewood was also important in the development of the Convair 240 and Douglas DC-6 airline transports.

Littlewood delivered the 16th Annual Wright Brothers Lecture in Washington this past year, laying down a broad guide that the designers of tomorrow's transports could follow. This talk is also being presented before various technical and industry groups in the country by Otto E. Kirchner, director-operational engineering, American Airlines.

A news story about Littlewood's speech was carried in Aviation Week, Dec. 22, p. 17. But in view of its importance to industry circles, we are printing extensive excerpts from it. The first of two parts appears below.

Littlewood Analyzes Transport Trends

- **In the past, aircraft size and capabilities have risen steadily, but largely as a matter of expediency.**
- **For the future, likely direction of growth as well as immediate needs should figure in plane design.**

There has been a constant development with time of larger and larger transport units with obviously longer-range capacities and applications. There has also been an underlying development with some increase in size of essentially shorthaul transports.

Today, of course, the longhaul airplanes are typified by the Lockheed Constellation, the Douglas DC-6 and the Boeing Stratocruiser, varying from approximately 100,000 to 150,000 lb. in gross weight. The shorthaul airplanes are typified by the Consolidated Vultee 240 and 340 and the Martin 4-0-4, ranging from 40,000 to 50,000 lb. gross weight. . . .

▶ **How They've Grown**—Wing span has shown a significant average growth in 25 years from about 50 feet to more than double that value (Fig. 1). Fuselage length . . . shows a significant increase at a more rapid rate from an average of about 30 to a modern value of more than three times that amount.

The rate of increase of fuselage length to wing span ratio is rather interesting in that it indicates some change in aerodynamic proportioning, and shows the method by which air transport capacity has been most logically increased—namely, by increases of fuselage length. The Lockheed Constellation has had some 18 feet added to its initial length, and the Douglas DC-7 will have had some 12 feet added. This seems to be a significant thing to keep in mind with respect to future transports.

One requirement of a modern contract and specification should be the advanced determination and agreement of a definite plan for capacity growth as powerplants of increased size become available in the future. Growth of any individual model in the past has been largely a matter of expediency. Since high performance aircraft of the future will be limited by Mach drag-rise design characteristics, the direction of growth will probably be least in speed and mostly in range and/or capacity.

If the airplane is initially planned for a defined operation, the range requirements will be built in from the beginning. Therefore, the normal direction of growth, with increased power or thrust available, will be in the direction of increased capacity. Plans for such a growth program should be incorporated in the initial model so that it can be accomplished with the least expense and trouble. . . .

▶ **Crew Size**—Early crews were one man. The common problem of physiological and psychological reliability of the human being, as well as the parallel question of reliability of a single powerplant, brought about almost simultaneously the early transition to a minimum flight crew of two, as well as a minimum powerplant arrangement of the same number. . . .

Crew growth thereafter was in consideration of additional segregated functions to be performed. As the needs of the passengers became evident, cabin crews were added, and as the needs of the cockpits and their manifold equipment became apparent in the larger airplanes, flight engineers were added. For the very largest airplanes multiple cabin crews are necessary to perform the quantity of tasks required, and for some uses of the airplane, particularly long-range, over-water operations, some

Littlewood's Guideposts for Designers

- Low-wing all-metal monoplane has the economic and safety edge over other types.
- Seat design and arrangement must permit occupants to survive 25G crash.
- Further study of exit locations, standardized and improved design of hinges, latches, etc., is needed.
- Proper marking of aircraft structure is desirable, so mechanics do not drill blind holes into vital equipment or wiring.
- Safety engineering set-up is a must within every aircraft engineering organization.
- Noise is lost energy. Efficiency gains, reduced prop tip speeds, reflective and absorptive baffles may ease this problem.
- Drag creators, such as external avionic equipment, deicer boots, etc., must be eliminated.
- Wide latitude of approach and climb-out speeds is needed to accommodate planes to maximum-traffic-frequency patterns at wide variety of airports and runways.
- Reverse-thrust-producing mechanism for jet aircraft is necessary.
- Collision prevention or warning means, whether lights, radar, cockpit indications and/or more precisely controlled flight paths, must be designed and improved for tomorrow's transports.

arrangements of equipment and functions indicated the need for radio operators and navigators. For those flights planned to exceed desirable or legal time limits, partial or total reserve crews are carried.

The crew number factor, of course, has shown a rising indication with the years, but determinations for the future should depend entirely on functional analysis of the over-all number of segregated jobs to be performed, and proper considerations of the relationship of flight time to the physical and mental fatigue of the tasks involved. Obviously, it is a prime duty of design and airline engineers to continuously simplify the tasks so that more can be accomplished with less total effort and with improved safety and efficiency.

▶ **Demand for Capacity**—The time curves of passenger seats, cargo and the total of all loads, show the accelerating upsweep of required capacities with time. This is interesting in its indication of the exponential growth of the industry. I think it is generally agreed that at any given time and under any given set of operating conditions, an operator would be wise to keep his airplanes a little on the small side of maximum required capacity.

A study and report prepared in 1930, using the sum total of available statistics from the extremely diversified American Airways operations of that time, indicated that with the then scattered demand and unreliability of operation, more than 90% of the business could have been accomplished with aircraft of less than half the average size of those then operated.

The indications led one of the most thoughtful and intelligent leaders of air transportation of that time to a conclusion that a 50% load factor was the most that air transportation could ever hope for. How untrue this was, has been demonstrated conclusively as air transportation achieved adequate utility and reliability. However, to contemplate that the very high load factors of today can be continuously maintained for future periods of possibly greater economic stringency, would appear to be on the side of recklessness.

This period has recently seen the development of the so-called coach or air tourist services—with somewhat reduced and simplified accommodations handling more passengers per airplane at lowered rates—made possible by the flexible nature of the equipment.

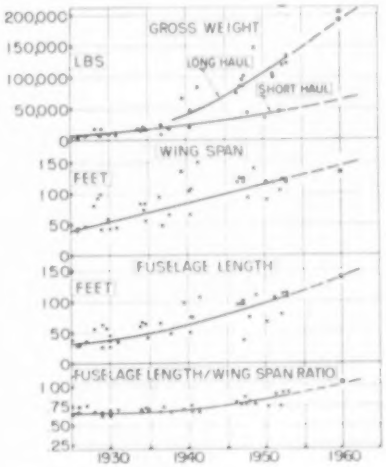

Fig. 1

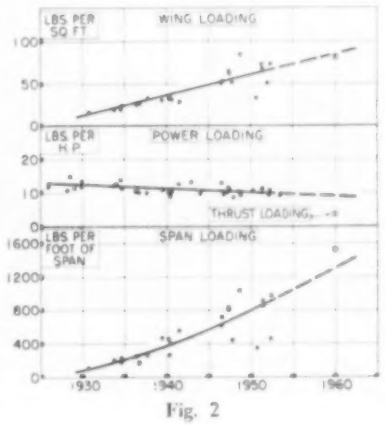

Fig. 2

▶ **Economic Factors**—With the relative inflexibility of the larger-size, high-performance transport units of the future, it would appear desirable to arrive at a basic determination of a satisfactory and fully acceptable standard of service, and to determine at what rate such services can be sold to develop the maximum economic possibilities of that type of airplane.

If there is economic justification for airplanes of such sizes and performances in a sufficient number of services, they will be built and successfully operated. If not, the industry would be well advised to move slowly into the high-performance possibilities of the future.

There is no reason to be pessimistic about the situation, for studies, to date, appear to establish that such airplanes can be developed in sizes fully consistent with anticipated capacity requirements, and that in such sizes they can operate at reasonable load factors and give the desired high performances with economic success.

Speed has many values, both direct and indirect, for which some compensation could be reasonably expected. To design these future aircraft, however, without taking full advantage of the economic possibilities and without planning the future growth programs of the aircraft, would be inexcusable in view of the tremendous risks in development and capital investment required.

The curves of wing loading, power loading and span loading (Fig. 2) with time show the principal reasons for continually improved economic weight factors, performances and efficiencies. Coincident with the developments of high-lift devices, the increased wing and span loadings and lowered power loadings have made possible the

For the
Aviation Industry

GEARS

of proven accuracy

PROVEN BY TEST

Accuracy lets aircraft gear users keep down gear size, weight. This means little gears, giant loads. But without proof that the accuracy is *really* there, this combination is an invitation to sudden failure. To *prove* gear accuracy, Sier-Bath *records it.* One type of recording, an involute tooth form chart, is shown here. It shows location and magnitude of errors to within 1/10,000 of an inch.

PROVEN BY USE

Small, light Sier-Bath Precision Gears are carrying heavy loads in today's major aircraft. For example, in the famous Bell Aircraft Corporation helicopters (illustrated above).

Sier-Bath PRECISION GEARS

***Sier-Bath* GEAR and PUMP CO., Inc.**
9262 Hudson Blvd., North Bergen, N. J.
Established 1905 Member A.G.M.A.
Also Manufacturers of
Screw and "Gearex" Rotary Pumps, and Flexible Gear Couplings

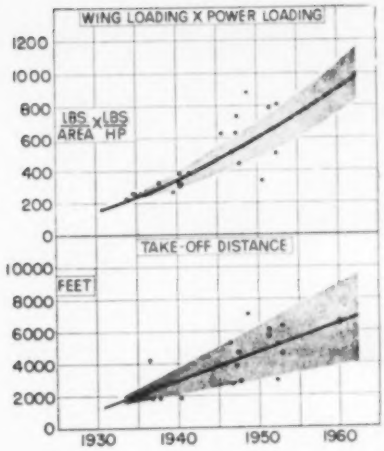

Fig. 3

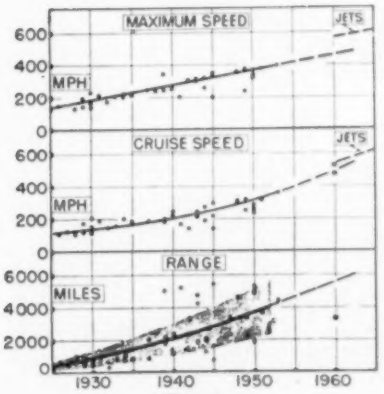

Fig. 4

economically efficient transports of today. The earlier removal of the arbitrary 80-mph. stall speed limitation cleared the path for achieving the benefits of these technical developments.

. . . The product of (Wing loading x Power loading) against time (Fig. 3) serves as a basis for the significant curve of Runway length requirement with time.

. . . The maximum speed increase has been almost constant with time since the beginning of powered flight (Fig. 4). It has been frequently pointed out that until the advent of the jet, maximum military speeds had increased at almost a flat rate of 14 mph. per year, while transport top speeds were going up at about half that rate. . . . Cruising speed increases have tended to increase a little more rapidly with time, primarily, I believe, due to the development of engine reliability and the ability to use higher percentages of cruising power.

The service ceiling scatter of points is naturally wide and merely shows an indication of the increasing altitude capacities of powerplants and the tendency toward lower power loadings with the higher wing loadings, and the incorporation of more adequate power

PERFORMANCE PLUS...

Roylyn

FILLER-UNIT Assemblies

Roylyn Filler-Unit Assemblies are available to meet every exacting requirement for airborne security and fast ground servicing.

The remarkable versatility of Roylyn Filler-Units is achieved by choosing your special combination of cap, dipstick, nipple and strainer. Filler-Units are supplied in sizes from ¼ inch to 6 inches and are available with pressure relief valves in the cap. Roylyn caps are compact, lightweight, vibration-proof and incorporate the famous "Quick-Locking" design that has proven to be a popular time-saving feature of Roylyn Couplings. Roylyn Filler-Units are adaptable to any type of installation.

FEATURES:

- LIGHTWEIGHT . . Roylyn Filler-Unit Assemblies are light-weight, and built for rough service!
- LARGE OPENING . . . The clear filler opening allows faster filling.
- STRAINER . . . Design provides for quickly removable strainer.
- QUICK-LOCK . . . Just a quarter-turn and it's locked!
- POSITIVE LOCK . . The Roylyn ball and cam lock is reliable insurance against leakage!

ROYLYN AIRCRAFT PRODUCTS

QUICK COUPLINGS
A complete range of types, sizes and materials for every requirement.

OXYGEN VALVES
Conform to and exceed all requirements of SPEC. MIL-V-5027.

HOSE-COUPLING ASSEMBLIES . . . Standard AN components are combined with either open or self-sealing Roylyn Quick Couplings.



1900 SERIES TUBE UNION . . . 30 to 60% weight saving with reduced installation and servicing time.

ROYLON RINGS
A Teflon ring with low friction, long life and higher operating efficiency.

SPECIAL VALVES
A typical example of specialized equipment is this Tank Pressure Regulating Valve.

Roylyn ROYLYN, INCORPORATED
1706 Standard Ave., Glendale 1, Calif.
QUICK COUPLINGS • VALVES & COUPLING VALVES
FILLER-UNIT ASSEMBLIES • TUBE UNIONS • WEB INSERTS • KINMONT POWER UNITS

Write for general Catalog WR-200

TOMORROW'S AIRCRAFT: *One step closer*

Advancing pushbutton aviation

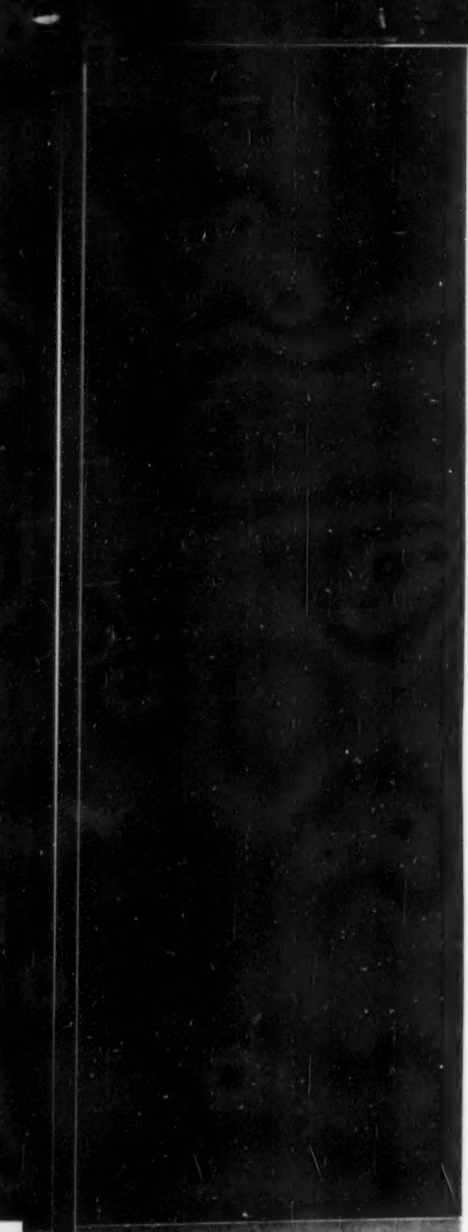

An impressive concentration of top aviation engineers and electronic specialists was recently assigned to the new Westinghouse Air Arm Division in Baltimore. The huge plant, occupying 75 acres next to the Baltimore Friendship Airport, has space to integrate all Westinghouse air-borne electronic engineering, testing and production facilities into one operation . . . with the opportunity for both air-borne and environmental testing.

Already this division has designed, tested and put into production some outstanding developments. One is the Westinghouse Autopilot, the first automatic pilot to utilize three "non-tumbling" gyroscopes and to provide unlimited maneuverability. Also of great value to our nation's military needs are the tremendous advances made on complete fire-control systems and guided missile systems.

These rapid strides were possible because of unmatched resources, such as: a Flight Engineering Department with hangar and company-owned planes . . . an REAC Analog Computer with flight simulator equipment . . . environmental test facilities, such as the one illustrated below . . . and a large staff of trained service engineers. All these Westinghouse facilities under one roof for one purpose—*advancing tomorrow's pushbutton aviation.* Westinghouse Electric Corporation, P. O. Box 868, Pittsburgh 30, Pennsylvania. J-91004

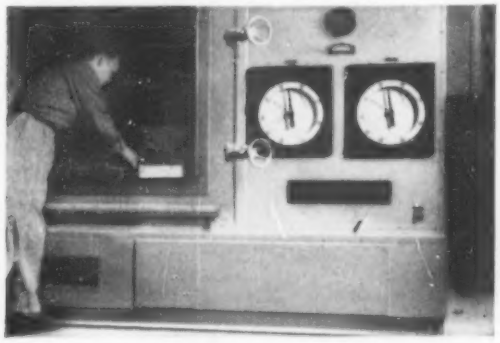

This Atmospheric Chamber simulates conditions from −65° to +160° centigrade, altitudes up to 80,000 feet. It also varies humidity 20 to 95 per cent and automatically controls these variable conditions to any pre-set values.

THE SCOPE OF WESTINGHOUSE IN AVIATION

Basic aircraft systems

Turbojet Engines, Fire Control, Radar, Autopilots, Communication Equipment and Electrical Systems.

Ground equipment

Wind Tunnels, Airport Lighting, Industrial Plant Apparatus.

Air-borne system components

Transformers, Rectifiers, Instruments, Gyro-motors, Temperature Control Panels, Generating Equipment and System Control, Circuit Breakers, Contactors, Motors, Actuators and Hoists, Electronic Tubes, Magamps*, Micarta*. *Trademark.

YOU CAN BE **SURE**...IF IT'S

Westinghouse

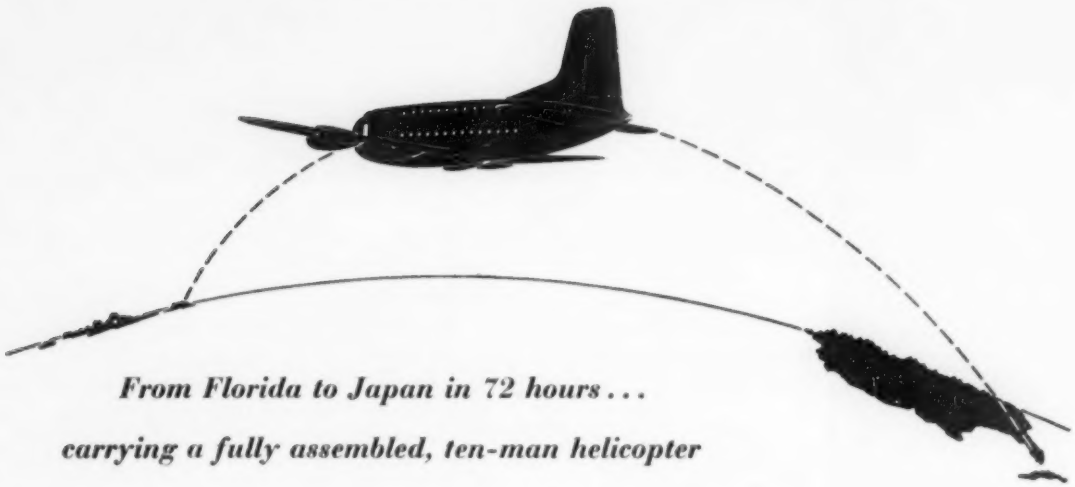

From Florida to Japan in 72 hours . . .

carrying a fully assembled, ten-man helicopter

—the DOUGLAS C-124 Globemaster

From the front lines in Korea last year came calls for a 10-man helicopter. The Air Force had some, but they were in Florida—9,000 miles away.

Normal air transport could make the *flight* in time, but tearing down a helicopter—reassembling it in Korea—would waste a week. So the Air Force turned to a Douglas C-124 Globemaster, the flying giant that covers thousands of miles nonstop with a 25-ton payload. Globemaster opened its clam-shell doors and swallowed the helicopter whole, took off, and reached Japan in 72 hours. Next day, at the Korean front, our men had the helicopter they needed.

Performance of the Globemaster in action is another example of Douglas leadership in aviation. *Faster and farther with a greater payload* is a basic of all Douglas design.

Depend on *DOUGLAS* **First in Aviation**

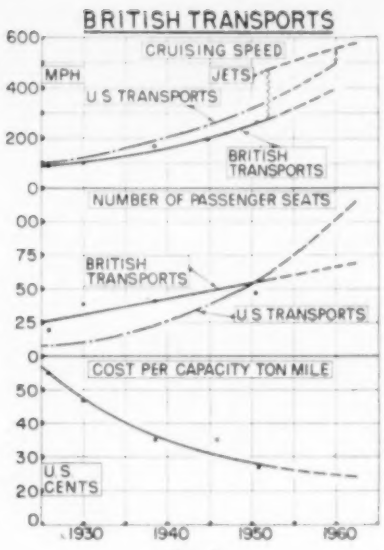

Fig. 5

performance reserves with time.

In the future, as increasing emphasis is laid on speed and since the speed must be attained at high altitude and by the use of relatively large powers or thrusts, service ceilings will, I am sure, continue to increase. . . .

▶ **Range Considerations**—Ranges are a function of the service pattern requirements of the operator and a measure of the ability of the design engineers to meet the desired figures. High aerodynamic efficiencies and low specific fuel consumptions are, of course, the basic requirements for maximum ranges. Both these factors have played an important part in the rising trend shown in Fig. 4 (p. 27).

There is, of course, for every airplane a minimum range below which its space capacity makes the airplane inefficient because it does not use its full weight ability. There is, also, at the other end of the scale, a maximum range where the combination of fuel and payload uses up all the weight capacity of the airplane and beyond which its economic efficiency deteriorates with extreme rapidity.

It is foolish to contemplate that this maximum range, as normally stated for a new airplane, is a realistic value. The inevitable service increases of empty weight—always a maximum in the early period of operation and happily decreasing with time—demand a sensible correction factor to determine the realistic maximum range for practical operation.

There is also a tendency on the part of design engineers to minimize the operational reserve fuel requirements and other essential factors which cut into range payload. The powerplant manufacturers have often been unduly optimistic with respect to the fuel consumptions to be realized in operation, which has a most significant bearing on range capacities.

In the past, there have also been significant variants with respect to realized speed performances due to a disregard of the drag penalties invoked by the necessary application of external antenna, radomes, de-icer boots and similar parasites. Most fortunately and with increasing urgency as speeds increase, much is being done to provide satisfactory antenna arrangements completely submerged within the contours of the airplane.

Many problems of satisfactory functional performance still remain, and new icing problems of unknown magnitude will be introduced. These include possible losses in transmission and receiving efficiencies, and may give beam distortion and problems of lightning strikes, which with non-conductive areas, give some reason for concern. Possible losses of structural strength in flush antenna areas may also aggravate problems of bird or hail strikes.

▶ **British Trends**—As an interesting comparison, I would like to show, at this time, a plot of British trends in transport operation for the past 25 years (Fig. 5), prepared from data taken from Mr. Peter Masefield's Brancker Memorial Lecture of 1951.

Cruising speeds in 1925 started at

External Wrenching Nut Retainers



Nutt-Shel

Manufacturers of self locking anchor nuts and bolt and nut retainers.

811 AIRWAY, GLENDALE, CALIFORNIA

CItrus 4-4191 CHapman 5-3693

Makes a high strength anchor nut out of the standard external wrenching nut. Standard anchor nut rivet hole spacing for attachment.

6600EW SERIES

Available in sizes for ¼" through ⅜" nuts. Cadmium plated carbon steel.

WRITE FOR SAMPLES

Write on your letterhead for samples and ENGINEERING MANUAL. Manual contains dimensions, tolerances and material specifications.

Announcing The CONTINENTAL O-470-A

...Powering
CESSNA'S NEW MODEL 180

High among the factors responsible for the splendid all-round performance of Cessna's new "Golden Year" Model 180 is its great new Continental engine. The O-470 series provides high output—225 h.p. at 2600 r.p.m. —plus an unusual combination of other essentials bearing on safety, dependability and economy of the aircraft as a whole. One of these is extreme compactness, permitting minimum envelope; another, a brand new concept of servicing and maintenance ease. Latest in a line long famed for advanced engineering (see below) this engine will unquestionably add to the prestige of Cessna planes, and of Continental aircraft power.



FRONT VIEW. Perforated unit at left is new integral oil cooler, eliminating external oil lines. Note also new prop flange.



REAR VIEW, showing belt-driven generator; also starter mounted at angle of 90 degrees to engine's main axis. Engine is exceedingly compact.

MODEL	No. Cyl.	Type	Displ.	H.P.
A65-8	4	H	171.0	65 @ 2300
C85-12	4	H	188.0	85 @ 2575
C90-8F	4	H	200.9	90 @ 2475
O-315-A	4	H	315.0	130 @ 2500
C145-2	6	H	301.3	145 @ 2700
R185	6	H	471.0	185 @ 2300
R225-8	6	H	471.0	225 @ 2630
O-470-A	6	H	471.0	225 @ 2600
W670-23	7	R	667.8	240 @ 2200

ONLY CONTINENTAL BACKS YOU WITH ESTABLISHED WORLD-WIDE SERVICE

Continental Motors Corporation
Aircraft Engine Division
MUSKEGON, MICHIGAN

about the same value—100 mph. or slightly below—but by 1952, American cruising speeds were well above 300 mph. with 360 mph. promised for 1953, while the British with conventional engines have stayed at a conservative 260 mph. with an indicated projection to 275 mph. or thereabouts by 1953.

It would appear that in the past the British have not been nearly as interested in speed as have we Americans, which seems natural in consideration of the shorter BEA cruising distances involved. The benefits to be achieved in block speed made good are so much a function of range that speed greatly loses its significance in the shorter range operations. Mr. Masefield pointed out that while London-Paris (about 200 miles) cruising speeds had increased some 225% in 20 years, only about 35% increase in station-to-station effective speed was realized.

This consideration must be kept prominently in mind by local operators evaluating the questionable benefits of substantial speed increases in short-range operations. Of course, in 1952 the British have made a cruising speed jump to some 450 mph. or better by the introduction of the Comet jet operations, and will proceed to do much better in the future as larger powerplants are applied.

The BEA curve of average transport passenger seat capacities is also interesting in comparison with the American trend. Starting with very nearly the same values in 1925, the British capacities rose very rapidly and then flattened off by 1952 to an average maximum of some 47 seats, while the American curve has increased at an accelerated rate to a comparable average of about 65 in 1952.

The cost curve of British operation has had a very healthy downswing through the years, although it is difficult to attribute too much significance to the absolute values since the numerous reorganizations and somewhat uncertain conditions with respect to subsidies have made determinations of cost rather indefinite.

The same may well be said of the determinations of American costs in the past, which have been greatly confused by ill-defined and variable accounting systems, and by considerable uncertainty as to the nature of rewards in the subsidy and compensatory classes. . . .

► **Around-the-Clock Study**—In 1938 when American Airlines was operating DC-3s for all types of service—long, medium and short, to the extent of their range capacities—we made quite well distributed use of the airplanes with the most airplanes in the air during the daylight hours of maximum traffic consumption—namely, late afternoon. . . . In 1946, we had a sub-

BARBER COLMAN

PERMANENT-MAGNET MOTORS

NEW...

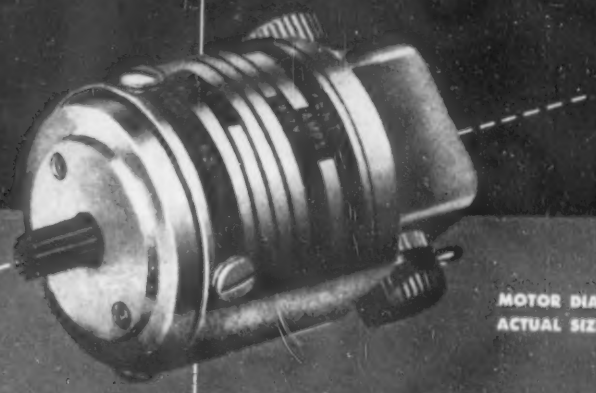

MOTOR DIAMETER ACTUAL SIZE, 1½"

WITH COMPLETELY

Symmetrical

ARMATURE WINDING

Completely symmetrical armature winding . . . the most outstanding motor development in years.

NEW ARMATURE DESIGN

- True electrical balance.
- 25% higher efficiency.
- Superior commutation.
- Extremely low radio noise interference.

CHARACTERISTICS OF BYLM 40001 MOTOR

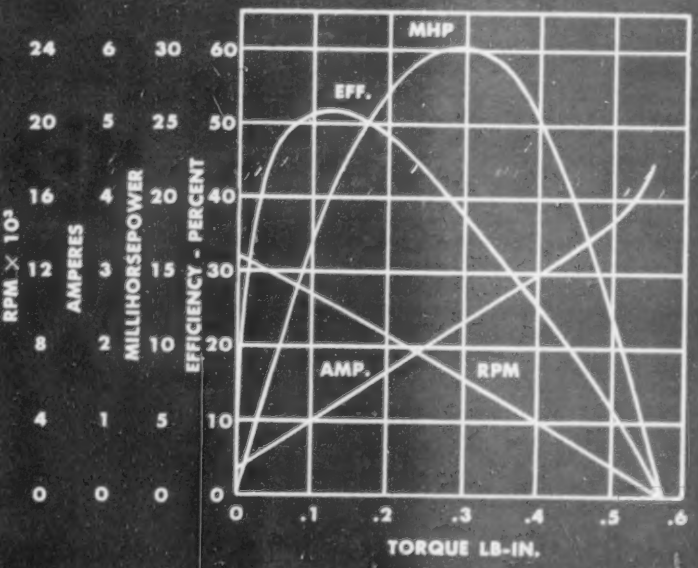

SPECIFICATIONS

Specifications of BYLM 40001 motor:

Maximum output	30 millihorsepower
Rated output	20 millihorsepower
Voltage	28 volts d-c
Current at rated output	1.2 amperes
Speed at rated output	10,300 rpm
Duty cycle (based on rated output and 200° F. ambient)	3 minutes on, 7 minutes off
Moment of inertia	0.22×10^{-3} lb. in.²
Weight	7.25 ounces

BARBER-COLMAN PERMANENT-MAGNET MOTORS

Withstand Sudden Reversals
Magnet stabilization eliminates demagnetizing effect common to most p-m motors when reversed suddenly at full speed.

Have Powerful Dynamic Braking
Elementary control circuits short armature terminals for dynamic braking. A full stop from 10,000 rpm in about 10 revolutions.

Tapered Air Gap
For improved commutation — normally available only in larger motors.

Meet Military Specifications
Radio interference suppression to USAF7214 or MIL-I-6181 up to 150mc, available on all motors. Suppression to higher frequencies on request. Conforms to all performance, environmental, vibration, and shock requirements of AN-M-10a and AN-M-46.

VERSATILE DESIGN
Write for Bulletin F4344 to see versatility of design and adaptations.

Barber-Colman Company

BARBER COLMAN

1252 ROCK STREET • ROCKFORD, ILLINOIS

sps aircraft fasteners

UNBRAKO

STANDARD "SIX-DIGIT" ENGINE BOLTS

All listed diameters —hex and internal wrenching types. AN specifications.

NAS SHEAR BOLTS

Close tolerance, high strength, flush head type.

NAS INTERNAL WRENCHING LOCK NUTS

Superior safety nuts. Sizes from ¼" to 1½".

NAS INTERNAL WRENCHING AIRCRAFT BOLTS

Latest NAS specifications. Threads are fully formed by rolling after heat treatment.

INFORMATION UPON REQUEST. ADDRESS DEPARTMENT 678.

FLEXLOC

FLEXLOC SELF-LOCKING NUTS, REGULAR TYPE

Both stop and lock nuts. One piece construction, resilient segments lock positively with uniform torque. Aircraft approval, sizes # 4 to 1¼" inclusive. Regular steel FLEXLOC approved for temperatures to 550°F.

FLEXLOC SELF-LOCKING NUTS, THIN TYPE

Less than regular height, yet conform to accepted standards. Every thread, including the locking threads, carries its share of load. Have all regular FLEXLOC features, but save weight and height. Aircraft approval, # 6 to 1¼".

FLEXLOC EXTERNAL WRENCHING NUTS

Incorporate famous FLEXLOC self-locking principle and one-piece, all-metal construction. Latest NAS specifications. Sizes from ¼" to 1½" NF Thread Series. Approved for temperatures to 550°F.

INFORMATION ABOUT FLEXLOC ON REQUEST. ADDRESS DEPARTMENT 51,

AIRCRAFT PRODUCTS DIVISION

STANDARD PRESSED STEEL CO., JENKINTOWN 3, PENNSYLVANIA

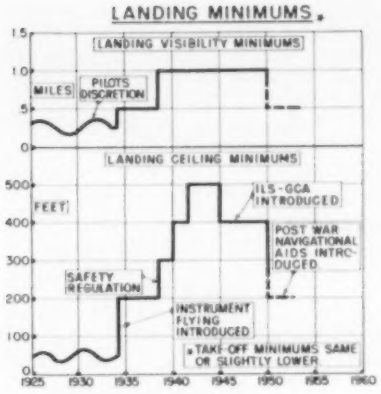

Fig. 6

stantially greater fleet composed of DC-3s and DC-4s. The average range of operation had gone up by the inclusion of the larger DC-4 airplanes, but we still showed the same maximum activity throughout daylight hours, somewhat leveled off during this period with a substantial relative decline during the very early morning hours.

Now, if you will look at the present American Airlines' fleet of 78 Convairs and 66 DC-6s, you will note that the type of operation has been segregated into essentially long-range operations for the DC-6s and short-range for the Convairs. The DC-6 curve, by this specialized application, has very substantially leveled out throughout the entire 24 hours—a most efficient utilization of equipment in that respect, and probably one of the very substantial reason why DC-6 costs per unit mile show such a favorable value.

On the other hand, the Convair, assigned primarily to short ranges of operation in local services, has a very high utilization throughout the daylight hours, but falls to very low values and even to zero for one time in the early morning hours. The fleet required to perform the daylight services is, obviously, large, but an equal number of airplanes are sitting on the ground unused for a portion of the night. This is one of the factors which contributes greatly to the apparently high unit operating costs of the short-range units of such a fleet. . . .

You may also be interested in a correlation between landing minimums and time (Fig. 6) affected throughout the period by numerous influences and fortunately showing marked and continuous improvement since 1945. This is one of the essential factors in the ambitious objective of some day achieving 100% operating factor. It is, I think, a pretty good confirmation of my earlier statement, that as a type of vehicle the airplane will eventually accommodate itself better to adverse weather conditions than any other type of transportation.

. . . Take a glance at the interesting increases in airline engine overhaul times from 1939 to date. If we were to project this curve further back, we would find a starting very close to 100 hours per overhaul in 1930. This experience should not be dissimilar to that which will in the future probably be achieved by jet and turboprop powerplants. It is a history—the progressive improvement of engineering design, materials, testing and operating techniques which have always accompanied the development of powerplants. There seems no reason for a change in principle in the future. Let us be reasonably optimistic. . . .

► **Uniform Product**—With the tremendously diversified background which we have been discussing, it seems strange that we have come to this point in air transportation with an almost firmly established type of aircraft and with startling similarities between powerplants, cockpits and installations of all kinds.

The reasons for this, of course, include the concentration of basic information in nationally available laboratories, notably the NACA; and the centralization of procurement in the Navy and the Air Force—the two largest customers for aviation development projects; and the establishment of uni-

Microtomic

the drawing pencil that holds up under pressure

Smoothness . . . absolute uniformity . . . deep print clarity – you can virtually *feel* them in Eberhard Faber's new Microtomic drawing pencil. And – under today's pressure in the drafting room, few things are more important in a pencil.

Representing the finest in Eberhard Faber research and development of drawing pencils, the Microtomic will stand the most rigid drafting room comparison. Order some – test them – today.

Only Microtomic gives you all these features

HI-DENSITY LEAD
Lines are opaque to actinic rays of high speed 'printers'.

ABSOLUTELY UNIFORM
Every Microtomic of the same degree marking is identical.

NEW DUSK GRAY
Scores of professional men acclaimed it the best color for a drawing pencil.

BULL'S-EYE DEGREE MARKING
Easier to read . . . quicker to find – positive identification.

ALSO – Choice of Holders and Microtomic Drawing Leads in all degrees.

EBERHARD FABER

TRADEMARKS REG. U. S. PAT. OFF.

since 1849

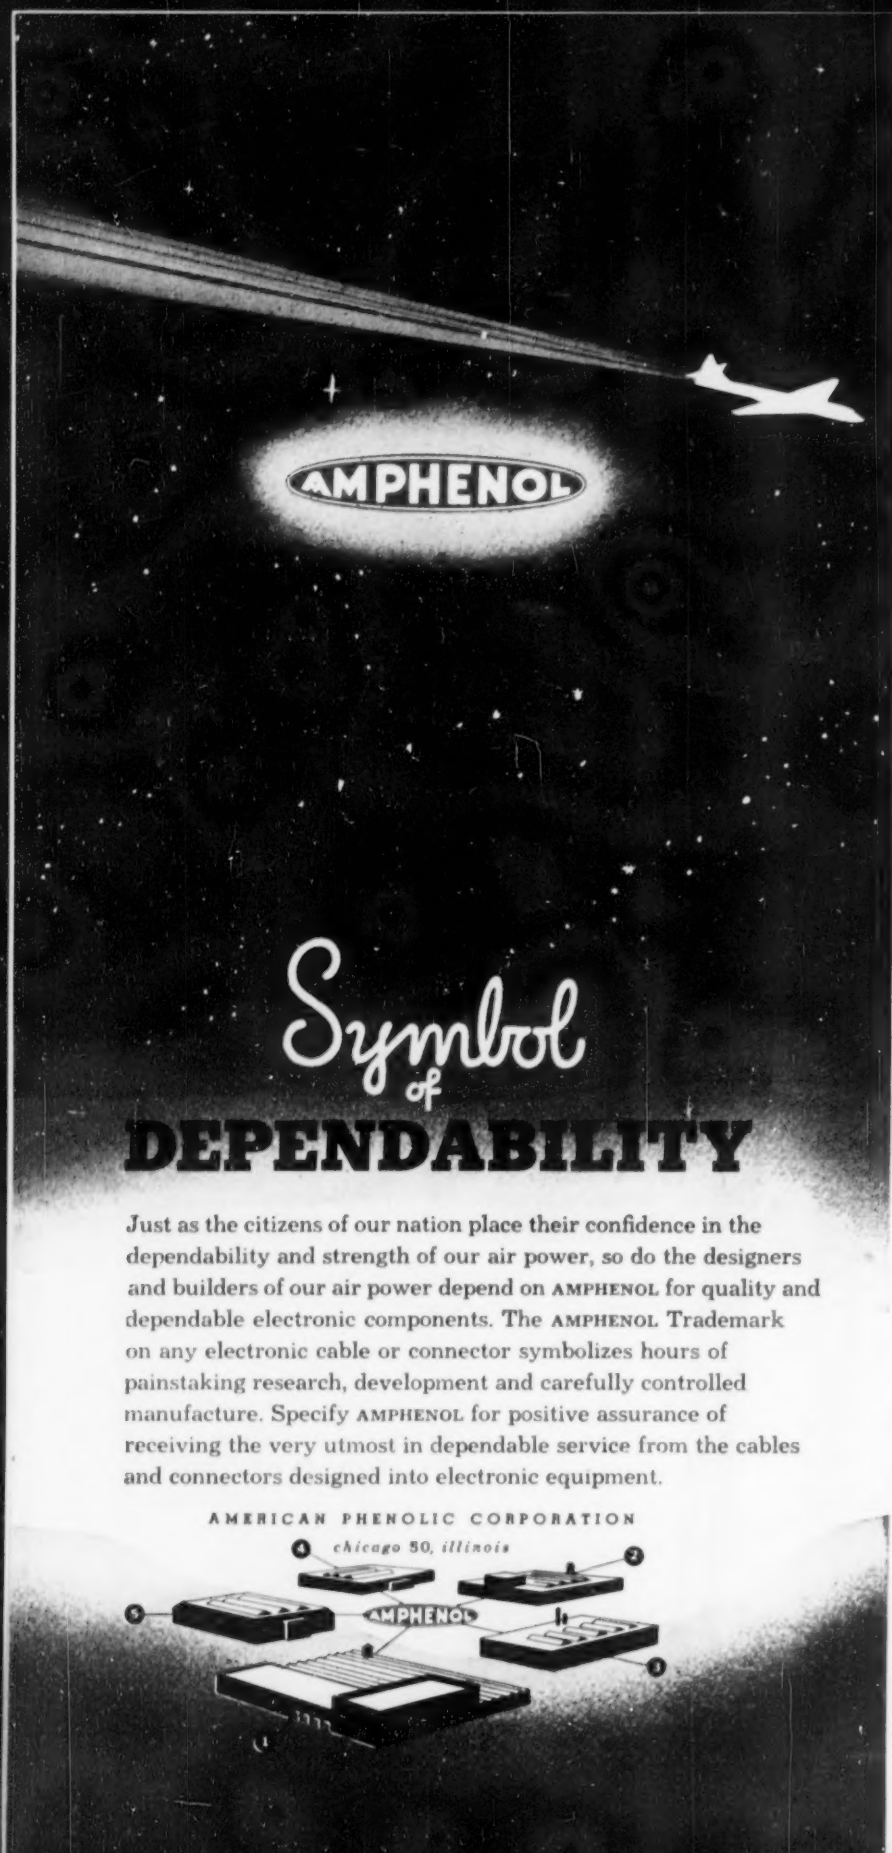
AMPHENOL
Symbol of
DEPENDABILITY
Just as the citizens of our nation place their confidence in the dependability and strength of our air power, so do the designers and builders of our air power depend on AMPHENOL for quality and dependable electronic components. The AMPHENOL Trademark on any electronic cable or connector symbolizes hours of painstaking research, development and carefully controlled manufacture. Specify AMPHENOL for positive assurance of receiving the very utmost in dependable service from the cables and connectors designed into electronic equipment.
AMERICAN PHENOLIC CORPORATION
chicago 50, illinois
AMPHENOL

form regulations and supervision for the design, construction, testing and operation of commercial aircraft under the CAA and the CAB.

Within these influences, there has been a very substantial latitude of development, but they have contributed greatly to the bringing about of a fairly uniform air transport product. I would mention modestly that airline engineers have, to some extent, played a part in the same program in determining and emphasizing the important technical needs of their industry.

▶ **Today's Transport**—There are, of course, substantial variations in size, speed, range, number and rating of powerplants, weight and space capacities and many other features, but if we were to define the modern American air transport, it does not appear to be dissimilar from many of the good transports developed and used abroad alongside of the American products.

- It would be a low-wing, all-metal, internally braced, smooth stressed-skin structure with two or four conventional engines driving constant-speed, full-feathering, reversible propellers.
- It would be fitted with retractable tricycle landing gear with various numbers of wheels and brakes dependent on the size of the airplane.
- The streamlined engine housings or nacelles would in flight effect complete closure over the retracted main wheels.
- The airplane would have slotted flaps, and the ailerons and tail control surfaces would probably be tab-trimmed or controlled and would be metal-covered.
- The cockpit would be fitted for a minimum crew of two, with at least one more for the large four-engine types, would contain somewhat standardized communication, navigation and control equipment of many types.
- For the medium and longer ranges, the entire fuselage would be pressurized; tended by a suitable cabin crew, and fitted with comfortable reclining seats, lavatories and suitable food accommodations.
- The airplane, powerplants and propellers, etc., would be fitted with ice protection, generally of the heat type.

Numerous details, quite standardized in nature, could be appended to this list, but the above would describe, in general terms, any and all of the current brood of operating transport airplanes.

▶ **Much to be Done**—But with all this indicated standardization and excellence, there remains much to be accomplished in the engineering field, in addition to the pleasant contemplation of such fundamental changes as those to turboprop or turboject types, and greatly enhanced performance characteristics.

I sincerely hope the future holds no

It takes a tough, heat-resistant bolt to withstand the temperatures of modern jet engines. Today, The H. M. Harper Company is manufacturing bolts, nuts, and other fastenings of the modern high temperature alloys such as Discaloy, Refractaloy, A-286, and special grades of stainless steel. If you require fastenings designed to withstand high temperatures, corrosion, excessive wear, or other extreme conditions, Harper engineers and metallurgists will gladly assist you.

For over a quarter of a century, The H. M. Harper Company has specialized in the manufacture of corrosion-resistant fastenings in brass, naval bronze, silicon bronze, monel, aluminum, and all stainless steels, and is today America's largest producer of such fastenings.

THE H. M. HARPER COMPANY
AERO DIVISION
8225 Lehigh Avenue, Morton Grove, Ill.

Specialists in High Temperature Fastenings of—

Refractaloy
A-286
Inconel
Discaloy
Hastelloy
19-9-DL
Greek Ascaloy
Titanium
Stainless Steel

threat of change in basic type from the essentially low-wing, all-metal monoplane. Innumerable studies have been made, and from time to time proposals offered suggesting high-wing transport designs . . . but their value does not begin to balance against the safety and economic advantages of the low-wing type.

Every thoroughly honest, comparative study with which I am familiar has shown some weight advantage in favor of the low wing, primarily because of the shortened landing gear and the elimination of keel and supplementary structure necessary to achieve the minimum required strength forward.

But, the irrefutable advantage of low-wing design lies in the area of safety. . . . The disposition of live load, if we may refer so casually to our passengers, between the mass concentration of engine, wing and fuel weight and the probable point of impact with the ground in the event of a crash landing, is almost certain to result in aggravated casualties. . . .

▶ **Impact Protection**—It is apparent that one of the best ways to absorb the energy of impact is to permit the destruction of structure. How much better it is to have that structure, not the fuselage in which the passengers are housed, but rather the wings and engine installations. One only needs to recall the repeated experiences of the war to emphasize this and the great difficulty, if not impossibility, of executing satisfactory ditching operations with a high-wing type of airplane.

May I, therefore, repeat my sincere hope that this great step forward in safety be recognized as an established trend, and no retreat from it be made.

Another most significant factor in crash survival is the engineering of proper arrangement and detail with respect to the passenger- and crew-occupied areas. A great deal of work has been done in this field to determine the nature of the loads and their significance with respect to personal injury. It does not seem too ambitious to expect that a well-designed and fitted airplane would readily permit its human occupants to survive a 25G crash, probably more than can normally be taken in other forms of vehicles without serious injury or death.

It seems to me that the basic approach to the problem should be from the point of view of the capacity of the human body to endure stress when properly supported, without serious injury or death.

Investigation has shown that distributed stress has permitted up to 100G in numerous cases of accidental or suicidal falls without fatality. Innumerable tests have been conducted of properly supported subjects at 30 to 40G decelerations without injury. These, then, should be ultimate design objectives for safety in aviation crashes.

The basic nature of aircraft structure is such that by its very destruction, substantial impact energy can be absorbed. With reasonable energy-absorbing seat mountings, chair structures and seat belts, and the elimination of extraneous hazards which result from personal impacts against hard or sharp objects, or damage from flying missiles, it is not difficult to see many ways in which aircraft crash safety can be made superior to any other.

It seems appropriate to comment that static strength requirements of chairs, even with a recognition of the need for strength tests of varying amounts in all directions, could be met by an airplane chair designed and built of a brittle material such as glass. The inappropriateness of such action hardly needs comment, but the inadequacy of the requirements as an expression of the needs to meet the impact loading anticipated, is evident.

A reasonable deflection of seat structure under severe impact load must be permitted. On the other hand, to develop serious distortion, or display inadequate retention to the basic airplane structure will result in a very unsafe cabin condition due to the interferences with emergency evacuation. These haz-

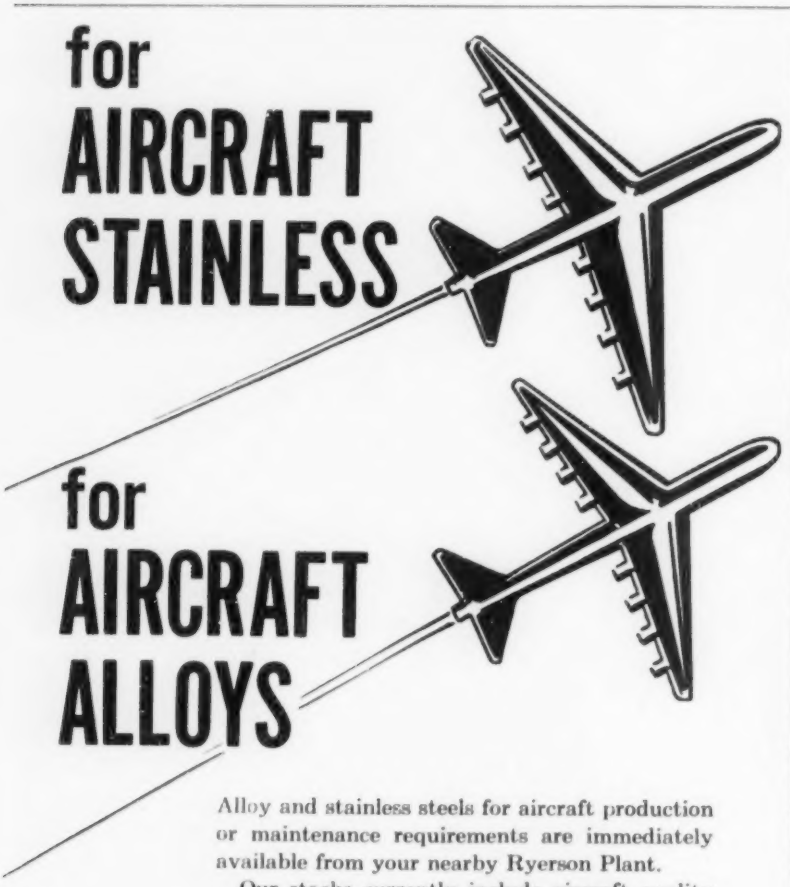

Alloy and stainless steels for aircraft production or maintenance requirements are immediately available from your nearby Ryerson Plant.

Our stocks currently include aircraft quality bars, sheets and strip in over 400 sizes, finishes and conditions. Also more than 300 types, shapes and sizes of aircraft quality stainless. So for quick steel shipment—aircraft or standard analysis . . .

Call RYERSON

JOSEPH T. RYERSON & SON, INC. PLANTS AT NEW YORK • BOSTON • PHILADELPHIA CINCINNATI • CLEVELAND • DETROIT • PITTSBURGH • BUFFALO • CHICAGO MILWAUKEE • ST. LOUIS • LOS ANGELES • SAN FRANCISCO • SPOKANE • SEATTLE

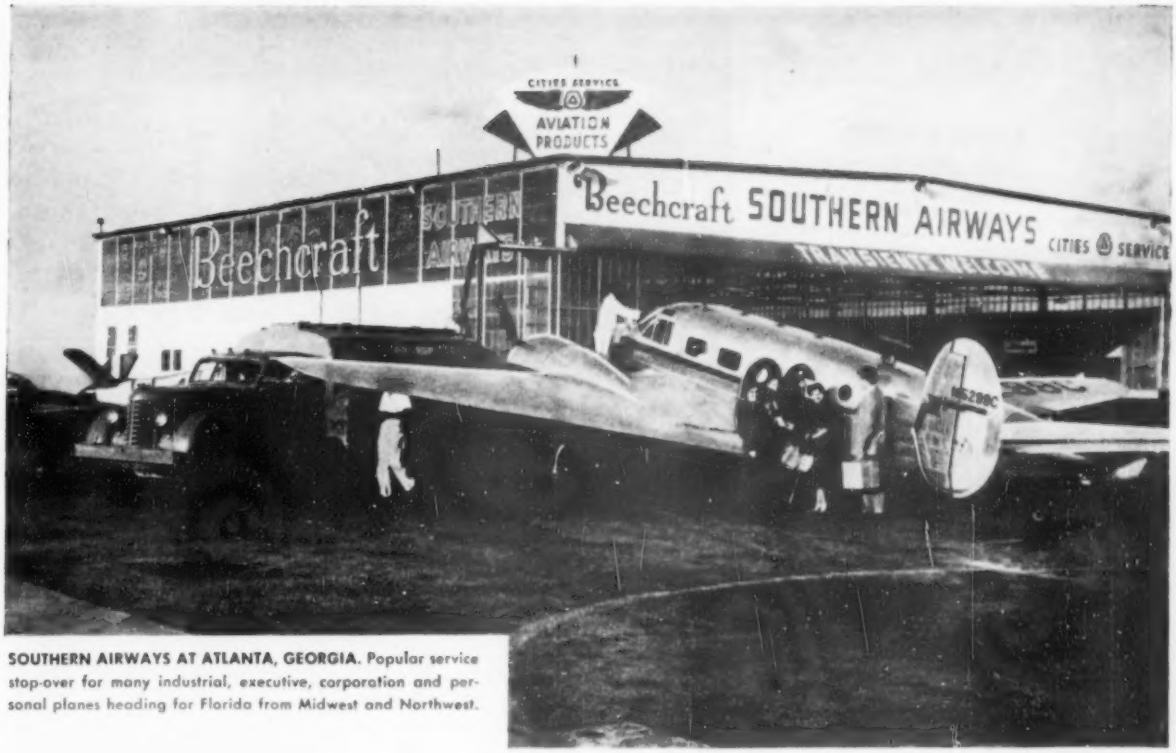

SOUTHERN AIRWAYS AT ATLANTA, GEORGIA. Popular service stop-over for many industrial, executive, corporation and personal planes heading for Florida from Midwest and Northwest.

Popular, Dependable Service-Point For Many Florida-Bound Aircraft

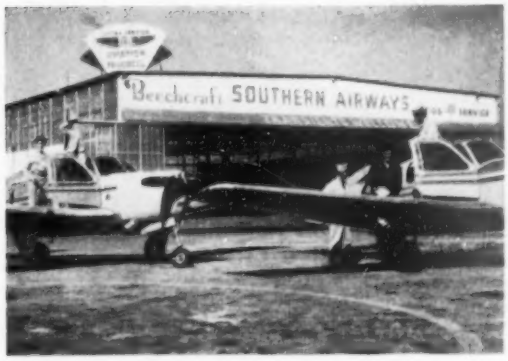

ARMY FIELD FORCES SCHOOL at Southern Airways, Atlanta, teaches instrument flight training to Army Aviators of 3rd Army, Fort McPherson, Georgia.

Southern Airways at Atlanta And Birmingham Services More Businessmen's Aircraft Than Any Other Fixed Base Operation In Southeast! . . . With Cities Service Aviation Products!

Here's another spot on the airmap of America where a top-flight aircraft service organization relies on the consistent high quality and ultra-dependability of Cities Service Aviation Products.

Southern Airways service facilities include Radio Shops and approved CAA Repair Stations. They are also the leading distributors in dollar volume of Beech Aircraft and parts.

Wherever you fly through the Southeast, make Southern Airways your service stop. You'll always be assured of the highest quality service with America's finest Aviation Products . . . the complete line of Cities Service Aviation Products.

CITIES SERVICE
AVIATION PRODUCTS

Pressure Processing

. . . whoever uses it in their production is a customer or potential customer of **H-P-M**

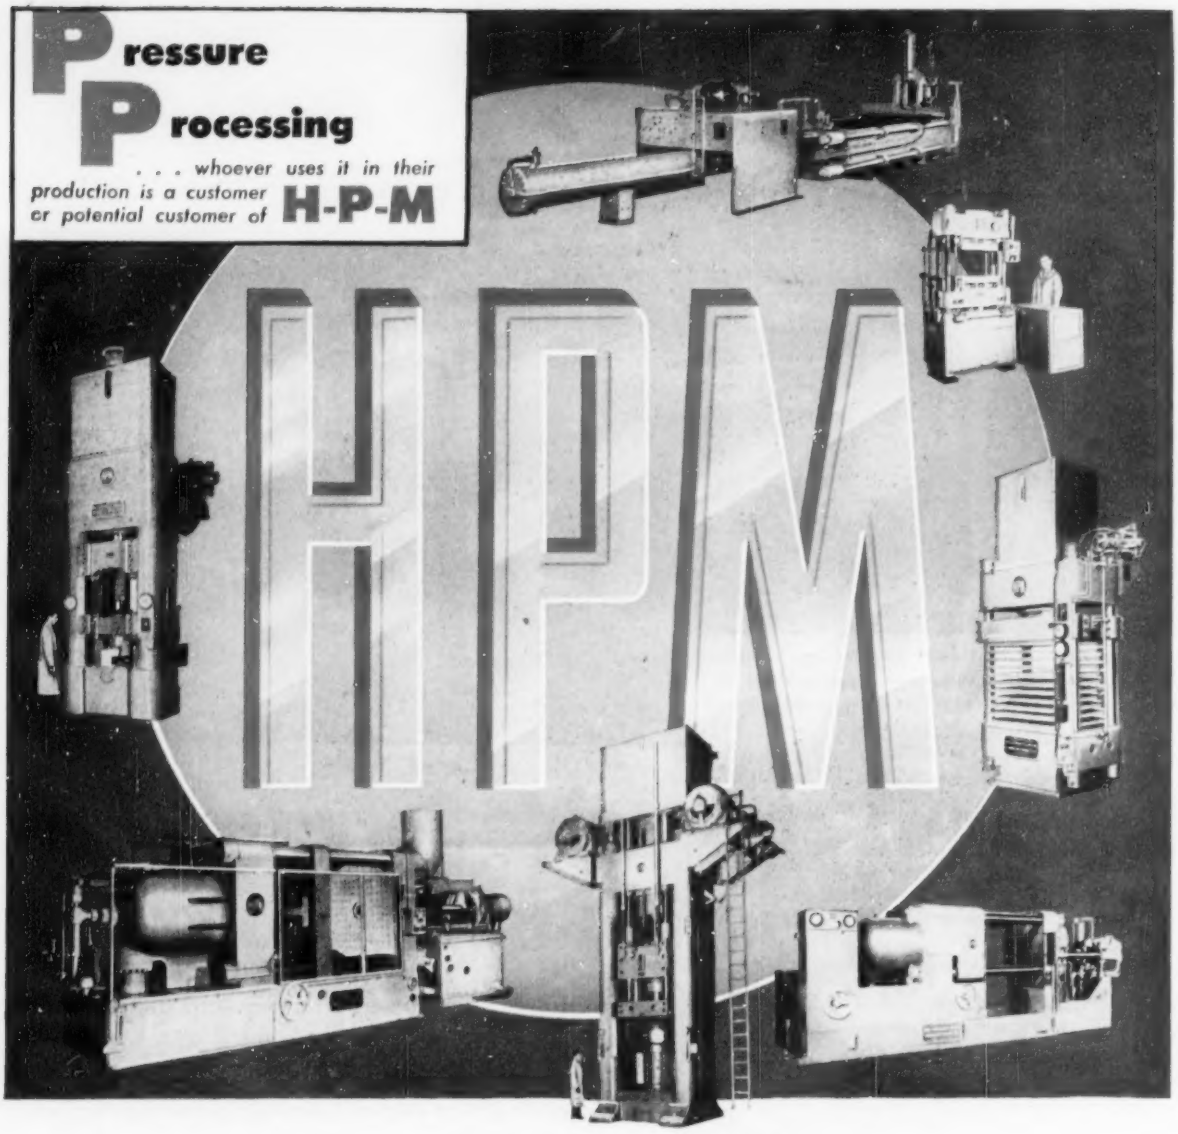

For EVERY Pressure Processing Need

• Practically every one of these H-P-Ms is directly or indirectly doing a job for the aircraft industry. Yes, Metalworking . . . Die Casting . . . Rayon Steeping . . . Laminating . . . and Plastics Injection, Compression and Transfer Molding are just a few modern production jobs in which H-P-M All-Hydraulic presses play a big part.

Why not talk shop with an H-P-M engineer. Perhaps he can save you real money. Write today!

HPM

THE HYDRAULIC PRESS MFG. CO.

1902 Marion Road, Mount Gilead, Ohio, U.S.A.

Presses for Every Pressure Processing Application

ards are recognized and methods of solution have been proposed. There does not seem to be much reason why suitable engineering action should not be taken.

► **Doors and Exits**—Another most significant aspect of passenger cabin safety is that associated with the provisions for ingress and egress—most important in event of emergency. Undue emphasis, by regulation, on the aft location of major emergency exits does not appear to be a suitable recognition of the overall picture. A very insufficient amount of statistical data does not justify a conclusion, contradicted by actual experiences, that airplanes always terminate crash landings facing forward. Actually, they end up with their axes at all angles with the line of initial impact from zero to 180 degrees.

The substantial evidence to that effect seems to emphasize the essentiality of treating the airplane, right and left, and fore and aft, with due regard to required locations of standard and emergency exits. It is the writer's strong opinion that the normal entry door or doors to the cabin rate many times the value of any other exit in emergency, because of familiarity as to location and use. It is true that the aft end of the fuselage is often the least damaged in a crash, but this is not so to an extent that justifies an abnormal or exclusive emphasis on that location for emergency exit purposes.

It is also unfortunate that consideration of emergency exit locations has placed undue emphasis on the forward inertia and pressure ejection of fuel from ruptured tanks. With the variable final position of the aircraft axis as one factor, the existence of reasonably strong prevailing winds may completely nullify the effects of any forward jettisoning action of the fuel. Even if the airplane proceeds in a straight line as the fuel spills from the ruptured tanks, the nose of the airplane frequently passes over and beyond any fuel, which may end up under the rear of the fuselage, or on either side.

The plea, then, is for a complete adequacy and universality of treatment in this respect.

I would also like to open the strong case for standardized and improved locations, designs, directions of openings and hinging, and types of latches, handles and operating instructions for passenger doors of all descriptions. In my opinion, this factor is as fundamental to evacuation safety as any other consideration. . . .

► **Thoughtless Designing**—Engineering thinking must also recognize the impossibility of service mechanics, no matter how intelligent, coping adequately with the unknown. It cannot be assumed that a service mechanic always has at his elbow a maintenance manual, even

AN3350-1 Leach No. 7064-238 SPST Contacts rated 50 Amps Resistive, Inductive and Motor Load @ 29 VDC. Continuous duty coil. Weight—.54 lbs.
AN3350-2 Leach No. 7064-758 Same as AN3350-1 except has inverted terminals and base mounting.
AN3370-1 Leach No. 7264-283 SPST Contacts rated 200 Amps Resistive and Motor and 100 Amps Inductive Load @ 29 VDC. Continuous duty coil. Weight—1.225 lbs.
AN3370-2 Leach No. 7264-570 Same as 3370-1 except has inverted terminals and base mounting.
AN3371-1 Leach No. 7264-332 SPST Contacts rated 200 Amps Resistive and Motor Load and 100 Amps Inductive @ 29 VDC Intermittent duty coil. Weight 1.225 lbs.
AN3371-2 Leach No. 7264-570-1 Same as AN3371-1 except has inverted terminals and base mounting.
AN3380-1 Leach No. 7401-C SPST Contacts rated 400 Amps Resistive and Motor Load and 100 Amps Inductive Load @ 29 VDC. Continuous duty coil. Weight 2.5 lbs.
AN3380-2 Leach No. 7401-CBU Same as AN3380-1 except has inverted terminals and base mounting.
AN3381-1 Leach No. 7401-I SPST Contacts rated 400 Amps Resistive and Motor and 100 Amps Inductive Load @ 29 VDC. Intermittent duty coil. Weight 2.5 lbs.
AN3381-2 Leach No. 7401-IBU Same as AN3381-1 except has inverted terminals and base mounting.
Leach
A-N APPROVED
HEAVY DUTY
CONTACTORS
for Aircraft
Illustrated above are but a few of the complete line of Leach AN approved heavy duty contactors for aircraft. Leach Relay Company can provide the aviation industry a wide selection of relays that not only meet, but surpass, the most stringent AN, AF and NAF requirements. If you have a difficult relay problem, an application where ordinary relays just won't do, it will pay you to contact Leach. For dependable performance, there's an unsurpassed Leach relay for every use in every type of aircraft.
FOR BETTER CONTROLS THROUGH BETTER RELAYS —CONTACT LEACH
LEACH RELAY CO.
5915 AVALON BOULEVARD, LOS ANGELES 3, CALIFORNIA
Representatives in Principal Cities of U. S. and Canada

GUADALCANAL 1942-43
RABAUL 1943
TARAWA 1943
KWAJALEIN 1944
ENIWETOK 1944
GUAM 1944
SAIPAN 1944
PHILIPPINES 1944
IWO JIMA 1945
OKINAWA 1945
TOKYO 1945
KOREA 1950-?

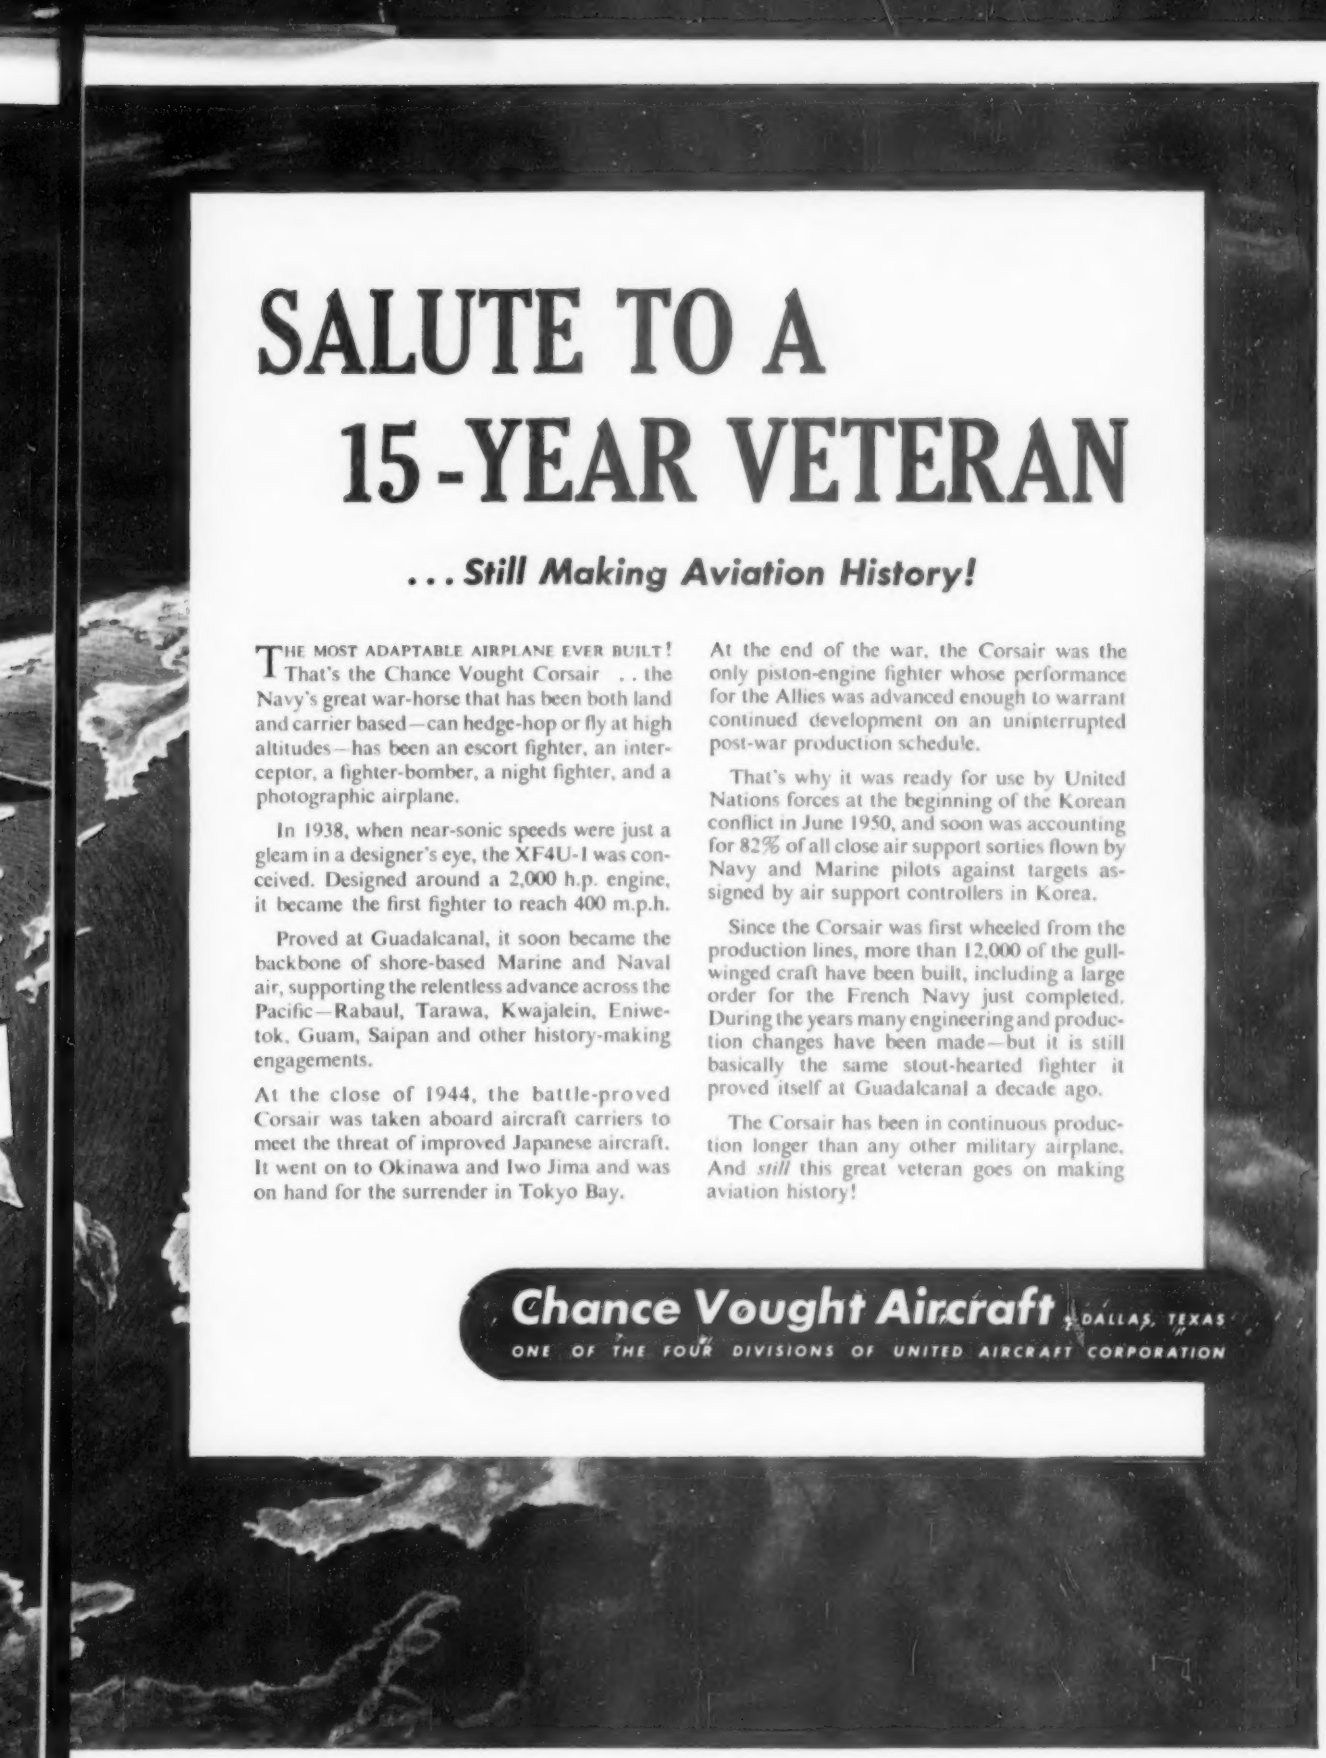

SALUTE TO A 15-YEAR VETERAN

... Still Making Aviation History!

THE MOST ADAPTABLE AIRPLANE EVER BUILT! That's the Chance Vought Corsair . . the Navy's great war-horse that has been both land and carrier based—can hedge-hop or fly at high altitudes—has been an escort fighter, an interceptor, a fighter-bomber, a night fighter, and a photographic airplane.

In 1938, when near-sonic speeds were just a gleam in a designer's eye, the XF4U-1 was conceived. Designed around a 2,000 h.p. engine, it became the first fighter to reach 400 m.p.h.

Proved at Guadalcanal, it soon became the backbone of shore-based Marine and Naval air, supporting the relentless advance across the Pacific—Rabaul, Tarawa, Kwajalein, Eniwetok, Guam, Saipan and other history-making engagements.

At the close of 1944, the battle-proved Corsair was taken aboard aircraft carriers to meet the threat of improved Japanese aircraft. It went on to Okinawa and Iwo Jima and was on hand for the surrender in Tokyo Bay.

At the end of the war, the Corsair was the only piston-engine fighter whose performance for the Allies was advanced enough to warrant continued development on an uninterrupted post-war production schedule.

That's why it was ready for use by United Nations forces at the beginning of the Korean conflict in June 1950, and soon was accounting for 82% of all close air support sorties flown by Navy and Marine pilots against targets assigned by air support controllers in Korea.

Since the Corsair was first wheeled from the production lines, more than 12,000 of the gull-winged craft have been built, including a large order for the French Navy just completed. During the years many engineering and production changes have been made—but it is still basically the same stout-hearted fighter it proved itself at Guadalcanal a decade ago.

The Corsair has been in continuous production longer than any other military airplane. And *still* this great veteran goes on making aviation history!

Chance Vought Aircraft DALLAS, TEXAS

ONE OF THE FOUR DIVISIONS OF UNITED AIRCRAFT CORPORATION

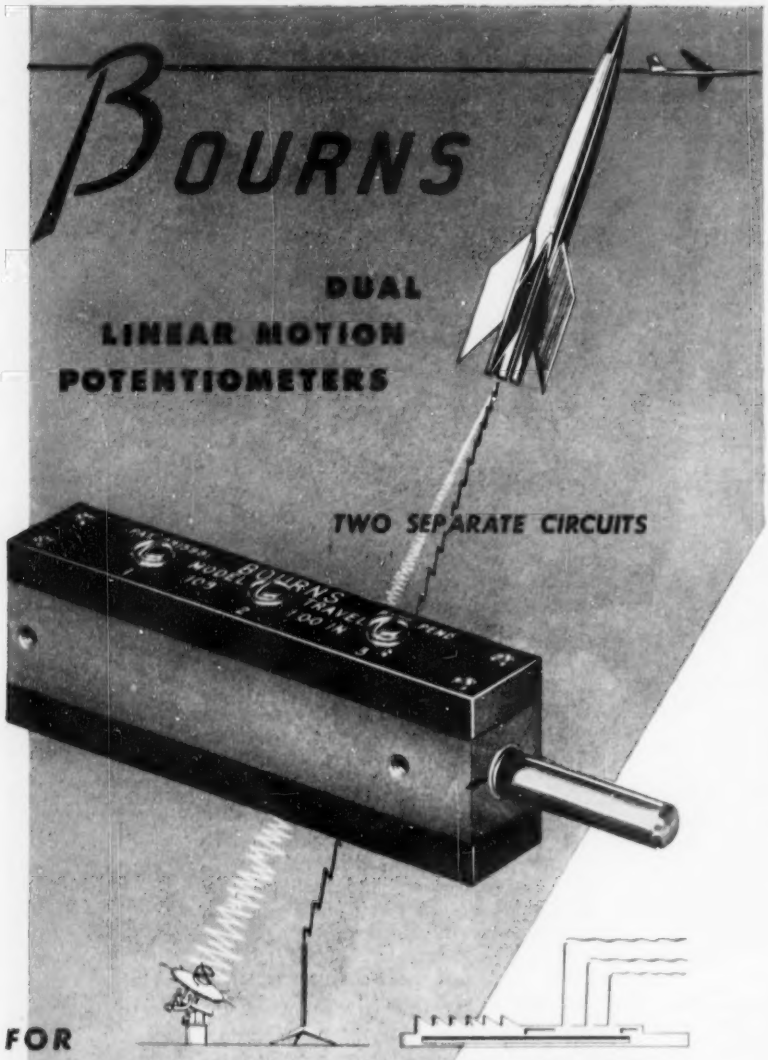

Designed for precise instrumentation in automatic control circuits for aircraft, guided missiles and general industry, BOURNS linear motion potentiometers accurately translate mechanical position or movement into two independent signals . . . one signal often used for feed-back control and the other for telemetering.

This dual instrument possesses all the advantages of two single potentiometers and in addition, saves space, weight and installation time. With this wire-wound potentiometer a resolution of .001 inch is obtainable in standard ranges from 1 to 6 inches.

BOURNS designs and manufactures other potentiometer instruments which measure gage pressure, differential pressure, altitude and acceleration.

BOURNS LABORATORIES
6135 Magnolia Avenue, Riverside, California
Technical Bulletin on request, Dept. 59

if it were complete in all details, nor does he have the time, nor inclination, to look up every subject which may be remotely related to his particular problem.

There have been many instances of mechanics unwittingly drilling through a blind floor or bulkhead into a congested mass of unprotected electrical cables or conduit. A little forethought would indicate that the airplane should be marked in such a way that, without reference to a manual, the mechanic would know that behind any critical location on a floor or bulkhead there were items of equipment or installations which made it inadvisable, at least, to drill through. This type of advance engineering thinking is the only guaranteed preventive of innumerable accidents and mishaps.

All too often, details of thoughtless design or installation engineering are discovered as the causes of incidents and accidents, both minor and serious—sometimes inadequate designs which you would expect to find in a child's toy rather than in a million-dollar product like a transport airplane: Hinge pins that fall out, latches that become inoperative and unlatch, leading-edge covers that hinge on the wrong side and come dangerously loose in flight; and in the less dangerous but equally annoying and expensive area: Faucets that will not shut off, outboard drains that freeze, valves and controls that lock from low temperatures, equipment items that come loose in turbulence and make dangerous missiles. . . .

▶ **Safety Engineering**—This leads directly to a thought I would like to express concerning the place and importance of safety engineering in an aircraft engineering organization. Some feel that safety is of such universal concern that its principles should be taught and inculcated in all aircraft engineers—and that is all. Others feel that safety should be a separate engineering function responsible to a rather high executive in the organization—something like Inspection, or to a lesser degree Weight Control. I think both are of the utmost importance.

There is no equivalent to continuously conceived and originally built-in safety design features. But, recognizing the effects of continuously present pressures which are adverse to a quiet and thorough contemplation of safety in design, there is also no substitute for a constructively critical review of all design from the safety expert's point of view. We have not done it adequately—let's do it!

▶ **Jets and Turboprops**—Now assuming that we have defined our modern transport type and by imaginative, analytical engineering have improved its quality, let us examine a few of the problems which face the next series of high-per-

YOU WOULDN'T KNOW AN ENGINE WAS RUNNING 300 FEET AWAY FROM THIS RAM JET STAND

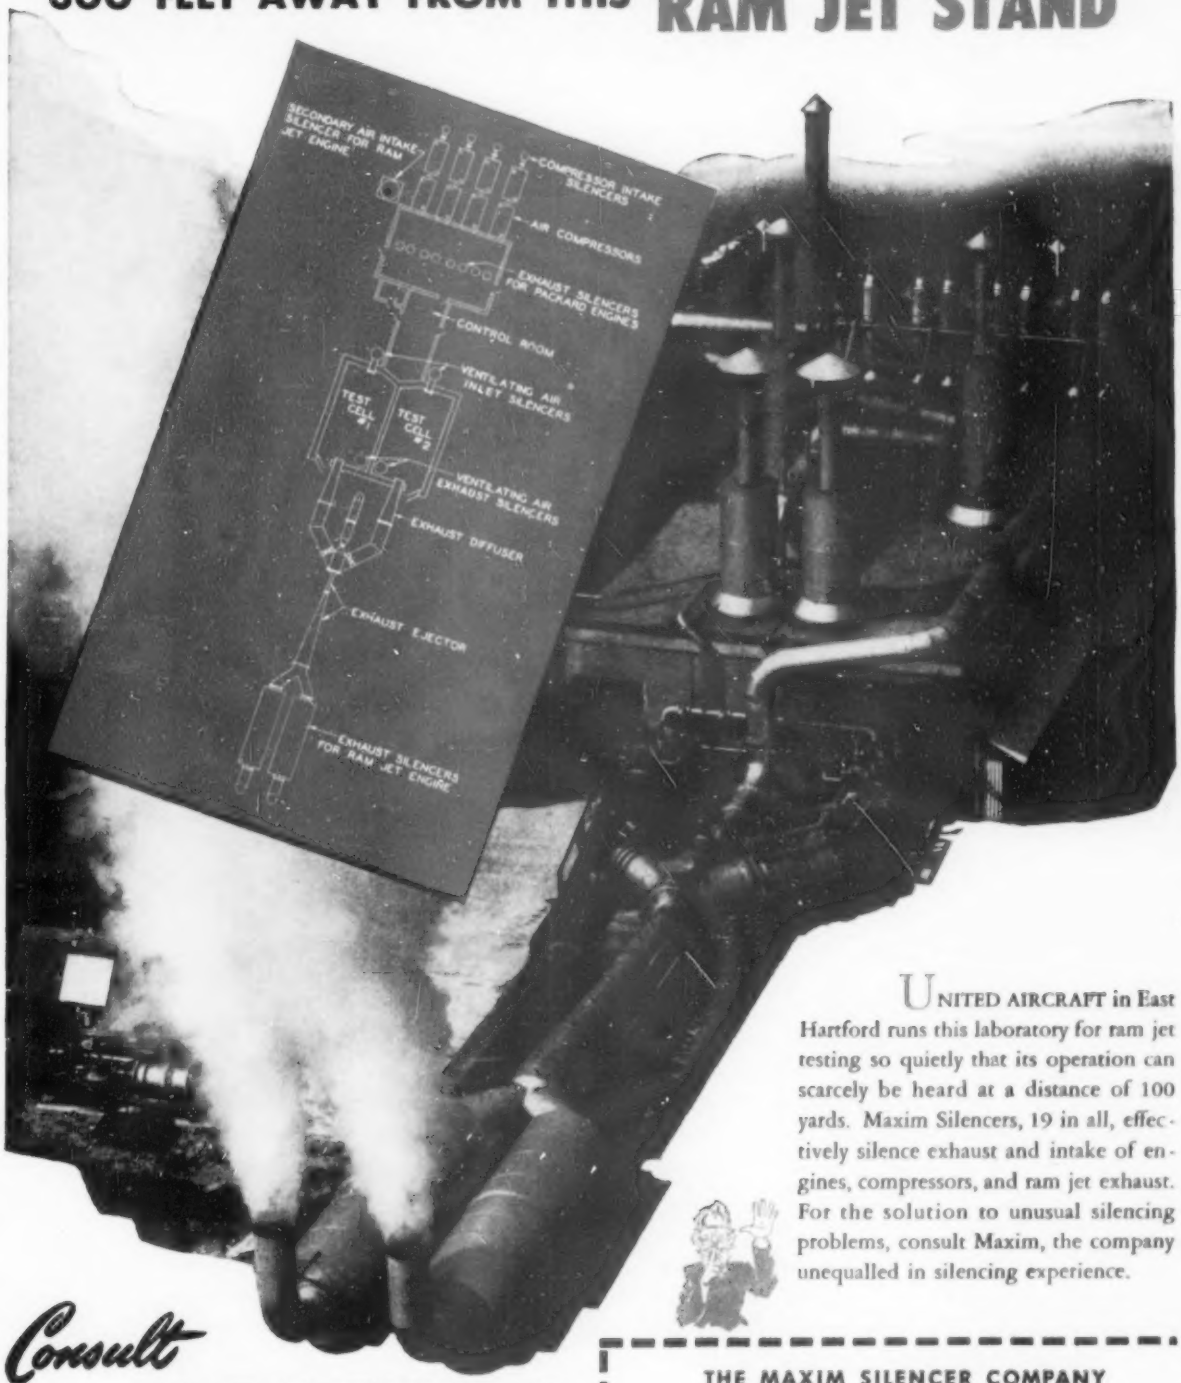

UNITED AIRCRAFT in East Hartford runs this laboratory for ram jet testing so quietly that its operation can scarcely be heard at a distance of 100 yards. Maxim Silencers, 19 in all, effectively silence exhaust and intake of engines, compressors, and ram jet exhaust. For the solution to unusual silencing problems, consult Maxim, the company unequalled in silencing experience.

Consult

MAXIM

THE MAXIM SILENCER COMPANY
115 HOMESTEAD AVE., HARTFORD 1, CONN.

Gentlemen: Please send me more information on jet engine silencing.

NAME _____

COMPANY _____

ADDRESS _____

_____

8MX58

MICRO switches are the "eyes"

NAVY F7U-3 CUTLASS TO

SWOOPING DOWN to land on the carrier deck, there is no "guesswork" for the pilot of Chance Vought's Cutlass as to whether his landing gear is down . . . he knows. Up or down, the position of his landing gear is unfailingly signalled to the cockpit by MICRO precision switches.

Small size, light weight and *absolute dependability* of these precise snap-action switches dictated their selection for this and other important functions by Chance Vought's design engineers.

These factors, plus the ability of MICRO engineering to supply the widely varying switch characteristics to meet exacting aircraft requirements, have made MICRO switches first choice in the industry for components to protect both planes and pilots and enhance aircraft performance.

MICRO units are daily meeting the utmost requirements of both commercial and military aircraft not only as landing gear limits and signals but also as: screw jack limits, wing fold limits, flap limits, cockpit lighting controls, fire control masking, door interlocks, fire-fighting apparatus, barometric pressure devices, wing lock indicators, throttle warnings, propeller controls . . . and other uses.

This wide experience in serving the rapidly expanding needs of the aircraft industry has made MICRO a headquarters for switch engineering cooperation, consultation and development. MICRO field engineers are located near you. We invite you to contact your nearest MICRO branch office.

for pilots FOR CHANCE VOUGHT'S "SEE" LANDING GEAR POSITION

Is the landing gear up?

This is one of the MICRO "LA" Series landing gear uplock switches which signals the pilot when landing gear is retracted.

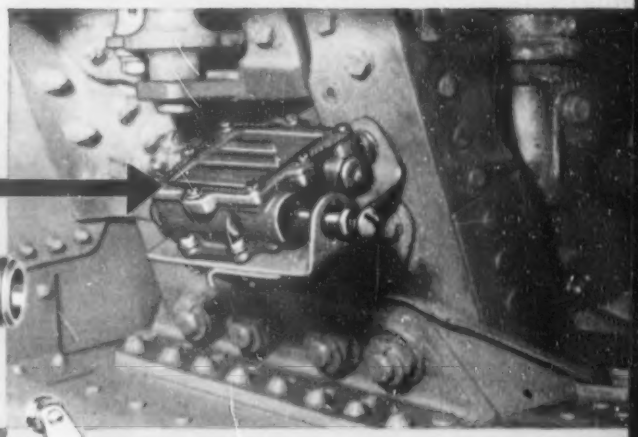

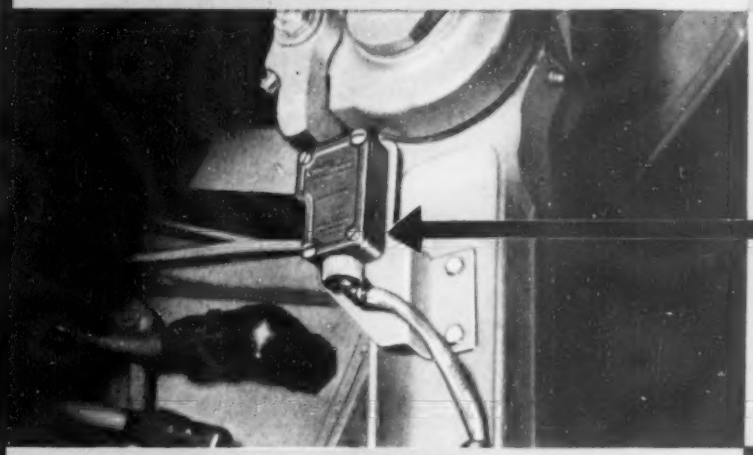

Is the landing gear down and locked?

This is one of the MICRO "VA" Series down lock switches which signals the pilot when the landing gear is extended and locked in position.

Is accidental retraction impossible?

This is one of the MICRO "LMR" Series main gear strut extensions which prohibits accidental retraction of the landing gear while ship is sitting on ground or carrier.

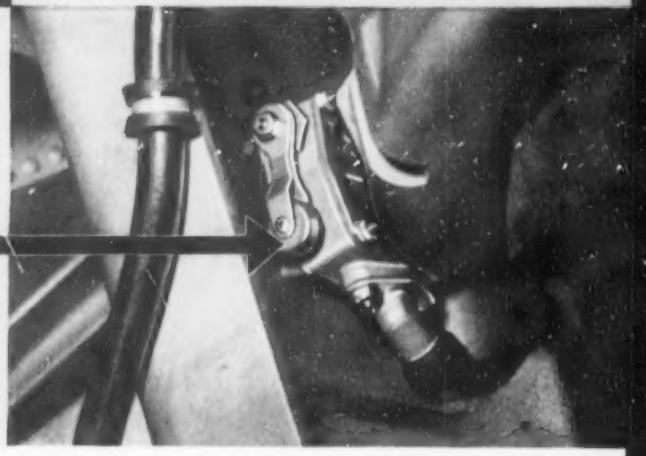

MICRO

MAKERS OF PRECISION SWITCHES

FREEPORT, ILLINOIS

A DIVISION OF

MINNEAPOLIS-HONEYWELL REGULATOR COMPANY

HERE'S GOOD NEWS!

NEW TVOR

- increases plane let-down safety for any airfield
- changes "fair-weather" to all weather airline service
- permits marginal weather landings by private and executive aircraft.

AT LESS THAN *one fourth the cost of* VOR!

TVOR single unit installation needs only an inexpensive shelter on the field.

New terminal VHF omnidirectional radio range adds safe instrument approach facilities to any airport. CAA approved. Installs directly on the airfield. Includes field detector, antenna and instaliation test equipment. *And is available on 90 day delivery.*

TVOR radiates 50 watts of power, ample for most installations. It uses the same quality components and gets the same tests as CAA equipment. Installation operates almost entirely without attention. Any plane with standard VOR instrumentation can make precision approaches to a TVOR equipped field.

TVOR builds air traffic by extending service through marginal weather . . . increases airline passenger service by eliminating flights lost due to rain and fog . . . brings corporation aircraft to their home field in poor visibility.

TVOR commercial transmitters are the same as these designed and built for the CAA.

Flight test TVOR with your own plane at the College Park Airfield. Convince yourself that your group cannot afford to be without low cost, high quality TVOR.

TVOR changes fair-weather to all weather airline service.

TVOR guides corporation aircraft to their home fields, in spite of low ceilings.

TVOR works with standard instrumentation. Private planes "home" on their own airfield.

MARYLAND ELECTRONIC MANUFACTURING CORPORATION
COLLEGE PARK 34, MARYLAND

formance aircraft when they come into being. It does not seem improper to conclude that the industry would prefer to tread on the firmer ground of relatively conservative increases in performance and size, not achievable in the larger transports with any reciprocating engines which are planned or likely, but certainly attainable with many advantages by the use of proper size and efficient turbo-propeller type powerplants when available. However, it is obvious that there are many technical problems in such a satisfactory development, even beyond those incidental to the early satisfactory operation of jets.

The great emphasis which the military program has placed on jet development will unquestionably bring that simpler type of powerplant to an adequately satisfactory and reliable condition long before we can hope to have turbo-propeller operations.

There appears to be in the American domestic picture a bracket of required ranges—roughly from 500 to 2,500 miles—and appropriate sizes of well-developed jets to give a reasonable and efficient transport airplane of quite high performance and satisfactory economy. Below these bracketed ranges and above them, there would still appear to be an eventual great need for the application of turbo-propeller powerplants.

From the point of view of any airline, even the largest, it is obviously undesirable to operate any more models of aircraft than are necessary to perform the required services. The smaller airlines may well hope to continue to do all their work with one model. However, in the domestic industry as a whole, and particularly among the larger airlines, it seems that a minimum of two models will be required, continuing the trends of the indicated split in developmental types and characteristics which originated some 15 years ago in America with the concept of the DC-4E.

▶ **Copter Problems**—Encroaching on the absolute minimum of aviation ranges, the helicopter will eventually find its economical niche. It is my opinion, however, that the inherent mechanical complexity of this type of flying machine, despite its apparently desirable characteristics for short-range operation in congested areas, and its basic principle which requires such a large proportion of its power for sustaining it in flight, will continue to make the units very expensive in first cost, relatively expensive in operating costs per unit mile, and fraught with problems of dependability.

Furthermore, if they are to be operated in the congested areas proposed, we must not forget that they are just as dependent on powerplant reliability as an airplane, and have many unsolved problems of stability and controllability.

Only WESTERN flies
NEW 4-ENGINE DC-6B's
on every deluxe flight!

...and only WESTERN gives you
4-ENGINE SERVICE ON EVERY FLIGHT
—deluxe and coach—
to Portland and Seattle-Tacoma!

WESTERN'S DC-6B IS THE NEWEST, BIGGEST, FASTEST MODEL OF THE WORLD-FAMOUS DOUGLAS DC-6

WESTERN
AIR LINES
AMERICA'S OLDEST
FLIES AMERICA'S NEWEST

Earl F. Slick
uses the
Scott AVIOX
For COMFORT and PROFIT

A handsome luggage case holds complete oxygen breathing equipment for **FOUR** air travelers.

Slick Airways' DC-6A Airfreighter in front of Burbank, California terminal.

Earl F. Slick's Lockheed Lodestar.

Flying at altitudes above 10,000 feet is fast and economical and no one knows this better than Earl Slick, Chairman of the Board of Slick Airways, Inc. Mr. Slick flies up to one hundred thousand miles a year and insists on comfort for himself and business associates who fly with him. That's why he carries a handsome new SCOTT AVIOX. "I do not feel at my best above ten to twelve thousand feet and the SCOTT AVIOX helps me a lot, both from a comfort and practical business standpoint," writes Mr. Slick. "It's tremendously useful in my Lodestar."

In a handsomely appointed case of fine leather, the AVIOX assures comfortable oxygen breathing for up to four passengers. It's portable. Take it with you wherever you go. Ideal for the flying executive.

Write for full details on how the SCOTT AVIOX can make your high altitude flights more comfortable.

The Scott AVIOX comes complete with SCOTT disposable masks.

• Scott also manufactures a complete line of fixed and portable Oxygen Breathing Equipment for a wide variety of aviation uses. Ask or write for Catalog #H-33-C.

AVIOX by Scott

Scott
AIR SAFETY—OUR SERVICE

SCOTT AVIATION CORP.
275 ERIE STREET LANCASTER, N. Y.
Designers and manufacturers of aircraft equipment since 1932, including oxygen equipment, hydraulic equipment, tail wheel assemblies and miscellaneous engineered accessories.

particularly under instrument conditions. The single-engine, single-pilot transport airplane went out of vogue many years ago, and we must question the safety factors of such a helicopter operation. Any evidence to the contrary is based on a very limited operational experience.

Yet, we blithely accept the idea that helicopters can safely operate over congested, built-up areas. There is nothing in the above to disparage the usefulness or eventual promise of the helicopter as a lifting and carrying device, but it must be properly applied just as must the airplane.

► **DC-3 Successor**—There is much discussion in the local operations field concerning the specifications for a desirable and efficient small transport airplane, which will presumably improve vastly on the economy of the DC-3. . . . It might be expected to operate with a little less field requirement, and might be expected to have somewhat better single-engine performance and reserve. It might have somewhat better flying qualities. It would need little, if any, more in the way of speed or altitude performance to accomplish its intended purposes, but it must do all these things and be much more economic per unit-mile.

The approach appears to be a suggested increase in capacity, which with a constant assumed load factor, indicates at the same or slightly decreased costs per airplane-mile, greatly decreased costs per unit-mile. The fallacy of this appears to be in the assumption that local operators can establish and maintain a high load factor. The engineering economic study I made for American Airways in 1930 emphasized the startling conclusion that about 90% of our then business could have been accomplished with airplanes less than half the size were were operating.

There does not seem to be too much difference in many of the characteristics of local operations today and tomorrow compared with the scattered operations of American Airways in 1930, and if that comparison be in any sense legitimate, it would seem to emphasize that the cost per airplane-mile is a much more important factor than cost per unit load-mile achieved by increased size and the possibly excess capacity.

It would be interesting to consider the results that might be obtained if it were physically possible to expand the width of a DC-3 airplane the necessary foot or so required to provide it with a satisfactory additional row of seats raising its capacity from some 24 to 32. The changes, if efficiently accomplished and accompanied by some supplementary cleaning up of the airplane as a whole would, I am sure, have a relatively small effect on the perform-

20th Annual "Inventory of Air Power" COMING MARCH 2nd

No. 1 Aviation Advertising Opportunity of 1953

This is the established Yearbook of Aeronautical Business. More aviation men will read this issue . . . more aviation suppliers will advertise in this issue . . . than in any aviation magazine of the year. As a manufacturer, it offers you a prime medium for informing the entire industry, civil and military, of your products and services. Note below the resume of major subjects to be included in this report by the editors of AVIATION WEEK.

MILITARY AVIATION – On-the-spot reports from Korea by AVIATION WEEK'S correspondent will provide a picture of Military Aviation in action. This section includes design requirement data, information on the current program and production progress.

GUIDED MISSILES – The great progress that has been made in this rapidly developing Aviation Field by the Industry and Air Force will be reported in detail. Approved information will also be incorporated in special first hand reports by AVIATION WEEK Editors.

PRODUCTION FOR AIR POWER – World requirements and commitments plus the growing program of the U. S. Air Force indicate the huge production task now being fulfilled by our Manufacturing Industry. The Inventory Number will analyze our production picture.

AVIONICS FOR AIR POWER – With Avionics furnishing the brains, the eyes and ears of today's Military Air Force, this constantly developing 100 percent Aeronautical Market will come in for special attention in the "Inventory of Air Power" issue.

NORTH ATLANTIC AIR POWER – The NATO build-up in terms of Air Power imposes additional and heavy loads upon our productive capacity. McGraw-Hill correspondents in the key cities of these nations will report and interpret each nation's requirements.

RESEARCH – What is the Research budget? What are the chief areas of Research? What is the trend of expenditures? What new facilities are needed? The 1953 "Inventory of Air Power" issue will examine Aeronautical Research and report on these questions.

COMMERCIAL TRANSPORTATION – The vast, ever-growing Transport Industry which is fast changing the traveling habits of the world's people will be given a special section for detailed analysis. The latest information and statistics will be a part of this section.

Write or wire your advertising reservation today

McGraw-Hill Publishing Company, 330 West 42 St., New York 36, N.Y.

Other Advertising Sales Offices:

Atlanta 3, Ga., 1321 Rhodes-Haverty Bldg.; Boston 16, Mass., 350 Park Square Bldg.; Chicago 11, Ill., 520 N. Michigan Ave.; Cleveland 15, Ohio, 1510 Hanna Bldg.; Dallas 1, Tex., First National Bank Bldg.; Detroit 26, Mich., 856 Penobscot Bldg.; Los Angeles 17, Calif., 1111 Wilshire Blvd.; Pittsburgh 22, Pa., 738-9 Oliver Bldg.; Philadelphia 3, Pa., 17th and Sansom Sts.; San Francisco 4, Calif., 68 Post Street; St. Louis 8, Mo., Continental Bldg.; London, E.C. 4, England, 95 Farringdon St.

Member ABC • ABP

AVIATION WEEK

A McGRAW-HILL PUBLICATION

LOOK TO THE SKY FOR YOUR MARKET

TWA Selects CURTISS-WRIGHT

Electronic Flight Duplicators

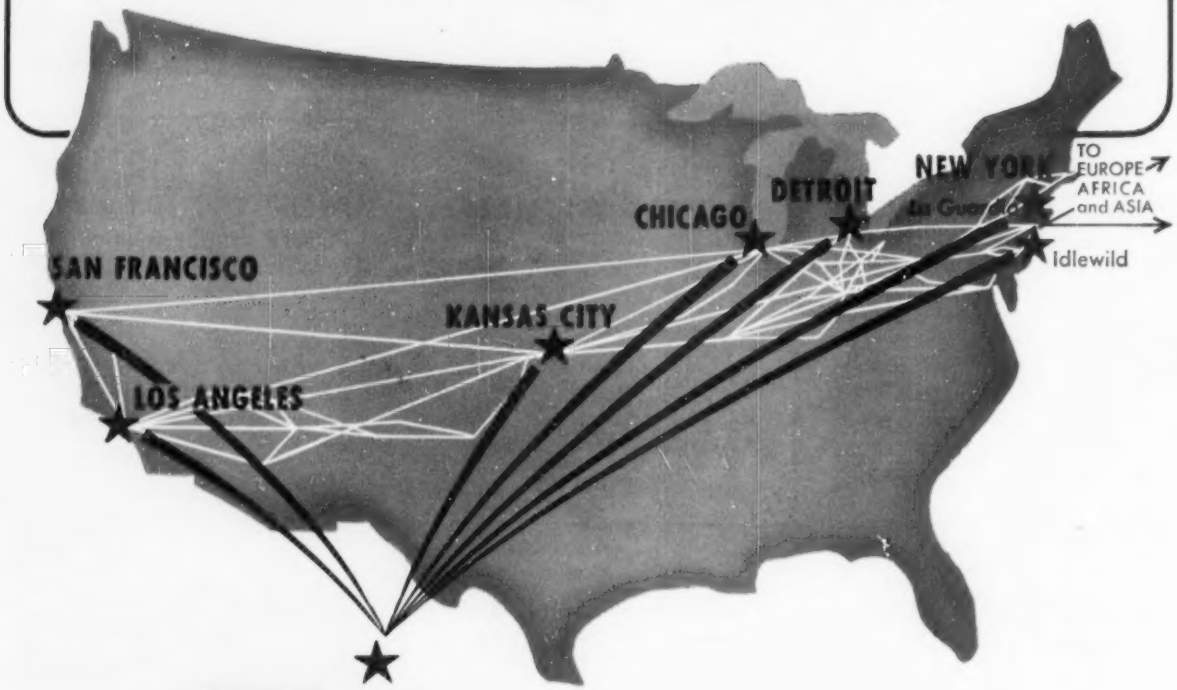

Curtiss-Wright Electronic Flight Duplicator

Trans World Airlines has purchased Curtiss-Wright Electronic Flight Duplicators for the training of pilots at each of the major U.S. centers where its air crews are based. An international air carrier, TWA's far-flung routes reach from San Francisco and Los Angeles across the United States to Europe, Africa and Asia.

JOBS FOR: ENGINEERS
ACCOUNTANTS • TECHNICIANS

CURTISS-WRIGHT
CORPORATION • WOOD-RIDGE, N.J.

First in Electronic Flight Simulation

ance or cost per mile of the airplane.

In its effective results, it would become the approximate equivalent of airplanes proposed for local operations. It might or might not achieve a substantial increase in passengers carried, and if it did not, it would achieve no economic benefit. I think increased scheduled services and improved dependability are much more important factors. I doubt if pressurization is necessary or economically justifiable.

► **Turboprop Picture Hazy**—In the larger domestic airline picture it appears highly desirable to endeavor to perform the services needed with a continuation of reasonable growth in the two general types now in use—exemplified on the one hand by the Stratocruiser, Constellation and DC-6 in medium- to long-range operations, and on the other hand, by the Convair 240 and 340 and Martin 4-0-4 for the shorter ranges of operation.

Since with the shorter-range aircraft, the field requirements are so important and the benefits of altitude and speed cannot be effectively realized, it would appear that a logical development would lie eventually in the turboprop type.

This picture is so hazy because of the unavailability of adequately proven or suitable powerplants and associated units, that we cannot discuss it sensibly except to point out that the same general engineering design comments to be referred to later apply equally to eventual developments in this field.

► **Designing the Jet Transport**—With respect to the medium- and long-range domestic aircraft, however, it is fairly clear that reasonable increases of size, coupled with the economic benefits to be achieved from high-altitude, high-speed operation, can permit the reasonably early development of such transports built around adequately proven and efficient jet powerplants.

As in the past, the design starts around an acceptable number—in this case four—powerplants of an adequately efficient and reliable type, with suitable horsepower or thrust-producing ratings. From this platform one can entertain variables in range, capacity and speed. Ranges are, of course, dependent on the minimum and maximum desirable or required distance characteristics of the operating airline. Capacities and speeds thereupon become the principal variables, coupled of course, with innumerable concepts of arrangement and functional characteristics.

With jet-type powerplants the necessity for performance at reasonably high altitudes and high subsonic Mach numbers becomes apparent. Drag-rise characteristics (dictating maximum speeds) directly influence the selection of wing thickness ratios and sweepback, and with the basic selection of powerplant location and arrangement, the airplane begins to take form.

Rather intricate studies involving assumed variations of performance and capacity lead eventually to a determination of the best compromises and a firm definition of the airplane. Frankly, this is the process which has been going on for many months—the final determination is, of course, the analysis of operating costs based, to some extent, on first costs including development, and leading to a decision both on the part of the manufacturer and his prospective customers as to whether the project should proceed.

► **What About Noise?**—Many other considerations are involved in such a decision. We are currently faced with a serious transport noise problem. It is not that which has affected the relationship with the occupants of the airplane fuselage, which has been reasonably solved to date and can certainly be handled in the future by known techniques, even with the disturbing noises emanating from jets.

The so-called noise problem of today is that which lies between the powerplants and equipment on or in the vicinity of the ground, and the people in the vicinity. The problem is being tackled on many fronts, and practical improvements have already been made in the nature of operational controls as to directions and altitudes of takeoffs, climbouts, approaches and landings. Baffles and directional reflectors and absorbers are coming into use to control some fixed ground run-up problems.

It has become quite evident that the problem is not strictly one of noise, but has substantial elements of individual and mass reactions to fear and various annoyances. People have indicated their great concern about noise and low flying in general, and have registered innumerable specific complaints of interruption of sleep, fear of crashes, annoying vibrations and rattling of dishes, interruptions of radio and TV programs, interruptions of telephone conversations and concern about frightened children. We can certainly not deny the existence, nor legitimacy, of this most serious problem.

While we are gravely concerned about the generation with large reciprocating engines of over-all maximum sound intensities of 100 to 105 db., and with conventional propellers of 115 to 120 db., we must look forward with even greater concern to the possible development with supersonic propellers of sound intensities approaching 130 db., and with unaugmented turbojets, of 125 db., rising to perhaps 140 db. with afterburners. These values are well beyond acceptable levels and threaten to reach proportions that we cannot hope to control satisfactorily by the simple

Hartwell Flush Latches

available for over 300 COMBINATIONS of door and frame thicknesses

Hartwell Trigger-action Flush Latches are produced in over 300 stock combinations of bolt and trigger offsets. We can supply a latch for any door of any thickness to be latched in a frame of any thickness to your specifications. No altering of panels and frames is necessary when Hartwell Flush Latches are installed. Offsets of bolt and trigger are stamped on each part for rapid and accurate selection of the correct latch for each installation. All Hartwell Flush Latches and Hinges are the result of over a decade of continuous specialized design and manufacture.

Write for new Flush Latch and Hinge Catalog.

HARTWELL
AVIATION SUPPLY COMPANY
9035 Venice Boulevard, Los Angeles 34, Calif.
Branch Office: Wichita, Kansas
Manufacturers of:
HARTWELL Cable Terminals
HARTWELL Aircraft Fittings

ACCO products CHECK

☐ Shaped Wire*

— Flat
● Round
Odd contour

Low or high carbon, stainless, special alloy, Armco. You draw the shape — PAGE can draw the wire.

☐ Armature Banding Wire

Tinned stainless or carbon steel. In reels of 50 to 200 pounds. Stainless has high tensile strength, high resistance, low permeability.

☐ Lock Safety Wire

Tough, durable, workable. In the size and type for your work.

☐ Spring Wire

Any shape* . . . high carbon . . hard drawn . . . high tensile . . . stainless . . . galvanized . . . tinned . . . bright.

*Cross-sectional areas up to .250" square; widths to ⅜"; width-to-thickness ratio not exceeding 6 to 1.

YOU do this—
Give us the specifications of the wire you need—or tell us details of job to be done.

WE'LL do this—
Send you recommendations, prices and delivery date. Samples on request. PAGE offers you a wide variety of wires to choose from.

Wire or Write Today

PAGE WIRE

ACCO

PAGE STEEL AND WIRE DIVISION
AMERICAN CHAIN & CABLE

Monessen, Pa., Atlanta, Chicago, Denver, Detroit, Los Angeles, New York, Philadelphia, Portland, San Francisco, Bridgeport, Conn.

expedient of operational restrictions.

It is absurd to suggest that a reasonable solution would be the relocation of airports or time limitations on their use. The penalties and depreciation of military and commercial values attendant on such a solution would work a totally unjustifiable disservice to the national interest. We must, therefore, consider the problem one of the most difficult but inspiring challenges which has been thrown at the scientists, engineers and operators of the country. It has been disappointing to find the degree of pessimism which prevails among the scientists and engineers on this subject. . . .

▶ **Noise Is Lost Energy**—It has been stated that noise is an unavoidable accompaniment of the generation of power or thrust and its application in the atmosphere. Nevertheless, we have such contradictory observations as that of two jets, the larger of which develops the lesser noise and apparently evokes the fewest complaints.

We, also, have the encouraging thought that sound represents lost energy even though it be small in percentage and magnitude. Efficiency gains, in some cases, can accompany sound reductions, and that hope should give an added stimulation to the program.

We know that the harnessing of exhaust energy by the operation of exhaust turbines, as in a compound engine, will make a reduction in the exhaust noise.

We also know that reduction of propeller tip speeds, with negligible loss of efficiency, although involving some weight penalties, produces marked benefits in noise reduction.

We know further that turboprop installations such as the British Bristol Britannia with Proteus engines have an encouragingly low sound level. In some installations, intake designs give annoying noises where in others they do not.

We know that precipitation and suitable ground cover are very helpful in promoting attenuation.

We are not sure of the reflective or sound directional control possibilities with jet exhaust. We know that some designs of exhaust jet are notably quieter than others. We know that on the ground reflective and absorptive baffles and sound shields can be provided.

All in all, I find no cause for pessimism, and feel that a wholehearted, intelligent and vigorous attack on all facets of the problem will bring it to a most gratifying conclusion.

▶ **Takeoff-Landing Performance**—Our somewhat larger, longer-range, high-altitude, highspeed transports must be injected into the increasingly crowded traffic patterns at existing airports. Obviously, such aircraft will find their primary use in connection with the larger centers of population, and the runway lengths available do not seem to present any problem with respect to takeoff except as to accelerate-stop distance.

Power required to achieve the high-speed performances and the relatively low wing loadings required for efficient operation at the high altitudes, would appear to give very adequate unaugmented takeoff characteristics. There is, of course, some question of variations of takeoff performance with temperature, but with reasonable accountability, this does not appear serious.

On the other hand, we must examine most carefully the aircraft performance during approach and landing. It would be most desirable if all aircraft could have a wide latitude of satisfactory approach and climb-out speeds, such that maximum consistency and good flexibility of operation would be available during the approach and climb regimes to accommodate at any given airport or on any given runway, a maximum traffic frequency.

If this cannot be accomplished, the situation will, of course, be largely dependent upon the aircraft having the highest required approach speed and the aircraft having the lowest climb speed. Presumably, all other aircraft could, if necessary, speed up their approaches within reason, or with sacrifices of efficiency decrease their climb speeds for maximum traffic capacity.

Anticipating a fully satisfactory climb performance for our future transport, we must then look to a satisfactorily low approach speed and adequate control to insure airport efficiency. The existing requirement of approximately 10% residual thrust on approach to provide prompt acceleration, if needed, gives us a difficult problem.

▶ **Reverse Thrust**—The other portion of this problem is, of course, the landing

"Olson, if you don't like my design, I wish you'd come right out and say so. . . ."

Douglas Airview News

Flight view of the Lockheed 1049 Super Constellation, the newest member of the famous family of Constellations that are in service on 16 major world airlines. All glass in the cockpit is Pittsburgh Flexseal Safety Glass.

Lockheed's new Super Constellation features improved cockpit vision with Pittsburgh Flexseal Safety Glass

NEWEST addition to Lockheed's famous family of Constellations is this giant 1049 Super Constellation. Pilot vision came in for careful attention in designing this plane, and every possible step was taken to assure the best visibility in all directions under every flying condition.

The seven openings in the cockpit are all glazed with flat Pittsburgh Flexseal Safety Glass. This glass and plastic lamination has been found ideal for the high-speed, high-altitude operation typical of the Constellations. It is flush-mounted with narrow posts that provide the least possible obstruction to vision and it is bird-resisting.

The three forward glass areas in the cockpit make use of electrically-heated Pittsburgh NESA Glass. This special type of Flexseal was installed after exhaustive tests of its heating and pressurizing cycles in Lockheed laboratories.

Thus the 88-passenger Super Constellation takes its place alongside many other commercial and military planes equipped with Safety Glass by Pittsburgh. Manufacturers consistently bring their glazing problems to Pittsburgh, knowing they'll receive competent engineering assistance along with Safety Glass specifically designed for the job it must perform.

We invite you to submit your Safety Glass and glazing problems to Pittsburgh engineers; they'll receive the most careful attention. Pittsburgh Plate Glass Company, Room 3179, Grant Building, Pittsburgh 19, Pa.

A close-up view of the side windows of the Super Constellation's cockpit. Note the unobstructed vision insured by an advanced joining method that permits the use of extremely narrow posts.



These three forward glass areas are electrically-heated NESA Glass to assure the best vision under every flying condition.

PAINTS · GLASS · CHEMICALS · BRUSHES · PLASTICS · FIBER GLASS

PITTSBURGH PLATE GLASS COMPANY

It's always VFR for...

DE HAVILAND DOVE

DEPENDABLE ESSO AVIATION PRODUCTS!

Flying executives, private plane owners, commercial airline operators all recognize the famous Esso Wings. They stand for dependable service at Esso Dealer Airports and high quality Esso Aviation fuels and lubricants.

There are hundreds of Esso Dealer Airports staffed with trained, experienced operators offering prompt service with Esso Aviation Products — products backed by constant research at America's largest petroleum research laboratory and proved by over 43 years of actual flying. You can depend on high quality Esso Aviation Products!

Wherever you fly, take along an Esso Aviation Credit Card and conveniently charge:

- Lubrication, tire and battery services.
- Landing fees.
- Over-night storage in transit.
- Minor emergency services.

TO GET THE ESSO CO-PILOT — a complete directory of Esso Dealer Airports, write Esso Aviation Products, Room 428, 15 West 51st St., N. Y. 19, N. Y.

Esso
AVIATION PRODUCTS

deceleration. With a clean jet-type airplane without reverse-thrust provisions, we are very dependent on a super-efficient landing technique and the existence of very satisfactory runway characteristics and airplane braking qualities.

We can, of course, look to dive brakes and other high drag devices for aerodynamic deceleration during the initial landing run. We might even look to drag chutes for such assistance on emergency fields, or in cases of slippery runways or over-shoots. However, the effectiveness of such devices rapidly diminishes with loss of speed, and they cannot be considered, in any sense, the equivalent of a reverse-thrust-producing mechanism for landing safety under all conditions. I look forward confidently to the development of satisfactory reverse-thrust mechanisms for jets.

► **Collision Problem**—In the field of operation, itself, we must look forward with increasing concern to the possibilities of collision with terrain, with other aircraft, as well as the adverse effects of rain, hail and turbulence. We cannot deny that increased speeds make these problems more difficult, and the adverse effects more important to avoid.

The "see-and-be-seen" principle is already obsolescent in consideration of increasing speeds and air traffic densities in the vicinity of major terminals. The interim provision of high-intensity flashing lights to help in the air-to-air collision problem is, of course, a worthwhile contribution. But, as speeds and traffic densities further increase, such devices do not alleviate the confusion.

It is evident that satisfactory airborne radar can be very beneficial as a defense against terrain collision, and can function as a supplementary navigational device, and can help greatly to avoid the high turbulence associated with thunderstorms. As yet, we have no answers except the meteorological approaches to the complete avoidance of hail collision or clear air turbulence, nor can radar be considered a satisfactory device for the prevention of air-to-air collisions, due to the rapidity of the relative motions and the confusion of the information presented in this instance.

It would seem that the solution to this problem lies in the area of more precisely controlled flight paths and patterns with the hoped-for development of cockpit indications and warnings possibly operated on the Doppler principle.

As to unavoidable turbulence . . . it is hoped much more will be done in the direction of gust alleviation provisions in basic airplane designs.

(The second and concluding installment based on Littlewood's Wright Brothers Lecture will appear in Aviation Week *next week.)*

Autosyn*

SYNCHROS

Precision-Built by

ECLIPSE-PIONEER

For more than 18 years, Eclipse-Pioneer has been a leader in the development and production of high precision synchros for use in automatic control circuits of aircraft, marine and other industrial applications. Today, thanks to this long experience and specialization, Eclipse-Pioneer has available a complete line of standard (1.431" dia. X 1.631" lg.) and Pygmy (0.937" dia. X 1.278" lg.) Autosyn synchros of unmatched precision. Furthermore, current production quantities and techniques have reduced cost to a new low. For either present or future requirements, it will pay you to investigate Eclipse-Pioneer high precision at the new low cost.

*REG. TRADE MARK BENDIX AVIATION CORPORATION

AVERAGE ELECTRICAL CHARACTERISTICS—AY-200 SERIES**

	Type Number	Input Voltage Nominal Excitation	Input Current Milliamperes	Input Power Watts	Input Impedance Ohms	Stator Output Voltages Line to Line	Rotor Resistance (DC) Ohms	Stator Resistance (DC) Ohms	Maximum Error Spread Minutes
Transmitters	AY201-1	26V, 400~, 1 ph.	225	1.25	25+j115	11.8	9.5	3.5	15
	AY201-4	26V, 400~, 1 ph.	108	0.45	45+j225	11.8	16.0	6.7	20
Receivers	AY201-2	26V, 400~, 1 ph.	100	0.45	45+j225	11.8	16.0	6.7	45
Control Transformers	AY201-3	From Trans. Autosyn	Dependent Upon Circuit Design				42.0	10.8	15
	AY201-5	From Trans. Autosyn	Dependent Upon Circuit Design				250.0	63.0	15
Resolvers	AY221-3	26V, 400~, 1 ph.	60	0.35	108+j425	11.8	53.0	12.5	20
	AY241-5	1V, 30~, 1 ph.	3.7	–	240+j130	0.34	239.0	180.0	40
Differentials	AY231-3	From Trans. Autosyn	Dependent Upon Circuit Design				14.0	10.8	20

**Also includes High Frequency Resolvers designed for use up to 100KC (AY251-24)

AY-500 (PYGMY) SERIES

Transmitters	AY803-4	26V, 400~, 1 ph.	235	2.2	45+j100	11.8	25.0	10.5	24
Receivers	AY503-2	26V, 400~, 1 ph.	235	2.2	45+j100	11.8	23.0	10.5	90
Control Transformers	AY803-3	From Trans. Autosyn	Dependent Upon Circuit Design				170.0	45.0	24
	AY503-5	From Trans. Autosyn	Dependent Upon Circuit Design				550.0	188.0	30
Resolvers	AY523-3	26V, 400~, 1 ph.	45	0.5	290+j490	11.8	210.0	42.0	30
	AY543-5	26V, 400~, 1 ph.	9	0.1	900+j2200	11.8	980.0	165.0	30
Differentials	AY533-3	From Trans. Autosyn	Dependent Upon Circuit Design				45.0	93.0	30

For detailed information, write to Dept. H.

ECLIPSE PIONEER DIVISION of Bendix AVIATION CORPORATION

TETERBORO, NEW JERSEY

Export Sales: Bendix International Division, 72 Fifth Avenue, New York 11, N. Y.

The entire TMI organization is built around this sound axiom: "Make it to finest quality standards and protect the quality of our customers' products." Our engineering and metallurgical divisions welcome your inquiries and are ready to assist in the solution of new and difficult problems in the application of

Cold Drawn Welded Stainless Steel and Special Alloy Tubing in Small Diameters... .050" to .625" O. D.

"Manufacturers Since 1941"

TUBE METHODS INC.

METALLURGISTS • ENGINEERS • MANUFACTURERS

BRIDGEPORT (Montgomery County), PA.

IAS Summaries

Papers discussing the effects of friction at high speeds were among those presented at the Institute of the Aeronautical Sciences' recent 21st annual meeting in New York.

Summaries of four IAS papers are printed here, continuing publication begun last week (p. 36). Additional papers will appear in succeeding issues.

Aerodynamics

▶ **Survey of Friction Coefficients, Recovery Factors, and Heat-Transfer Coefficients for Supersonic Flow.** Joseph Kaye, Assoc. Prof. of Mechanical Engineering, Massachusetts Institute of Technology.

In the past four years, significant experimental and theoretical contributions have been made in the study of the laminar boundary layer up to Mach 3.

Small discrepancies between theory and experiment still exist in this range for friction coefficients and recovery factors. The amount of experimental data on heat-transfer coefficients in this range is still almost negligible compared to the wealth of such data on subsonic flows. The greatest need is to extend the experimental data beyond Mach 3 and to investigate the effects of pressure gradient, radiation, transition, surface curvature, etc.

In the past four years, significant contributions have been made in the theory of the turbulent boundary layer for supersonic flow, but the quantity of experimental work has not kept pace with the theoretical work, especially in the case of heat-transfer coefficients. Experimental data on friction coefficients and recovery factors have been extended to Mach 3 and a length Reynolds number of 20 million, and these data agree within 10% of the results predicted by several theories. The greatest need is to obtain reliable data on heat transfer coefficients for turbulent boundary layers, since, practically speaking, none is available.

▶ **Direct-Force Measurements of Turbulent Skin Friction on Cone-Cylinders at Subsonic and Supersonic Velocities.** Dean R. Chapman and Robert H. Kester, Ames Aeronautical Lab., NACA.

The principal results of a study of all known theories for calculating turbulent skin friction in compressible flow are briefly reviewed. These various theories, approximately 15 in number, predict widely different effects of Mach number on skin friction (and, hence, also on heat transfer), thus emphasizing the inadequacy of the present turbulent boundary-layer theory and the need for experimental measurements.

During the last two years, systematic experiments have been conducted in the Ames 1- by 3-ft. supersonic windtunnels No. 1 and No. 2 to determine turbulent skin friction on cone-cylinder bodies of revolution having fineness ratios of 10, 15, and 25. Data were obtained by using a direct-force method of measuring the overall skin friction. Boundary-layer surveys determined correction necessary to the force measurements in order that the final data represent fully developed turbulent flow.

Measurements made with different pressure distributions showed no significant effect on skin friction of moderate changes in pressure gradient. At both subsonic and supersonic velocities, the skin-friction coefficient was observed to depend only to a small extent on the body fineness ratio. For each fineness ratio, however, the effect of Mach number was found to be large, amounting to approximately a 50% reduction in skin-friction coefficient at Mach numbers near 4 compared to corresponding values measured at subsonic Mach numbers. This effect of Mach number did not depend significantly on Reynolds number or body fineness ratio and was found to be in good agreement with experimental measurements.

Four of the various published theories of turbulent skin friction agreed with each other and with the measurements to within about 5% at all Mach numbers investigated.

At Mach 10, these same theories will predict values of skin friction which differ from each other by approximately 100%, thereby indicating need for future skin-friction measurements at hypersonic Mach numbers.

Flight Propulsion

▶ **Propagation of Stall in Compressor Blade Rows.** Frank E. Marble, Asst. Prof., Guggenheim Jet Propulsion Center, California Institute of Technology.

The stall propagation speed, steady and oscillating blade forces are calculated for a single blade row. The analysis is extended to two adjacent blade rows in relative motion, such as a stator and rotor combination. The influence of mutual interference upon the speed of stall propagation, steady and fluctuating blade loads may be strong depending upon the geometry and velocity diagrams for the two rows. The process of approaching and entering the state of rotating stall is discussed for a compressor utilizing an external throttling mechanism.

The observations that a propagating stall may occur which involves only a portion of the blade height are examined on the basis of a three-dimensional cascade theory.

Aircraft Design

▶ **Military Air Cargo Carrier Trends.** Walter Tydon, Chief Engr., Aircraft Div., Fairchild Engine & Airplane Corp.

This paper deals basically with the operational trends as they affect component and system designs, where speed becomes only one factor, with other more important factors being turn-around-time and ability to deliver to final destination. The fuselage design, with its trend toward high wing, is being more and more influenced by larger units of cargo.

Advance base operation has also had a marked influence on cargo types with requirements for low take-off and landing distances, low-speed stability and control, rough field gear, simplified loading, and need for lower turnaround-time. With these have come such accepted features as cockpit emergency egress hatches; external fuel with its advantages of safety, wider CG, cargo range, ease of refueling, service, and repair; and structural requirements for crash landings.

NAVY CONTRACTS

The following contracts were announced recently by the Navy's Aviation Supply Office, 700 Robbins Ave., Philadelphia 11.

Aero Instrument Co., 5105 Denison Ave., Cleveland 2, tube, pitot, 3,392 ea., $35,616.

Solar Aircraft Co., 2200 Pacific Highway, San Diego 12, support assemblies, $49,096.

McDonnell Aircraft Corp., P. O. Box 516, St. Louis 3, parts for FH and F2H aircraft, $63,295.

Nash Engr. Co., Wilson Ave., South Norwalk, Conn., pump assembly, 95 ea., $105,009.

Fairchild Camera & Instr. Corp., 88-06 Van Wyck Blvd., Jamaica 1, N. Y., motor, 200 ea., $25,315.

Advance Gear & Mach. Corp., 5851 Holmes Ave., Los Angeles 1, gear box, 28 ea., $26,100.

Skinner Purifiers Div., Bendix Aviation Corp., 1500 Trombly Ave., Detroit, filter assembly, 1,740 ea., $49,132.

Air Associates, Inc., Teterboro, N. J., maintenance parts for AD aircraft, $94,385.

Douglas Aircraft Co., El Segundo, Calif., maintenance parts for aviation armament, $318,545.

International Packing, 712 American Bldg., Richmond, Va., water drinking, emergency, $88,924.

Anyx Oils & Resins, 95 Broad St., New York 4, raw tung oil, 108,000 lb., $36,720.

Weston Hydraulics, 10918 Burbank Blvd., North Hollywood, Calif., sleeve assembly, 855 ea., $30,780.

National Lead Co., 2607 E. Cumberland St., Philadelphia 25, pigment, 120,000 lb., $35,640.

Airborne Accessories, 1414 Chestnut Ave., Hillside 5, N. J., actuators, $115,334; maintenance parts for various aircraft, $141,117.

Holley Carburetor Co., 5930 Vancouver Ave., Detroit, fuel control, 50 ea., $149,500.

Douglas Aircraft Co., 3000 Ocean Park Blvd., Santa Monica, maintenance parts for R5D aircraft, $190,719.

Victory Apparel Mfg., 250 Passaic St., Newark 4, N. J., adult life preservers, $556,706.

B. F. Goodrich Co., 500 S. Main St., Akron 18, brake assembly, 171 ea., $192,026.

Pesco Products Div., Borg-Warner Corp., 24700 N. Miles Road, Bedford, Ohio, hydraulic pumps, $157,356.

Mine Safety Appliances, Braddock, Thomas & Meade Sts., Pittsburgh, mask, 2,955 ea., $58,302.

New Jersey Zinc Sales Co., Inc., pigment, 288,000 lb., $40,608.

Foote Bros. Gear & Machine Corp., 4545 S. Western Blvd., Chicago, actuators & boxes for various aircraft, $38,710.

Lockheed Aircraft, 2555 N. Hollywood Way, Burbank, hydraulic valves, $36,980.

Eclipse-Pioneer Div., Bendix Aviation Corp., Teterboro, N. J., instruments for various aircraft, $27,907; air pump and spare parts, 843 ea., $502,540.

Welson Tool Co., 3000 Woodhill Road, Cleveland 4, pump assembly, 690 ea., $52,380.

Foote Bros. Gear & Mach. Corp., 4545 S. Western Blvd., Chicago, ball screw assembly, 200 ea., $62,794.

AiResearch Mfg. Co., div. of The Garret Co., 9851-9951 Sepulveda, Los Angeles 45, actuators, $94,560; parts for various aircraft, $65,248.

Adel Div., Gen. Metals, 10777 Van Owen St., Burbank, parts for various aircraft, $234,770.

Peterson Co., 350 Pennsylvania Ave., Freeport, N. Y., float, life, 185 ea., $26,659.

Garfield Electric Co., 68 E. 116th St., New York 29, clocks, 4,540 ea., $33,596.

Consolidated Vultee Aircraft Corp., Lindbergh Field, San Diego 12, parts for P4Y aircraft, $42,229.

AEROTEC AUTOMATIC CONTROLS

are test-proven to perform

Exactly

to your specifications

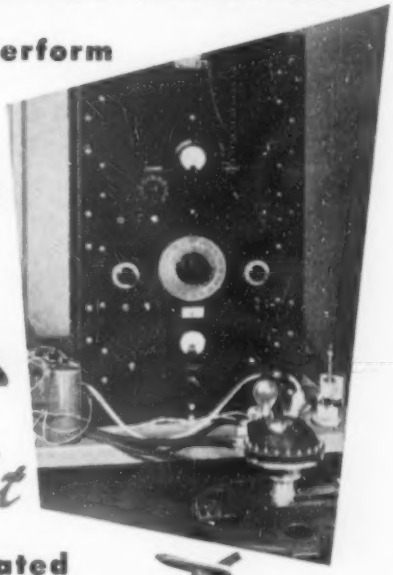

Actual flight

conditions are duplicated in Aerotec test laboratory

This Aerotec sensitive low pressure differential switch utilizes ram-air

Standards of quality, workmanship and efficiency that you specify are met in Aerotec Automatic Controls. Aerotec specializes in *custom-built* instruments and controls that safeguard automatic operations on military and commercial aircraft.

Before delivery, Aerotec controls undergo rigid tests of extreme temperatures, rarefied atmosphere, and others, simulating actual service conditions. For example, a typical test is underway on the vibration test equipment shown above in the Aerotec laboratory. This equipment subjects the control to vibrations up to 70,000 cycles per second and 10g's acceleration.

Extreme care marks every step of design, manufacture, and testing at Aerotec. That is a big reason why every major U. S. aircraft manufacturer uses Aerotec Automatic Controls. Let us help with *your* control problems. Call or write.

AIRCRAFT REPRESENTATIVES

CLEVELAND 29, OHIO — Jay Engineering Co., 5413 Pearl Rd.
GREENWICH, CONN. — John S. Hammond, Inc., 45 E. Putnam Ave.
SEATTLE 1, WASH. — John E. Freeman & Assoc., 1529 9th St.
DAYTON 3, OHIO — Jay Engineering Co., 4721 East 3rd Street
GLENDALE 2, CALIF. — Forsnes Engineering Co., 1102 W. Glenoaks Blvd.
BALTIMORE, MARYLAND — John S. Hammond, Inc., Stanley L. Manton, Cromwell Ridge Road, Loch Raven, Maryland
WICHITA 17, KANSAS — John E. Freeman & Assoc., 5401 E. Kellogg

Project Engineers

THE THERMIX CORPORATION
GREENWICH, CONNECTICUT

Canadian Affiliates: T. C. CHOWN, LTD.
1440 St. Catherine St. W., Montreal 25, Quebec • 983 Bay Street, Toronto 5, Ontario

THE AEROTEC CORPORATION
AIRCRAFT DIVISION — GREENWICH, CONNECTICUT

Designers and Manufacturers of Automatic Controls—*Valves:* Regulating, Relief and Check types—*Pressure Switches:* Gage, Altitude, Differential and Absolute Types—*Float Switches:* Top, bottom or side mounted—Single, Dual, or Tandem.

No Ceiling ON COST-SAVING IDEAS!...

WITH ADEL LINE SUPPORTS

The World's Most Complete Selection of CLIPS, BLOCKS and HARNESS STRAPS—15,000 different types and sizes for Positive, Vibration-Free Support in Aircraft, Marine and Industrial Installations. Whatever your requirements, ADEL is the one source able to supply Line Supports of Superior Quality *plus* the Advantages of Standardization. Only *one* call for selection and ordering. A smaller and more flexible inventory of units. Quicker and easier training of personnel through the need for familiarization with fewer products.

Special ADEL tool cuts Clip assembly costs tremendously by lessening finger-fatigue and speeding work. Users report thousands of hours of assembly time saved. For your FREE SAMPLE, instruction sheet and demonstration, contact nearest ADEL service engineer.

Illustrated are a few samples of the World's most complete and unsurpassed assortment of Line Supports available. They are *First in Preference* because they meet or surpass the most exacting specifications. Consider the advantages of standardization—*Economy—Flexibility—Safety—Durability . . . Specify* ADEL.

ADEL LEADER IN LINE SUPPORTS

Write for complete data. Direct inquiries to HUNTINGTON DIVISION

DIVISION OF GENERAL METALS CORPORATION • BURBANK, CALIF. • HUNTINGTON, W. VA.

CANADIAN REPRESENTATIVE: RAILWAY & POWER ENGINEERING CORPORATION, LIMITED.

Big Brain to Solve Aviation Problems

- **Oarac memory can hold up to 10,000 'words.'**
- **First task: solving of 1,011-equation problem.**

By Philip Klass

Syracuse, N. Y.—Oarac, newest entry in the field of large electronic digital computers, is expected to save the Air Force and the aviation industry valuable research and development time, as well as much costly flight testing previously required in the development of complex aviation equipment.

Developed by General Electric's electronics division here, Oarac's claim to fame in automatic computer circles is its comparative simplicity and its very large internal memory.

A minor crisis in the Oarac program occurred when the Office of Air Research, for whom the computer was named, had its name changed to Flight Research Laboratory. Rather than change the computer's name to the unpronounceable Frlac, General Electric stuck to Oarac.

Brig. Gen. L. I. Davis, director of armament at Air Research and Development Command headquarters in Baltimore recently accepted Oarac for the USAF and it is now on its way to the Flight Research Lab at Wright Air Development Center in Dayton. There it will soon be solving complex problems in avionics, physics, aerodynamics, ballistics, logistics, and even dietetics.

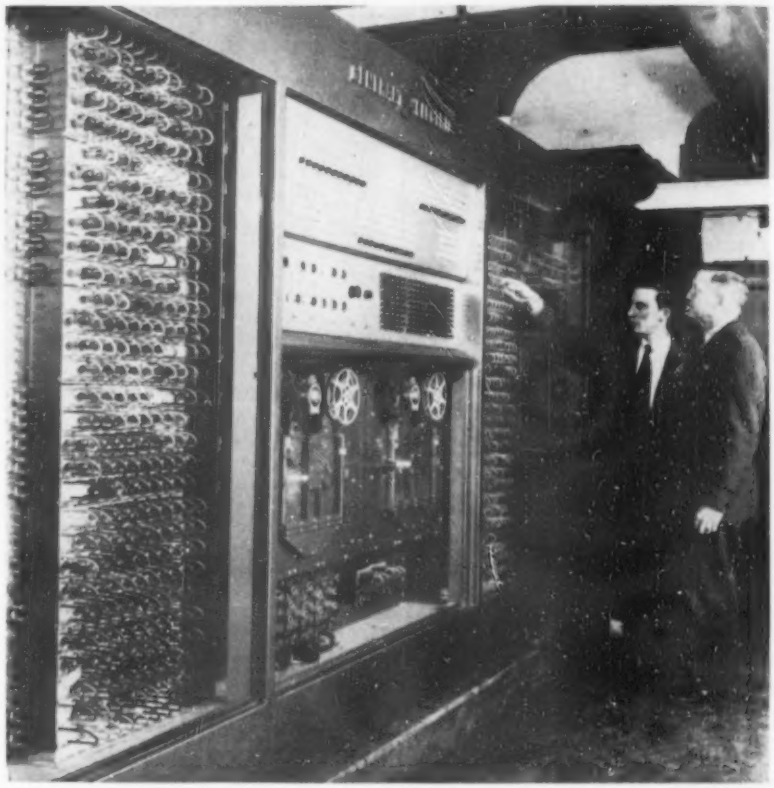

OARAC, GE-built automatic computer, will help speed development of new aircraft and equipment. Gen. L. I. Davis is seen inspecting USAF's new analytic tool.

►**Avionics Problem First**—Oarac's large internal memory, capable of storing 10,000 "words" (a "word" is a 10-digit number, plus sign, or an operational instruction), equips it to handle problems like its first FRL assignment in magneto-ionic theory. The problem requires the solution of 1,011 simultaneous equations.

The object is to find the index of refraction, index of absorption, and polarization of low-frequency radio waves in an ionized medium in the presence of an external magnetic field.

If this problem were given to an experienced operator working with a conventional automatic desk calculator, he would need about 20 years to solve it; Oarac will provide the complete solution in about 200 working hours, GE says.

►**Technical Speaking**—In the language of computers, Oarac is a serial decimal, binary coded, single-address machine with magnetic tape input and output, and a magnetic drum internal memory. "Decimal serial" means that the computer works with numbers in decimal form and that the "weight" of any digit in a number is determined by its position relative to other digits in the number. (In the number "88" for example, the first eight has 10 times the weight of the second eight, by virtue of its position.)

Each digit in a number is represented by a binary code or combination of four binary digits. The four binary digits are always stored and handled in parallel (simultaneously) for each decimal digit.

By "single address" is meant that a single command contains only the information on the location of information to be pulled out of the memory, or to be placed in the memory, but not both.

►**Not the Speediest**—By comparison with some electronic computers, Oarac appears to be "slow-witted." It can perform only 110 operations (additions, subtractions, etc.) per second. (Raydac, built by Raytheon Manufacturing Co. for Navy BuAer, reportedly operates 10 to 15 times faster.)

Actually Oarac could do better if it were not for delays involved in getting data out of its large internal memory. (Maximum access time to any "word" stored in the internal memory is 17 milliseconds.) Basic (counting) pulse repetition rate is 150,000 per second.

GE reasoned that super speed is not the most desirable feature in a computer. A medium-speed machine which has good reliability can turn out more work than a super-speed machine whose complexity is so great as to cause frequent failures. Even a "slow" electronic computer operates so rapidly that it is apt to run quickly through the available supply of complex problems worthy of its efforts. In most cases, it is the time required for human operators to set up

Frankly, working at North American requires hard thinking and plenty of vision. Because North American always works in the future. Yet, if you are interested in advanced thinking, if you'd like to work on the planes that will make tomorrow's aviation history, you'll like working at North American. North American offers these extra benefits, too.

North American Extras—

Salaries commensurate with ability and experience • Paid vacations • A growing organization • Complete employee service program • Cost of living bonuses • Six paid holidays a year • Finest facilities and equipment • Excellent opportunities for advancement • Group insurance including family plan • Paid sick leave • Transportation and moving allowances • Educational refund program • Low-cost group health (including family) and accident and life insurance • A company 24 years young.

Write Today

Please write us for complete information on career opportunities at North American. Include a summary of your education, background and experience.

CHECK THESE OPPORTUNITIES AT *North American*

- Aerodynamicists
- Stress Engineers
- Aircraft Designers and Draftsmen
- Specialists in all fields of aircraft engineering
- Recent engineering graduates
- Engineers with skills adaptable to aircraft engineering
- Electrical and Electronic Engineers

NORTH AMERICAN AVIATION, INC.

Dept. 10, Engineering Personnel Office
Los Angeles International Airport
Los Angeles 45, Calif.; Columbus 16, Ohio

North American Has Built More Airplanes Than Any Other Company In The World

SOLUTIONS are recorded on magnetic tape for transcription by electric typewriter on output console. Problem is set up on tape for computer from similar console.

the problem, rather than computer speed, that limits a computer's useful output.

▶ **Simplicity the Goal**—To achieve maximum computer simplicity, GE engineers decided to:

• **Eliminate permanent programs.** Except where a few added components would save considerable work in programming a problem, GE eliminated the complexity of built-in (permanent) program operations. Instead, Oarac's large internal memory makes it feasible to store the complex programs or sequences on magnetic tape. Frequently encountered problems can be "taped," to form a library. Only the special boundry conditions peculiar to a particular problem need then be added to the tape.

• **Standardize circuits.** By what it calls "careful use of symbolic logic," GE was able to standardize on seven basic circuits. These are able, GE says, to perform all required storage, gating, choice, mixing, and regeneration functions. With fewer circuits, more engineering effort could be put into the design of each circuit.

▶ **Proof of the Pudding**—One example of Oarac's comparative simplicity is that it uses only 1,400 vacuum tubes and 7,000 germanium diodes. (Raydac, for example, uses 5,000 tubes and 18,000 diodes.) Even an infinitesimal percentage of tube failures can result in frequent computer shutdowns. To improve Oarac's tube life, tube filaments are operated at 90% rated voltage.

To facilitate maintenance, all the basic circuits are built on quick-disconnect, plug-in chassis (manufactured by Alden Products Co.). Chassis handles are color coded to identify each type of circuit. Each assembly is constructed to permit the flow of forced cooling air through the adjoining units on the computer rack.

▶ **Link With Outer World**—Like most computers, Oarac's line of communications with the human world comes through magnetic tape. A human operator, working at an "input console," types out the problem on a standard electric typewriter. The console automatically codes and records the information on magnetic tape. When the computer is available, the tape is inserted. Tape can provide the computer with data as fast as it can devour it.

Because the computer spews out its answers too quickly for an electric typewriter to keep pace, the solution is also "taped" on another magnetic tape. The tape is then removed, freeing the computer for another problem, and transcribed on the "output console" at a leisurely rate (96 "words" per minute) which an electric typewriter can handle.

Output console controls permit the answers to be typed out in any one of a variety of tabular forms.

▶ **Internal Memory**—Oarac's internal memory consists of a large cast aluminum alloy drum (22 in. diameter, 30 in. length) coated with a ferrous (magnetic) material and driven at a speed of about 3,400 rpm.

Because each decimal digit is represented by a four binary-digit code, four magnetic recording heads are needed to record each decimal digit on the memory drum. These four magnetic heads are mounted at 90-deg. intervals around

BRIGHT MINDS CONJURE UP ELECTRONIC MENTAL GIANTS

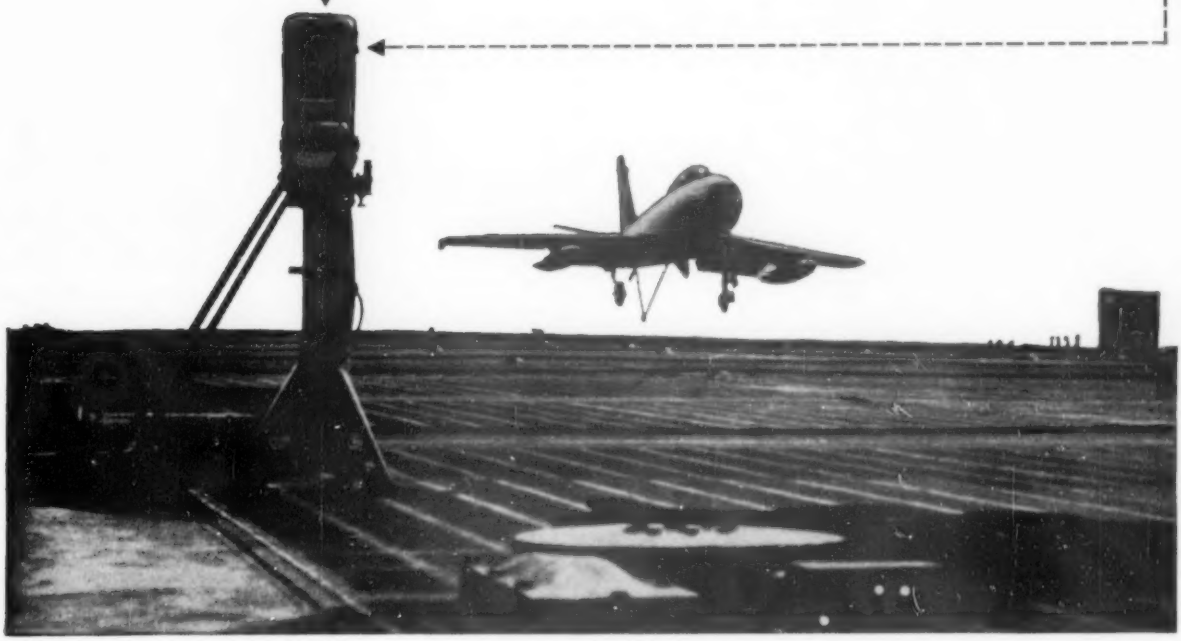

AT NORTH AMERICAN AVIATION

An airplane's rate of descent used to be painstakingly computed from photographs which took several days to evaluate. Then North American's electro-mechanical engineers developed TRODI (above) for the Navy for carrier suitability tests.

TRODI is an electro-optical Touchdown Rate of Descent Indicator that watches the airplane descend, measures its rate, and electronically readies its information so it's available the minute the pilot lands. TRODI's electronic brain saves untold time, men and money for the Navy.

TRODI is just one ingenious example of the challenging electronic and electro-mechanical work being pioneered at North American by some of the nation's best scientific minds, using the most advanced facilities.

If you like theory, you may find an exciting and secure future at North American in the field of operations analysis, advanced dynamics, kinematics, noise, error or information theory, systems engineering, statistical quality control or servo analysis.

If research and development are your specialty, you'll find attractive opportunities in radar and communications systems, analogue and digital computers, automatic guidance systems or optics.

Write today, including a summary of your education and experience, to:

NORTH AMERICAN AVIATION, INC.

Engineering Personnel, Missile and Control Equipment Department

12214 Lakewood Boulevard, Dept. 93-A, Downey, California

NORTH AMERICAN HAS BUILT MORE AIRPLANES THAN ANY OTHER COMPANY IN THE WORLD

"she might have been my kid..."

"There was no time to stop, see? She comes running out from behind this parked car right under my wheels. Her hair is in pigtails, and with the sun shining on it, she might have been *my* kid. We got her to the hospital. It took 3 pints of blood to bring her around. All I have to do is remember the sound of those screaming tires—and I know why *I'm* giving blood."

Yes, all kinds of people give blood—truck drivers, office workers, salesmen. And—for all kinds of reasons. But whatever *your* reason, this you can be sure of: Whether your blood goes to a local hospital, a combat area or for Civil Defense needs—this priceless, painless gift will some day save an American life!

Business Executives!

✓Check These Questions!

If you can answer "yes" to most of them, you—and your company—are doing a needed job for the National Blood Program.

- ☐ Have you given your employees time off to make blood donations?
- ☐ Has your company given any recognition to donors?
- ☐ Do you have a Blood Donor Honor Roll in your company?
- ☐ Have you arranged to have a Bloodmobile make regular visits?
- ☐ Has your management endorsed the local Blood Donor Program?
- ☐ Have you informed your employees of your company's plan of co-operation?
- ☐ Was this information given through Plant Bulletin or House Magazine?
- ☐ Have you conducted a Donor Pledge Campaign in your company?
- ☐ Have you set up a list of volunteers so that efficient plans can be made for scheduling donors?

Remember, as long as a *single* pint of blood may mean the difference between life and death for *any* American . . . the need for blood is *urgent!*

Give Blood Now

CALL YOUR RED CROSS TODAY!

NATIONAL BLOOD PROGRAM

SEVEN BASIC UNITS, such as this, make up Oarac. They are mounted on plug-in chassis for easy maintenance.

the circumference of the memory drum and are referred to as a "parallel track."

Each track is capable of recording 200 decimal "words" (2,200 decimal digits, or 8,800 binary digits) around the circumference of the drum. There are a total of 50 such tracks, with recording heads, spaced along the length of the drum. This gives the drum a total capacity of 10,000 "words."

A single magnetic head is used both for recording and reading out information from the memory drum. This eliminates the head alignment problem existing when separate heads are used to perform the record-in and the read-out functions.

► **Self Checking**—Like many computers, Oarac has provisions for automatically checking its computations lest it show the human failing of making a mistake. One inherent self-checking feature arises from the use of the four binary-digit code to represent each decimal number. The four binary digits provide 16 possible combinations (2^4), but only 10 of these combinations are used to represent the ten decimal numbers from zero to nine.

If a computer malfunction causes any one of the six unused binary combinations to come up, the machine spots them as easily as a poker player would "call" his opponent if he laid down "five aces" when there was "nothing wild." When the computer spots such an impossible combination, it automatically stops and rings an alarm.

Oarac also has a "roll back" provision to check against faulty programming or a single transient failure.

The computer can be set up to make occasional accuracy checks by performing a given calculation in two different

ANOTHER RIGHT HAND!

LICENSED AND EXPERIENCED ENGINEERS AND EXPERIMENTAL SHOP TO RELIEVE DEVELOPMENT AND PROTOTYPE OVERLOAD ARE AVAILABLE

BRISTOL ENGINEERING CORP.

POND ST.-LINCOLN AVE.
BRISTOL, PENNA.
BRISTOL 7894



AERONAUTICAL
ELECTRONIC
MECHANICAL

HANSEN COUPLINGS
...give you 2 big advantages

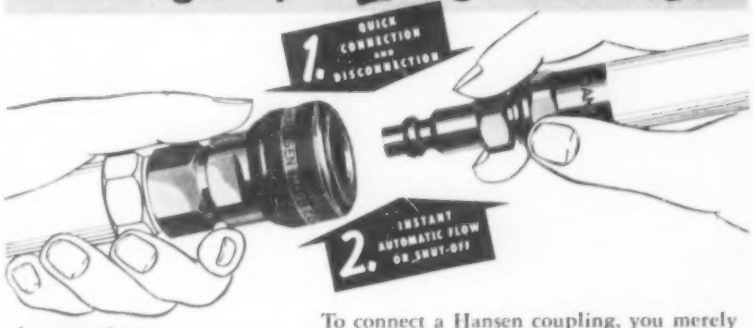

Locking pins in Hansen Push-Tite Coupling Socket afford large area contact with plug, thereby preventing wear and subsequent leakage.

To connect a Hansen coupling, you merely push the plug into the socket with one hand. Flow is instantaneous. To disconnect, push back sleeve on socket . . . coupling disconnects. Flow is shut off instantly and automatically. *One-way shut-off, two-way shut-off, and straight-through types. Write for Catalog.*

REPRESENTATIVES

BALTIMORE	DAYTON	KANSAS CITY	NEW ORLEANS	SEATTLE
BIRMINGHAM	DENVER	LOS ANGELES	PITTSBURGH	ST. LOUIS
CHICAGO	DETROIT	LOUISVILLE	ROCHESTER	MONTREAL
CLEVELAND	FT. WAYNE	MILWAUKEE	SAN FRANCISCO	TORONTO
DALLAS	HARTFORD	MINNEAPOLIS	SAVANNAH	VANCOUVER

Export Department: Cleveland

THE HANSEN MANUFACTURING COMPANY
4031 WEST 150th STREET • CLEVELAND 11, OHIO

FLITE-TRONICS CA-1 AUDIO DISTRIBUTION AMPLIFIER
gives 7.5 watts of power for really practical cockpit loudspeaker operation in any size aircraft!

get complete relief from earphone discomfort with the CA-1 amplifier "powering" their loudspeakers. Reliability, time-delay muting of marker channel and ease of maintenance make the CA-1 the logical airline choice!

praise the CA-1 for offering integral single or simultaneous audio channel selection. Ample power to properly operate loudspeakers in high noise level areas, rugged construction and space-saving dimensions are featured.

like the way the CA-1 fits into formerly unusable space and operates on minimum current consumption without penalty to light aircraft power supply. Low cost and simple installation plus headphones available, if desired, at the flick of a switch, is a popular feature with all pilots!

FOR COMPLETE INFORMATION on the CA-1 Audio Distribution Amplifier and the MB-3 Marker Beacon Receiver, another Flite-Tronics, Inc. product, write us at 3303 Burton Avenue, Burbank, California.

FLITE-TRONICS, inc.
BURBANK • CALIFORNIA

ways, and then comparing the results. If the results agree, Oarac automatically proceeds to go to work on its next operation.

If the results fail to agree, the computer returns to the previous check point and repeats the dual operation. If the answers still don't jibe after three checks, Oarac will "give up," and ring the alarm.

► **Eye to Automatic Factory**—GE's interest in digital computers appears to lie beyond building an occasional special-purpose mathematical wizard like Oarac. The Syracuse electronics division which built Oarac is also developing automatic factory-type machines for the Signal Corps. These are designed to produce electronics assemblies completely automatically (AVIATION WEEK Nov. 17, 1952, p. 36).

Such machines will take their operating instructions in digital form from magnetic tapes—the same technique used in Oarac. GE sees a large potential market for digital control units for use in automatic factories in the electronic, chemical, and other manufacturing industries.

IATA Radio Meeting Transcript on Sale

The International Air Transport Assn. has published in book form a transcript of its three-day airborne radio symposium held last May in Copenhagen (AVIATION WEEK June 23, 1952, p. 54).

The 252-page book gives a verbatim report of the ideas expressed by 150 representatives of 23 IATA airlines and 45 equipment manufacturers, government and research agencies. The IATA symposium, and its transcript, covered such subjects as HF, VHF and UHF radio communications, presentation of navigational information, aircraft antenna installation, and equipment design and installation. Several papers on single side-band transmission, secondary radar system, etc., are included in the book's appendix.

Transcript copies are available for $3.00 from IATA, International Aviation Bldg., Montreal 3, Quebec, Canada.

Oscilloscope Gives Precise Flight Checks

A lightweight precision cathode-ray oscilloscope available from Tektronix, Inc., gives a wide choice of time bases between one microsecond and 50 seconds. Its linearity permits waveform voltage to be read directly from the 3-in. screen in any one of nine calibrated ranges.

The new type 315D weighs only

Aetco

HOSE ASSEMBLY TESTING

Economize on your own technical personnel. Use fast AETCO SERVICE—America's finest facilities for performance testing of hose assemblies, including:

1. **Fire Resistance Tests**
2. **Oil Circulation & Vibration Tests**
3. **Fuel Circulation & Vibration Tests**
4. **Impulse Tests, using Hydrauliscope**
5. **Soaking Tests**
6. **All or parts of requirements of MIC-F-5070**

General aircraft component testing, including hydraulic, pneumatic, electrical (400 cycle AC-DC) and mechanical.

Aetco **AIRCRAFT EQUIPMENT TESTING COMPANY**
1806-12 FLEET ST. BALTIMORE 31, MD.

7¢ FUEL TAX NOW EXEMPTED in South Carolina

REFUEL WHERE PRICES ARE LOWEST!

Refuel on the eastern seaboard in South Carolina where retail fuel prices are the lowest and where airport facilities and service are unexcelled.

MAXIMUM PRICES*
80 oct. 31¢ 90 oct. 32¢
100 oct. 33¢
• Many dealers offer lower prices on quantity purchases.

South Carolina— Midway between New York and Miami

SOUTH CAROLINA AERONAUTICS COMMISSION

35 lb. and operates from 115 v., 50- to 800-cycle power, so that it can be used aboard aircraft for radar or communication equipment checks. A 5X magnifier allows the time base to be expanded either side of center and a direct-coupled trigger amplitude discriminator permits trigger phasing on complex waveforms. (Tektronix, Inc., Post Office Box 831, Portland 7, Oregon.)

It's a Small World In Components

Two new avionics componets are called "the world's smallest" by their respective manufacturers. The devices are:



• **Molded paper capacitor,** only $\frac{3}{8}$ in. long and 0.175 in. dia. It is reportedly designed for continuous operation at temperatures up to 125C. Designated Type 85P, the new capacitor is available with tolerances of 20%, 10%, or 5% if required. Added information is available in Bulletin 205E from Sprague Electric Co., 327 Marshall St., North Adams, Mass.

• **Pulse transformer** capable of providing a 0.1 microsecond pulse width with a rise time of less than 0.005 milli-microseconds, according to the manufacturer. Unit reportedly meets MIL-T-27 and can operate continuously at temperatures of −70 to 125C, or up to 150C for short periods. Designated MPT 101-0.1, the pea-sized transformer weighs 0.03 oz. and is hermetically sealed. It is made by PCA Electronics, Inc. 6368 De Longpre Ave., Hollywood 28, Calif.

FILTER CENTER

► **McDonnell Buys Telereader**—McDonnell Aircraft Co. hopes to speed analysis of flight and windtunnel data by factor of 10 with its newly purchased Telereader and Telerecorder equipment. Made by Telecomputing Corp. of Burbank, Calif., the new equipment will be used in McDonnell's helicopter engineering division.

► **Simplified Assembly**—Westinghouse has cut assembly time of its aircraft d.c. voltage regulator by substituting a single-piece die-cast aluminum base for the 50-piece fabricated base previously used. Another saving is made in regulator frame. Previously fabricated from 140 separate pieces, Westinghouse now uses a single high-impact-strength molded plastic frame.

► **60-Kva. Alternator**—Latest and largest addition to Westinghouse Electric's line of aircraft alternators is a 3-phase, 400-cycle, 60-kva. machine for operation in the 5,400-to-6,600-rpm. speed range. Alternator which weighs 125 lb., can deliver 150% rated load for five minutes, 200% rated load for five seconds, Westinghouse says. —PK

TESTED and PROVED
On the Speedway
In the Skyways
Klincher LOCKNUT
...take advantage of ALL the STRENGTH designed in your bolt!
has no equal where VIBRATION, TENSILE STRENGTH, CORROSION, HIGH TEMPERATURE are factors!
When proper torque is applied Klincher Locknut will never vibrate loose. Spins freely down to work. On the severest of all jet-engine, race car and like applications Klincher has been tested, proved and acclaimed for these standout advantages:
• Reduces torsional load in bolt!
• Can be re-used many times!
• Saves time, labor installing, removing!
• Only one piece to stock and handle!
• Ideal for standard and power wrenches!
• Manufactured in various materials!
TORQUE vs BOLT ELONGATION
3/8"-24 AN BOLT—GRIP 2.117
WRENCH TORQUE
600
500
400
300
200
100
STAINLESS KL-NUT 9, THREADS
STAINLESS HIGH NUT 11 THREADS
.001 .002 .003 .004 .005
BOLT ELONGATION
Inquiries are invited regarding special locknut problems involving shank, nuts, weld nuts, channel nuts and others. Write for data and samples, giving size and application. Address Dept. AW-2-3.
UNLOCKED
LOCKED
KLINCHER LOCKNUT CORP.
INDIANAPOLIS

NEW miniature damped control motor type 17 ID....

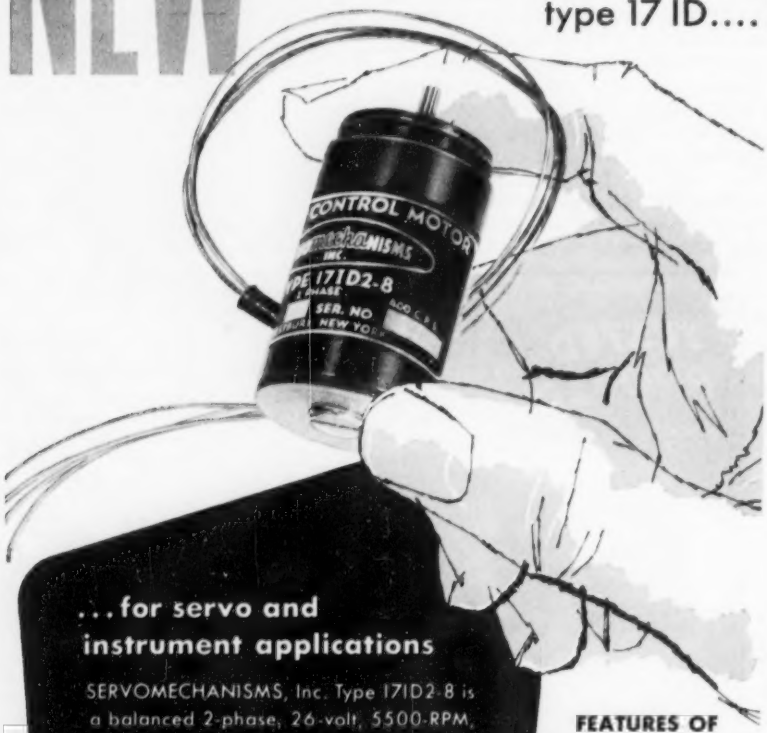

...for servo and instrument applications

SERVOMECHANISMS, Inc. Type 17ID2-8 is a balanced 2-phase, 26-volt, 5500-RPM, 400-cycle damped induction motor employing a drag cup and an axially adjustable magnet to achieve velocity damping. This design provides for variable and smooth linear velocity damping and lower operating temperature. The desired degree of viscous damping is achieved by operating setscrew adjustment.

• • • •

The non-damped induction control motor 17I2-8 of 8,000 RPM is also available.

FEATURES OF DAMPED CONSTRUCTION DESIGN INCLUDE

- Cogless Damping
- Zero Residual Noise Signal
- Constant Damping
- Lower Inertia
- Lower Cost

Write to Dept.-CLO-3 for specific information on motors.

OTHER INSTRUMENT MOTORS

• • • • • Hysteresis Synchronous design, Type 17HI-8 for 26 volts and Type 19H for 115 volts in speeds of 8,000, 12,000, and 24,000 RPM are available for various applications. Special windings and external shaft configuration can be provided on request.

SERVOmechaNISMS INC.
WESTBURY, L. I., N. Y.
EL SEGUNDO, CAL. NEW CASSEL, N.Y.

Darnell CASTERS

•

Choose just the right caster or wheel for your needs from the Darnell line of nearly 4000 types. These precision made casters and wheels will help you speed up production . . . will pay for themselves many times over.

SAVE EQUIPMENT
SAVE FLOORS
SAVE MONEY
and **TIME**

•

DARNELL CORP., LTD.
DOWNEY, (Los Angeles County) CALIF.

60 Walker Street, New York 13, N.Y.
36 North Clinton, Chicago 6, Illinois



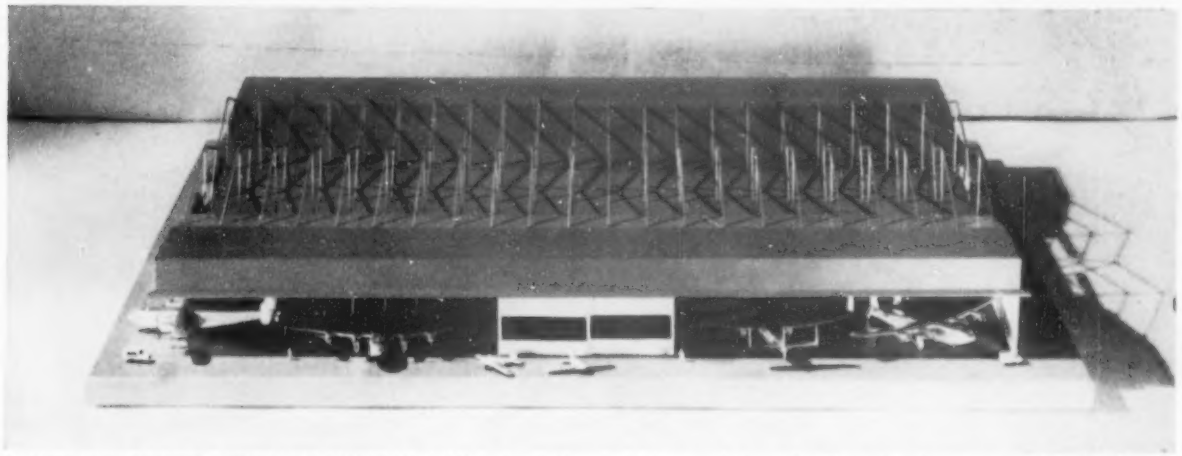

CANTILEVER-ROOF AIRCRAFT HANGAR (sliding doors in center) is new design offered to aircraft operators that affords . . .

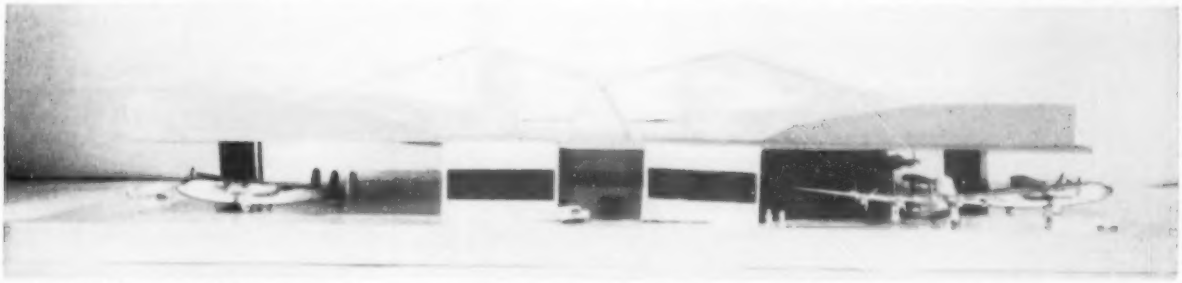

UNOBSTRUCTED FLOOR SPACE which can be used for large-scale production overhauls. Double unit is pictured.

Expandable Hangar Features Clear Floor

By George L. Christian

A cantilever-roof aircraft hangar has been developed to give airline operators 100% unobstructed floor space and to allow simple expansion of the structure. The same type of construction could be adopted to manufacture of planes.

Designed by structural engineer Paul Rongved, and Cyril P. Erwin of Erwin-Newman Co., the hangar is built from an oblong office-and-shop lean-to that extends along one side and anchors cantilever girders supporting the roof. Sliding doors enclose the other three sides of the hangar but may be stored to give a maximum amount of floor space.

▶ **First Construction**—Thompson-Starrett Co., Inc., New York, is preparing to build the first cantilever-type hangar at Westchester County Airport in White Plains, N. Y., and lease it to Westair, Inc., a fixed-base operator.

Cost of the hangar will be "in excess of $1 million," Gerald Wilson, chief salesman at Thompson-Starrett, says. Proposed dimensions of the structure are: length 560 ft. and width 133 ft. The office and shop building will be two stories high and 67 ft. wide.

Advantages offered by the cantilever design are:

• **Cost.** Erwin and Rongved say construction expenses for their hangar will be comparable to the cost of conventional types.

• **Expansion.** Roof span of the hangar may be increased with special sections, the inner wall of the lean-to knocked out to house 40 x 67-ft. nose docks and pent houses built into the roof to accommodate aircraft fins and rudders of any height.

• **Increased Space.** The hangar is expected to house more aircraft per square foot than any other construction because of unobstructed floor space allowed by the cantilever roof and three open sides.

• **Versatility.** Possible uses of the hangar include any type of aircraft maintenance, overhaul, assembly-line manufacturing overhaul techniques and modification work.

▶ **Production Unit**—If built as a double unit, the hangar could be adapted to disassemble-reassemble production-line overhaul practices used by many large airlines.

Planes would enter one end of the hangar, with engines and accessories removed at successive stations and passed laterally to the lean-to for service. Aircraft would swing around at a covered end of the double hangar, and overhauled components would be reinstalled as the planes moved through assembly stations on the second side.

Free space of the cantilever type would reduce assembly-line stoppage, allowing immediate removal of a unit bogging down the line without disrupting the flow of aircraft through the hangar.

The hangar floor is designed to incorporate radiant heat, which Erwin and Rongved say will reduce heating cost by 6 cents per square foot and improve personal comfort.

Erwin-Newman Co., a Houston, Tex., steel-fabricating firm, has applied for patents on the design.

Models of the hangar recently were exhibited to airlines by Rongved and Erwin.

Engine Temperatures
MEASURED ACCURATELY
with
Thermo Electric THERMOCOUPLES

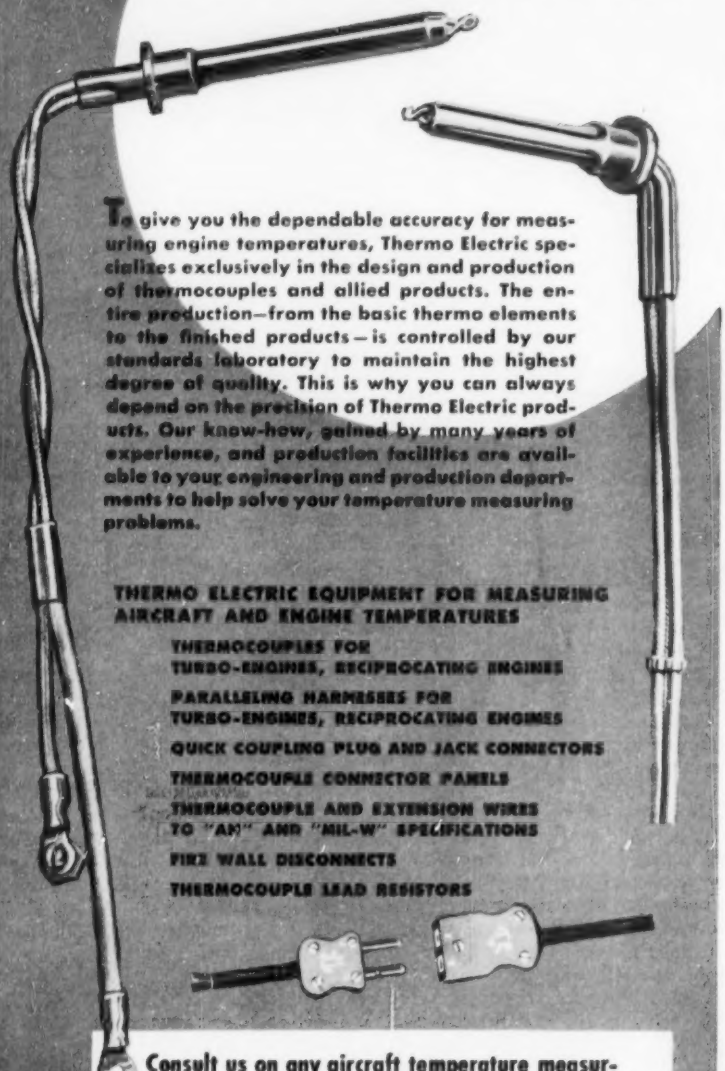

To give you the dependable accuracy for measuring engine temperatures, Thermo Electric specializes exclusively in the design and production of thermocouples and allied products. The entire production—from the basic thermo elements to the finished products—is controlled by our standards laboratory to maintain the highest degree of quality. This is why you can always depend on the precision of Thermo Electric products. Our know-how, gained by many years of experience, and production facilities are available to your engineering and production departments to help solve your temperature measuring problems.

THERMO ELECTRIC EQUIPMENT FOR MEASURING AIRCRAFT AND ENGINE TEMPERATURES

THERMOCOUPLES FOR TURBO-ENGINES, RECIPROCATING ENGINES

PARALLELING HARNESSES FOR TURBO-ENGINES, RECIPROCATING ENGINES

QUICK COUPLING PLUG AND JACK CONNECTORS

THERMOCOUPLE CONNECTOR PANELS

THERMOCOUPLE AND EXTENSION WIRES TO "AN" AND "MIL-W" SPECIFICATIONS

FIRE WALL DISCONNECTS

THERMOCOUPLE LEAD RESISTORS

Consult us on any aircraft temperature measuring problem, or write for complete Catalog C.

Thermo Electric Co., Inc.
FAIR LAWN NEW JERSEY

NEW AVIATION PRODUCTS



Flush Latch

A new flush latch for aircraft, with aerodynamic flushness and high strength, has been placed on market.

Use of aluminum extrusion gives a very small radius of exposed edges, difficult to realize with punch press parts, according to the maker.

For installation, a rectangular slot is cut and a latch bracket fastened with six rivets to the door structure.

The bracket is made of 302 stainless steel sheet stock while 24S-T aluminum extrusions are used for trigger and bolt. Actuating springs are constructed of music wire, cadmium plated to resist rust.

Hartwell Aviation Supply Co., 9035 Venice Blvd., Los Angeles 34.



Lightplane Fuel Pump

A new lightplane fuel pump delivers .067 cu. in. per revolution, giving a rated capacity of from 2 to 30 gpm. at 3,700 rpm. Excess flow of fuel is routed through a relief valve and recirculated internally in the pump.

The one-pound unit, Romec's Model RD-7420-B or AJ, is built for engines up to 250 hp. Fuel delivery pressure is adjustable from 8 to 20 psi. A built-in bypass valve permits passage of fuel through the pump during engine starting or as an emergency source.

Romec Division of Lear, Inc., 110 Ionia Ave., N. W., Grand Rapids 2, Mich.

GET YOUR FREE COPY NOW

of this authoritative, fact-filled bulletin on "What to Consider When Selecting A Metallic Bellows"

What to Consider When Selecting a Metallic Bellows

CLIFFORD

Contains: • **Charts** • **Diagrams** • **Applications** • **Detailed analysis of bellows' construction, materials, flexibility, filling medium, life**

Are there 3, 8, 10 or 14 common types of bellows and methods of attaching end fittings available to you when you consider bellows for the job you have in mind? Is stainless steel, nickel or brass the material most frequently used? What affects the choice of material? How can you double the flexibility and halve the spring rate of a bellows? How can you limit the total pressure generated by a bellows at a specified temperature? What are the advantages of a bellows shaft seal? What determines the motion relationship between two or more bellows when they are connected together?

These and many other questions are answered in the informative bulletin "What to Consider When Selecting A Metallic Bellows," featuring an authoritative article which has appeared in a recent issue of PRODUCT ENGINEERING. Written by engineers at Clifford Manufacturing Company, bulletin contains a wealth of up-to-the-minute data on bellows.

Send for your free copy today. Just mail coupon below.

Clifford Manufacturing Company, Waltham 54, Mass. Div. of Standard-Thomson Corp. Sales offices in New York, Detroit, Chicago, Los Angeles.

CLIFFORD

HYDRAULICALLY-FORMED BELLOWS AND BELLOWS ASSEMBLIES

ALL-ALUMINUM OIL COOLERS FOR AIRCRAFT ENGINES

MAIL COUPON TODAY

CLIFFORD MANUFACTURING COMPANY, 136 Grove Street, Waltham 54, Massachusetts

FREE **Please send me my copy of the bulletin "What to Consider When Selecting a Metallic Bellows." I am interested in the applications checked.**

- ☐ Air conditioning systems
- ☐ Aircraft
- ☐ Carburetor altimeter controls
- ☐ Engine thermostats
- ☐ Gasoline valves
- ☐ High pressure steam devices
- ☐ Heating equipment
- ☐ Instruments
- ☐ Remote or direct control of temperature and pressure
- ☐ Electric or gas ranges
- ☐ Kilns & ovens — industrial
- ☐ Air compressors
- ☐ Oxygen flow indicators
- ☐ Oxygen regulators
- ☐ Process controls
- ☐ Refrigerating systems — commercial
- ☐ Shaft seal assemblies
- ☐ Fuel pumps
- ☐ Fluid couplings
- ☐ Supercharger controls
- ☐ Refrigerator controls — domestic
- ☐ Torque converters
- ☐ Compensating regulators

Other applications .....

Name ..... Title .....

Firm .....

Street .....

City ..... Zone ..... State .....

NEW T-J Spacemaker AIR CYLINDERS

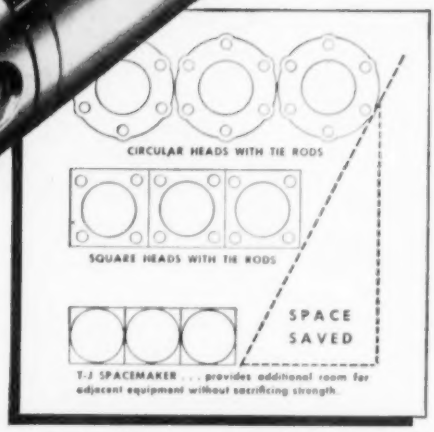
CIRCULAR HEADS WITH TIE RODS
SQUARE HEADS WITH TIE RODS
SPACE SAVED
T-J SPACEMAKER . . . provides additional room for adjacent equipment without sacrificing strength.

- SAVES UP TO 40% SPACE WITH NEW STREAMLINED DESIGN.
- SUPER STRENGTH . . . EXTRA HIGH SAFETY FACTOR.
- SOLID STEEL HEADS.
- HEAVY WALL, PRECISION HONED, HARD CHROME PLATED SEAMLESS STEEL BODY.
- LEAKPROOF CYLINDER HEAD TO BODY CONSTRUCTION.
- RELATIVE PORT POSITIONS MAY BE ROTATED WITHOUT DISASSEMBLY OF CYLINDER AND LOCKED IN DESIRED POSITION.
- HEAVY DUTY, HI- TENSILE, HARD CHROME PLATED PISTON ROD.

Streamlined construction of the new T-J Cylinders *eliminates tie rods . . . reduces head size . . .* and *saves up to 40% in mounting space!* In addition, a new high in strength is achieved with solid steel heads and heavy wall seamless steel body . . . leakproof construction . . . extra high safety factor.

Cylinder walls are precision honed and hard chrome plated for long-life efficiency. Available with the new T-J Super Cushion Flexible Seals which insure positive cushion with automatic valve action for fast return stroke. Many standard sizes and styles . . . both cushioned and non-cushioned . . . for wide range of pushing, pulling, lifting, clamping or control jobs. T-J dependability. *Fast delivery* to meet rush requirements. Write for bulletin 8152. The Tomkins-Johnson Co., Jackson, Mich.

Many More Advanced Features!

37 YEARS EXPERIENCE

T-J TOMKINS-JOHNSON

RIVITORS AIR AND HYDRAULIC CYLINDERS CUTTERS CLINCHORS



Gear Hobbers

World's largest gear hobber, is title claimed for machine developed by David Brown Machine Tools, Ltd., a British firm.

The machine will hob a gear 20 ft. in diameter. Photo shows a smaller Brown gear hobber perched on workpiece table of large machine.

Brown's complete line of gear equipment, including pinion hobbing machines, gear shavers, and spline hobbers, will be handled in this country by Morey Machinery Co., Inc., 410 Broome St., New York 13.

ALSO ON THE MARKET

"Anstac 2-M" is anti-static cleaning solution for aircraft canopies and other plastic areas. Non-flammable and colorless, its use is important where static electricity and dust attraction cannot be tolerated. It is made by Chemical Development Corp., Danvers, Mass.

Aluminum cleaner for use in aircraft and metal plants, composition No. 80-A, is said to provide high degree of safety and efficiency and can be used in soak tanks or pressure-spray washing machines. It is soluble in hot water, rinses in either hot or cold, and does not foam excessively, according to developer, Oakite Products, Inc., 157 Rector St., New York 6.

Rust is removed from steel and alloy steels by a new, free-flowing acid compound Descaler 2A, without the hazards that accompany use of strong sulphuric acid or hydrochloric acid, developer claims. Product gives controlled acid concentration to prevent overpickling, according to Enthone, Inc., 442 Elm St., New Haven, Conn.

Aircraft pipe plugs to specifications AN913 for square heads and AN932 for hexagon countersunk plugs are available in steel, copper alloy, aluminum alloy and magnesium in sizes 1/16 to 2½ in. from U. S. Plug and Fitting Co., Wellington, Ohio.

STAINLESS STEEL BELLOWS ASSEMBLIES

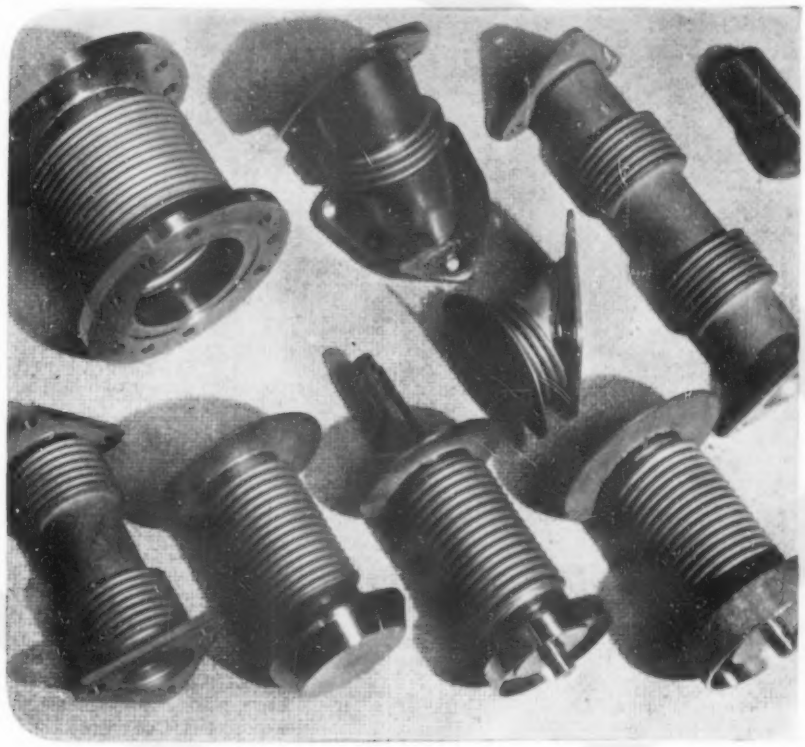

...Designed for YOU to SAVE for you!

● Whatever your requirements for stainless steel bellows assemblies may be, you can be assured of getting *exactly* what you need from Fulton Sylphon or Bridgeport Thermostat.

We design and engineer assemblies to do specific jobs. For example—for use where there's a design problem involving control of temperature or pressure . . . opening and closing of valves, dampers, etc. . . . absorbing expansion . . . providing packless construction . . . for more uses throughout industry.

And add *these* advantages that help make savings for you: Half-a-century of experience in this specialized field . . . skilled personnel . . . complete production facilities . . . ability to produce in any volume. All combine to relieve you of production problems and worries, help save you time and money.

Consult us on your present bellows assemblies requirements—or on any project where an assembly must be designed for your specific needs. Stainless steel or other metals—wide size range. For information, write for idea-filled Catalog CA-1200.

TEMPERATURE CONTROLS

FULTON SYLPHON
DIVISION
Knoxville 4, Tenn.

Robertshaw-Fulton CONTROLS COMPANY

BELLOWS ASSEMBLIES • BELLOWS DEVICES

BRIDGEPORT THERMOSTAT
DIVISION
Bridgeport 1, Conn.

Faith *in the sky*

Just child's play? Yes . . but an interest is being born. First thoughts of flying came to the Wright brothers from a toy that was powered by rubber bands. From their boyish hands, the toy sailed through the air, and as it soared, their thoughts did, too. Today, faith in the sky comes naturally to American youth. It comes naturally to Ostuco, too. Though we are a pioneer in the development of steel tubing, we still have a youthful enthusiasm for new problems and new requirements. As a supplier to more than twenty leading American aircraft manufacturers, we have our sights set high. Our faith, too, is in the sky.

For detailed information on OSTUCO Aircraft Tubing, write for free Booklet A-2 and "Facilities" brochure. Address your nearest OSTUCO Sales Office, or write direct to General Office, Shelby 1, Ohio.

THE OHIO SEAMLESS TUBE COMPANY
Manufacturers and Fabricators of Seamless and Electric Welded Steel Tubing
Plant and General Offices: SHELBY, OHIO

ostuco AIRCRAFT TUBING

SALES OFFICES: Birmingham, P. O. Box 2021 • Chicago, Civic Opera Bldg., 20 N. Wacker Dr. Cleveland, 1328 Citizens Bldg. • Dayton, 511 Salem Ave. • Detroit, 520 W. Eight Mile Road, Ferndale • Houston, 6833 Avenue W, Central Park • Los Angeles, Suite 300-170 So. Beverly Drive, Beverly Hills • Moline, 617 15th St. • New York, 70 East 45th St. • Philadelphia, 1613 Packard Bldg., 15th & Chestnut • Pittsburgh, 1206 Pinewood Drive • St. Louis, 1230 North Main St. • Seattle, 3104 Smith Tower • Syracuse, 2350 Bellevue Ave. • Tulsa, 245 Kennedy Bldg. • Wichita, 622 E. Third St. • *Canadian Representative:* Railway & Power Corp., Ltd.

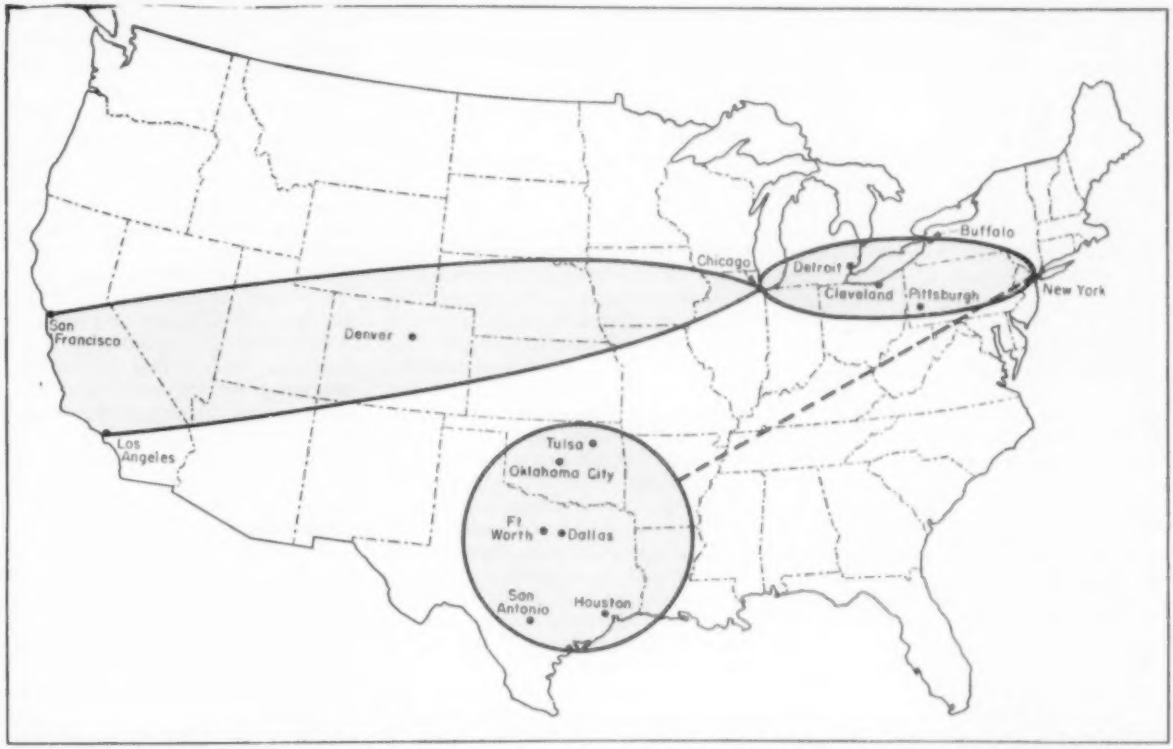

INVOLVED IN ROUTE MONOPOLIES are three general areas shown above: New York-Chicago, including Buffalo, Detroit, Cleveland and Pittsburgh; Chicago-California, covering San Francisco, Los Angeles and Denver; and New York route to Texas and Oklahoma.

Fight Opens on Big 4 'Monopoly' Routes

- **Exclusive runs still held by American, Eastern, TWA and United at stake in three CAB hearings.**
- **Smaller airlines seek Board permission to compete with major carriers on one-line domestic routes.**

By Lee Moore

A battle to break route "monopolies" held by the Big Four airlines is in its opening round, touched off by Civil Aeronautics Board with the start of hearings that may allow smaller carriers to compete on the New York-Chicago, Chicago-California and New York-Oklahoma-Texas runs.

Three members of the Big Four also are fighting among themselves to gain best route segments from each other. Trans World and American Airlines have applied for permission to serve United Air Lines' Denver and San Francisco routes; UAL is after TWA's Pittsburgh-New York shuttle, and TWA is out to break American's hold on the Southwest.

Braniff Airways and Capital Airlines are among the leading applicants for competitive service on the few remaining exclusive routes which are held by American, Eastern Air Lines, TWA and United.

▶ **First Case Scheduled**—The four CAB members have agreed unanimously on immediate scheduling of the New York-Chicago case, including Braniff's 10-year-old application for Chicago-Detroit service on that route.

Scheduling of hearings on Chicago-California and New York-Oklahoma-Texas route applications was planned by the Board two months ago. CAB's crowded docket has been one major obstacle to meeting that hearing schedule, but both may be assigned prehearing conferences soon, the first this winter and the second by the early part of the spring.

▶ **Fifth Board Member**—Indications are that Republican Board members Oswald Ryan and Chan Gurney do not wish to schedule the two vital route cases until after President Eisenhower appoints a fifth CAB member and designates a chairman.

Appointment of a fifth member was expected momentarily as of last week. Gurney told AVIATION WEEK a month ago he had not asked the White House to speed the CAB appointment, because Mr. Eisenhower would have more important decisions to make. But Gurney indicated last week it is apparent now that important CAB cases will remain deadlocked until the Board is filled out by a fifth member.

▶ **Board Split**—Although Board members and chief examiner Francis Brown are tight-lipped on the question of timing and exact outline of plans for route hearings, AVIATION WEEK learned that Democrats Josh Lee and Joseph Adams want early hearings. Gurney goes along with their efforts, but he leaves timing

up to the chief examiner. Ryan probably would prefer delay.

Gurney said scheduling of cases generally is up to the chief examiner unless the Board sets a definite priority of case hearings. But he refused to reveal CAB's instructions for hearings on the three routes.

▶ **Examiner's Discretion**—Chief examiner Brown indicated that scheduling of the route cases now is up to him.

"As soon as examiners are available and the Bureau of Air Operations staff can report its readiness to testify, the examiners will put the route cases down for hearing," he said.

Brown could proceed rapidly with the area route-case program the Board laid down for him in late 1952, assigning it priority over other CAB hearings. He also could interpret the apparent hesitancy of the Board to press the two cases as nullifying earlier instructions to expedite them.

▶ **New York-Chicago**—The free-for-all got underway last week at a prehearing conference, where at least eight trunk lines pressed old applications and introduced new ones for practically every combination of routes from New York through major industrial cities on the Chicago route. Capital Airlines appears to some Washington observers as the greatest potential gainer in this case, and American is the most likely to suffer increased competition.

Main routes that one or more applicants may be granted by CAB in this case are:

• **New York-Buffalo.** This American Airlines route is the biggest single target of the case. Passenger-miles in the 1950 official survey (latest available) ranked 35th among all city pairs in the country. Capital, Colonial, Northwest and United are among carriers seeking to compete with American on the same route.

• **Syracuse, Rochester and Buffalo.** American has exclusive rights to serve New York, Detroit and Chicago from all three of these cities. New York-Buffalo service is the prize, but Capital will fight hard for rights on the other routes.

• **New York-Pittsburgh.** TWA has exclusive rights to unrestricted service between these points. Capital, United, and Chicago & Southern are among the applicants. C&S and United could compete only through extension of present routes.

• **New York-Detroit.** American also has an exclusive franchise on unrestricted service to this route, although several other lines serve parts of it.

• **New York-Cleveland.** CAB has separated this case as the New York-Cleveland nonstop case. United has exclusive certificated rights to unrestricted service. But Capital has similar rights granted by special CAB exemption and is considered certain of formal Board certification in this case. CAB gave the route to Capital in 1950. Northwest failed to ask consolidation of a similar application at the time but later got the courts to rescind Capital's award on grounds that CAB should have included Northwest in the case automatically. Applicants in the current case also include American and TWA.

• **New York-Chicago.** Braniff and Delta have long sought rights to enter New York. But the Board limited this case to routes terminating at Chicago and New York. Braniff and Delta may have a better chance for through service to New York in the Texas-Oklahoma case.

▶ **Chicago-California**—This will be a battle of transcontinental carriers American, TWA and United. Seniority of the case stems basically from TWA's 1945 application for Denver as an intermediate stop on its transcontinental routes through St. Louis to Los Angeles, plus nonstop flights from Denver to San Francisco.

TWA is adding an application for nonstop Chicago-Denver rights to this application, making the Trans World application heavily competitive with United's exclusive rights to east and west service from Denver.

American Airlines, prompted by United's attack on high-density coach policies, recently asked CAB for unrestricted rights to compete with UAL and TWA on Chicago-San Francisco service.

In the New York-Chicago case that went to prehearing conference last week, United asked CAB to add Pittsburgh to its Denver-Chicago-New York route. This makes TWA's Denver application and United's Pittsburgh petition identical route requests, in effect.

▶ **New York-Oklahoma-Texas** – Tulsa, Oklahoma City, Dallas, Ft. Worth and Houston are chief targets in this case. Bitter fights can be expected, and the case may be long delayed through its impinging on the northeast-southeast route system. Many airline rivalries will be involved. The exceptional pride of southwestern states and cities in their air-service status can be expected to bring heavy congressional pressure on CAB to grant competitive service.

Part of this case's seniority stems from a TWA application in 1946 to serve Tulsa and Oklahoma on its transcontinental routes. American is the only carrier into these two cities from the East and West Coasts.

Braniff has a two-year-old application to extend its Texas-Oklahoma system northeast to Pittsburgh, Washington and New York. It would bring competitive service to Eastern's New York-Houston and American's New York-Dallas monopolies, as well as Tulsa and Oklahoma City.

Other applicants include Delta, which will vie with Braniff for a New York route. Delta's application and similar petitions will involve the eastern north-south route pattern. The Board may have a hard time deciding how to limit this case without rejecting vigorously pressed applications of eastern operators.

FIRST CIVIL TURBO-COMPOUND SUPER CONNIE

Minus propellers and other gear, the first commercial version of the Super Constellation to be powered by Wright Turbo-Compound engines is shown being transferred from final assembly to another Lockheed hangar where it will be fitted out with all the trimmings. This model Super Connie will fly 59 first-class passengers or 99 tourists, and orders have been placed by a dozen airlines to the extent of $100 million. Cruise speed will be approximately 350 mph., maximum speed 400 mph. Lockheed has been flight testing a Turbo-Compound-powered Super Connie for Navy, the R7V-1.

Canada Licenses Two U. S. Carriers

Two American charter airlines have been licensed by the Canadian Air Transport Board to carry payloads from certain points in the United States to Canada:

• **Vincent Astor** of New York may fly a load of from 1,100 to 6,000 lb. per plane from Teterboro, N. J., airport to any point in the Canadian provinces and Labrador.

• **Aero-Ways, Inc.**, aircraft are allowed to carry up to 6,000 lb. each from the airline's home base at Cleveland to Toronto, London (Ontario), North Bay and Ottawa.

Enforcement Action On UAL Coach Begins

Civil Aeronautics Board members told United Air Lines attorneys last week that CAB is starting enforcement action against United for offering first-class service at coach fares in violation of its tariff.

The Board last Tuesday suspended a new United tariff that proposed the lower-capacity service at coach fares, contrary to CAB policy. The Board told United attorneys it would start enforcement within the week unless UAL complied with the seating terms of its existing tariff or filed a new tariff complying with CAB policy.

CAB says UAL has been violating its existing coach tariff since last Nov. 21 when United president W. A. Patterson ordered his airline to stop selling more than 54 seats on his 66-seat DC-4 coach, although his tariff stipulated a minimum availability of 66 passengers in the plane to justify the low coach fare.

In suspending the new United tariff proposal to continue this low-density seating, the Board said it would be unfair competition since other carriers are abiding by Board policy requiring greater passenger loads.

The Board also said that such United competition would force other lines to reduce their loads, thereby forcing a general increase in fares.

Enforcement procedures open to the Board:

- CAB can start criminal or civil action in a U. S. district court. In a criminal proceeding, the Board could seek penalties of from $100 to $5,000 per individual violation of the tariff. In a civil proceeding, the Board could ask the court to issue an injunction to prevent further violation.
- Or the Board can content itself with a formal proceeding of its own, involving oral arguments between the CAB Enforcement Section and United Air Lines before the CAB members.

United recently cut its DC-4 coach capacity from 66 seats to 54, charging that the high-density-seating standards of CAB are unsafe for emergency evacuation.

▶**CAB View**—But CAB officials consider coach seating of some other lines considerably safer than United's new standard. They point to Eastern's 68-seat, 10-exit plane, which has one exit for every seven passengers; United's new 54-seat, six-exit standard provides that there will be one exit for every nine passengers.

United, in a rebuttal to Eastern's formal complaint challenging UAL's sincerity in the coach safety controversy, argued that Eastern's 67% increase in the number of exits did not necessarily make the plane safer for emergency evacuation.

For instance, if the extra exits are blocked off by fire, United said, "evacuation times increase with increases in number of passengers" (AVIATION WEEK Feb. 2, p. 12). A CAB official counters this by pointing out that the same eventuality that might shut off six of Eastern's exits could shut off six of United. "Then under United's own hypothesis," he says, "Eastern's passengers would still have four exits left while United's passengers would have no exits at all."

Illustrating the same point, the CAB official poses the occasional situation of having one side of a plane blocked off in a crash. Eastern's 68 passengers would still have five exits, or one for each 13½ passengers. United's 54 passengers would have three exits, or one exit per 18 passengers. Eastern's exit availability thus would be 33% greater than United's, he argues.

More exits and better cabin crew training have been recommended by the Air Line Pilots Assn. for emergency evacuation. ALPA agrees with the Air-line Stewards and Stewardesses Assn. that there should be two flight attendants on a coach or any plane carrying more than 40 passengers.

▶**Passenger Comfort**—In the meantime, safety experts are debating another

DESIGN
ENGINEERS
AND
DRAFTSMEN

With Experience on Airframes, Equipment Instrumentation, Hydraulics & Structures

ALSO

TOOL DESIGNERS and PLANNERS
LOFTSMEN
DESIGN CHECKERS

With Aircraft Experience

• This is a long-term program featuring the design and development of advanced JET AIRCRAFT, offering recognition of ability and opportunity to advance. Top salaries. Air-conditioned offices. Ideal suburban living conditions.

KAISER METAL PRODUCTS, Inc.
Radcliffe St. Bristol, Pa.

HAVE YOU SEEN

Our 60 page pocket size booklet —

AND

19 minute, 16 MM motion picture in color and sound —

ON THE *hi-shear* RIVETING PROCESS

For riveters, inspectors, structure and tooling designers, training supervisors and trade schools.

Key points of the HI-SHEAR process in the booklet and film are presented in a non-technical style and include:

- How and why HI-SHEARS are used.
- Hole preparation.
- Rivet installation and removal.
- Inspection and trouble shooting.
- Safety points.
- Styles, sizes and identification.

Write for your copy of this very useful booklet. Ask for folder and details on showings of this motion picture at your Company.

Remember, HI-SHEARS save WEIGHT • SPACE • TIME

U. S. and foreign patents — Trademark registered.

THE *hi-shear* RIVET TOOL CO.
8924 BELLANCA AVENUE
LOS ANGELES, CALIF.

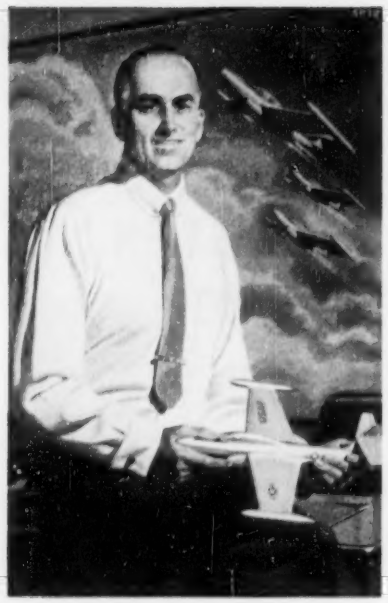

ENGINEERS
AND
SCIENTISTS

You are invited to write regarding long-range projects at Northrop Aircraft, Inc. Exceptional opportunities now exist to join the company's engineering and scientific staff. If qualified, you may select important developmental work, or equally vital production engineering.

Example of positions open are:

BOUNDARY LAYER RESEARCH SCIENTISTS
ELECTRONIC PROJECT ENGINEERS
ELECTRONIC INSTRUMENTATION ENGINEERS
RADAR ENGINEERS
FLIGHT-TEST ENGINEERS
STRESS ENGINEERS
AERO- AND THERMODYNAMICISTS
SERVO-MECHANISTS
POWER-PLANT INSTALLATION DESIGNERS
STRUCTURAL DESIGNERS
ELECTRO-MECHANICAL DESIGNERS
ELECTRICAL INSTALLATION DESIGNERS
ENGINEERING DRAWING CHECKERS

Qualified engineers and scientists who wish to locate permanently in Southern California are invited to write for further information regarding these interesting, long-range positions. Include an outline of your experience and training. Allowance for travel expenses.

Address correspondence to

Director of Engineering,
Northrop Aircraft, Inc.
1003 E. Broadway, Hawthorne, Calif.

coach-seating question: For any given number of passengers, is evacuation smoother with five-abreast seating allowing full leg room or four-abreast seating with less leg room?

The same question applies to passenger comfort. American Airlines fits eight more paying passengers into its five-abreast, 80-seat DC-6 coach than United's planned 72-seat transport. But American claims its full 40-in., first-class leg room offsets the comfort advantage of United's four-abreast seating plan, which provides only 35 in. between seats.

On window location, the disadvantages of each system about balance. Alteration of the seat interval in a four-abreast coach causes unconventional window location in reference to the seats. In a five-abreast coach the middle-row passengers have poor window visibility.

As airlines and manufacturers gain experience, they may be expected to design more comfort into coach seating.

CAA Seeks $45-Million Aid Fund

Special expenditure asked for buildup of navigation and traffic control aids on military, civil airports.

Civil Aeronautics Administration leaders are seeking a special high-priority expenditure of $45 million over the next three years to complete installation of navigation and traffic-control aids under the proposed U.S. common system for civil and military aviation users, a tentative new CAA program disclosed last week.

CAA also will ask additional appropriations for the Air Navigation and Development Board to finance an accelerated research program on new aids at an annual $11-million level.

The new administration program, which details ways in which CAA proposes to implement the recent recommendations of the Truman Administration's Special Airport Commission, is being circulated to U. S. aviation and airline industries

Return comments are asked by Feb. 15, after which the proposed program and revisions will go to Commerce Secretary Sinclair Weeks for final action.

▶ **Long-Range Program**—The proposed special expenditures would be sought under recommendation by the commission for acceleration of "research and development programs and installation projects designed to improve aids to navigation and traffic control in the vicinity of airports, especially in congested areas." The recommendation says installation and adequate manning of radar traffic control systems should be given high priority.

Explaining plans to put this recommendation into effect, the tentative program says CAA will request funds to accelerate installation of air navigation aids. The administration estimates that approximately $45 million is required for the three-year period ending July 30, 1955, to accelerate the program for meeting the immediate objective of CAA's portion of the common system.

For ANDB's long-range program, "future appropriations at an annual level of approximately $11 million will be required," the program says.

The proposed new program endorses virtually 100% of recommendations made by the special commission. Members of the commission included CAA administrator Charles F. Horne, chairman James Doolittle and Jerome C. Hunsaker, chairman of the National Advisory Committee for Aeronautics.

▶ **New Airport Requirements**—To implement the commission's proposal for airport runway extensions and zonings, CAA offers to set up mandatory requirements for new airports as part of grant agreements for federal participation in local financing of the fields.

Requirements would provide for:

- Cleared runway-extension areas at least a half-mile long and 1,000 ft. wide, free from housing or other obstacles at each end of the dominant runway for all new airports of feeder size or larger.
- Fan-shaped zoning beyond each runway extension at least two miles long and 6,000 ft. wide at the outer limit. Height of buildings and use of land would be controlled to prevent construction of public assembly places and to restrict construction of residences to "more distant locations" within the zones.

CAA said the runway extension is primarily for safety of persons on the ground. The extensions are not overrun areas for runways; areas will not be graded except for removing obstructions; and building restrictions do not apply to air navigation aids that may be installed on extensions.

For existing airports, cities should go "as far as practical" in clearing areas and zoning runway approaches, EAA said.

New constructions should not be permitted on runway extensions, and objectionable structures should be removed wherever possible. Operating procedures should be designed to minimize hazard and nuisance to persons in the vicinity.

▶ **Raise Ceilings**—The commission's

held that ceiling and visibility minimums under which aircraft are permitted to circle or maneuver in congested terminal areas should be raised by utilization of existing radio navigation aids.

CAA proposes to reduce the number of circling approaches by setting up additional radio navigation aids to provide additional straight-in instrument approach procedures.

The commission also offers to raise minimums at airports where safety considerations warrant, after re-evaluation. The commission found straight-in approach minimums were adequate.

Other implementation proposed by CAA from the airport commission's findings:

- Work with the National Institute of Municipal Law Officers to revise airport zoning model ordinances and in preparing test cases on constitutionality of airport zoning.
- Seek revisions of Civil Air Regulations for more flight-crew training; encourage use of flight simulators and group acquisition of simulators by air carriers.
- As equipment becomes available, review the degree of positive air traffic control desirable in each high-density traffic area. Full positive control in high density is the ultimate long-range objective, providing due consideration for all users.
- Conduct flight tests to establish a crosswind component of 30 mph. for Convair 340, Lockheed 649, 749 and Martin 2-0-2 airplanes; carry out research in cooperation with industry to determine maximum allowable crosswind components in adverse runway conditions, including ice.
- Encourage installation of special crosswind gear on transport aircraft, and continue policy of single-runway or parallel systems.
- Continue annual studies of community-airport requirements and runway lengths; available data indicates that 8,400-ft. standard runway length for transcontinental or intercontinental airports will suffice for a substantial number of years.
- Carry out programs to minimize noise at airports, install acoustical gear in runup areas and teststands; reduce noise nuisance of airplanes in approach and departure procedures through pilot instruction and training; arrange patterns to avoid unnecessary flight over thickly settled areas but only within safe flight limits; train crews away from residential areas; make test flights away from builtup areas; separate military and civil flying at congested airports by developing a list of airports by categories of exclusive use and joint civil-military use.
- Encourage helicopter development for shuttle and short-haul use—emphasizing safety, reliability and public ac-

Northrop's Prime Equation

Northrop *boundary-layer research scientists,* like the man above, are concerned with complex problems aimed at achieving the maximum efficiency in aerodynamic surfaces at high speed.

Equations are used to solve problems. At Northrop Aircraft, the prime equation combines teams of administrators, outstanding scientists and production specialists with modern industrial and research facilities. The combination efficiently converts imagination and knowledge into actual matériel of advanced design and incalculable value.

NORTHROP AIRCRAFT, INC.
HAWTHORNE, CALIFORNIA
Pioneer Builders of Night and All Weather Fighters BA12

ceptance. This is to be done through pushing certification for transport-type copters and operating copters and through pushing development of heliports and special landing areas at airports.

• Encourage maximum use of "fail-safe" devices and further research in this field.

• Encourage simplification of airplane design wherever feasible.

• Work with the Aero Medical Assn. in a study of pilot aging and allied problems.

• Secure funds to add more CAA inspectors, and increase emphasis on supervision of aircraft maintenance, operating and training.

• Consider relocation of airway facilities where practicable to reduce flying over thickly settled areas. Locate new installations to avoid noise nuisance and flight hazards.

• Promote use of radar control, including surveillance radar and airborne anti-collision radar.

• Encourage use of airborne and ground recording devices.

• Expedite development of a miniaturized distance-measuring equipment, and work for airborne omnirange and DME in all instrument-flying aircraft.

Heacock Resigns As ACTA President

Amos Heacock, president of the non-scheduled airlines' Air Coach Transport Assn. since its founding more than two years ago, has resigned to resume full-time attention to his own airline business. The board of directors met last week to discuss appointment of a successor who can give undivided attention to ACTA affairs, as urged by Heacock at the general meeting last year.

An ACTA official said Heacock resigned now to hasten selection of a successor. Heacock will remain on the board.

He also is president of the Seattle-Alaska nonsked, Air Transport Associates, Inc. He served as president of ACTA without salary.

His airline faces revocation of its operating rights by Civil Aeronautics Board this year unless the Supreme Court reviews Heacock's appeal of the CAB order (AVIATION WEEK Feb. 2, p. 90).

Heacock has been an outspoken critic and a relentless challenger of CAB policies forbidding nonsked competition with scheduled airline operations.

QUESTION:

If The Answer Is YES—

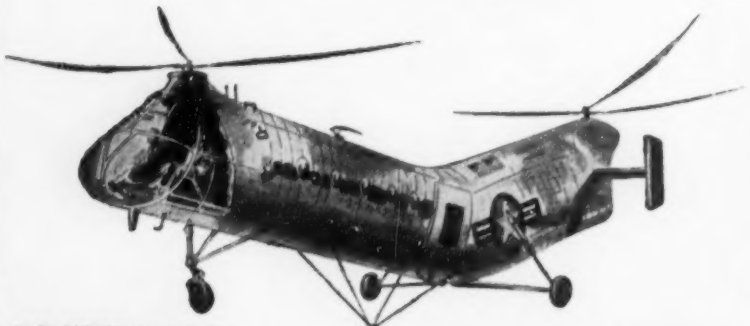

DO YOU want to work for the Pioneer Builder of TRANSPORT HELICOPTERS

If you want to keep your feet on the ground working on up-in-the-air transport ideas write now to—

W. J. Hatcher
Employment Manager

PIASECKI
(Pronounced PIE-SEK-EE)
IS THE PLACE TO WORK!

Modern, new plant . . . estate like, suburban surrounding . . . the most liberal pension plan in the industry-PLUS-opportunity unlimited to grow in income and responsibility in a field of transport helicopters whose own growth opportunity in the post-war world will be limited only by the IMAGINEERING ABILITY of men like yourself who, by education and experience can qualify for our present openings as—

ENGINEERING DESIGNERS & DRAFTSMEN

—with aircraft background on Airframes, Controls, Electrical & Power Plant Installation.

PIASECKI HELICOPTER CORP.
Morton, Pa. — A Philadelphia Suburb — Near Swarthmore

WHERE TO BUY

NEW EQUIPMENT — ACCESSORIES
MATERIALS
SERVICES AND SUPPLIES

Which casting will serve YOU best?

NON-GRAN SAND CASTING	NON-GRAN CENTRIFUGAL
	

Send your prints for prompt quotation.

American Non-Gran Bronze Co.
Berwyn, Pa.

NON-GRAN

CHEMICAL ENGINEER

with experience in development, testing and control of

METAL HONEYCOMB STRUCTURES AND ASSEMBLIES

Our work will have civilian product as well as airframe applications.

This position will provide an opportunity to broaden your experience in rubber and plastic product development and research.

First line company located in Midwest.

Send complete resume to

P-6798, Aviation Week
520 No. Michigan Ave., Chicago 11, Ill.

FORMER

EASTERN AIRLINES DOUGLAS DC-3S

AVAILABLE FOR LEASE

We have available for immediate lease to corporations and airlines DC-3 Passenger and Cargo Airplanes. These aircraft are fully equipped for scheduled airline operation. Executive versions also available. Call on us for more information on the advantages of leasing. We can give you all the advantages of ownership without large capital expenditure. Let us show you the advantage of our corporate leasing plan. Our 20 years of aviation knowledge is at your disposal. Airplanes available for inspection at our Fort Wayne or Miami, Fla., base. Available with Wright or P & W engines.

BRANCH:
Miami, Fla.
P. O. Box 215

EXECUTIVE AIR INC
BAER FIELD • FORT WAYNE, INDIANA
PHONE [illegible]
Subsidiary of Leeward Aeronautical Service

MIAMI
Phone
64-4364

WANTED

SALES ENGINEER

We are manufacturers of aircraft flared tube fittings, reusable hose fittings and Air Corps approved hose assemblies and have an excellent opportunity for graduate engineer who is sales minded to head Sales Department of Aircraft Division.

Submit in detail resume of background and schooling and all pertinent information regarding experience to:

V. L. GRAF COMPANY
Romeo, Michigan

PROJECT ENGINEER-PILOT

Engineer experienced in development and design of autopilots and flight instruments. Must be qualified pilot with sufficient jet time to do instrument test flying in fighter type aircraft. Exceptional opportunity for an aggressive young engineer who wishes to combine project engineering with experimental flight testing. Liberal insurance coverage and flight bonus plan.

LEAR, INCORPORATED
110 Ionia, N.W. Grand Rapids, Mich.

WANTED

Pilots - Mechanics

Experienced on Bell Helicopters

For survey operation in Alaska, families included. High wages—bonuses—expenses paid. Pilots must have 200 hours in Bell Helicopters. Mechanics must have 1 year experience on Bell Helicopters. Employment contracts granted. Our firm in operation 5 years is largest in the business and entirely reliable. After summer in Alaska equipment is moved to California for year round operation. Employment permanent for those qualified. Opportunities for advancement.

RICK HELICOPTERS, INC.
13440 S. Central Ave., Los Angeles 59, Calif.
Phone: Nevada 6-1865

SKILLED

PILOTS

AVAILABLE
No Fee to Employers
PILOTS EMPLOYMENT AGENCY
Teterboro (N. J.) Airport
Hasbrouck Heights - 8-1001

REPLIES (Box No.): Address to office nearest you
NEW YORK: 330 W. 42nd St. (36)
CHICAGO: 520 N. Michigan Ave. (11)
SAN FRANCISCO: 68 Post St. (4)

POSITIONS WANTED

AIRLINE TRANSPORT Pilot, 14 yrs. continuous flying, 6800 hrs., 2,000 hrs. 4 eng., 2800 twin eng., 2000 single eng., 700 inst., 1500 night. Age 33, married, steady and dependable. Foreign and Domestic experience. Executive pilot position desired. PW-6525, Aviation Week.

AIRLINE CAPTAIN, college education, fifteen years experience in all phases of civilian aviation, desires position as airport manager, executive pilot or flight school operator. PW-6355, Aviation Week.

PILOT OR Co-Pilot, Airline & amphibian exper. All ratings including A&E. College grad., family man, domestic or foreign. Available two wks. notice. Presently employed flying. PW-6480, Aviation Week.

FOR SALE

Executive Transport Aircraft
For complete market report of available multi-engine aircraft, including Beech, Convair, Curtis, Douglas, Grumman and Lockheed manufacture, write or call William C. Wold Associates, 516 Fifth Avenue, New York 18, N. Y. Telephone MUrray Hill 7-2650.

DC2-Cargo Aircraft
Excellent for Spray or Duster. $10,000 as is or $22,000 licensed for cargo with zero time engines. C47-Custom conversion. All bulletins and 8000 hr insp. complete, zero time P&W engines 92 or 90D. Price $65,000, available at slight extra cost 94 or 75 engines. Price does not include, radio, heat system or cabin interior —Bill Eddy, 2324 Prospect St., LaJolla, Calif.

LOCKHEED LODESTAR

Model 18-56

Wright 1820-60-205A Engines

Engine & Prop Times	336
Total Airframe Time	2107
Total Time Since Airframe Major	450

DeLuxe Panel, Firewall Shutoffr., Firewarning System, Sealed Tanks, Dual ADF, ARC-1 VHF Transrec'r., New Executive Interior.
Immediate Delivery
$85,000.00

J. A. EDDY, Owner
San Antonio, Texas Travis 5061

JOHN S. HAMMOND, INC.
Greenwich, Connecticut

Attention
ENGINEERS and MECHANICS
Just off the press

DESIGN MANUAL
FOR THE REPAIR OF
ALUMINUM ALLOY STRUCTURES

200 pp.—Fully illustrated
Most complete book of its kind
Price $3.50 postpaid
No C. O. D.'s. Send Check or M. O.
JOHNSON RESEARCH CORP.
Dept. 23, Bethpage, L. I., N. Y.

Aircraft-Delivery
International—Domestic
A.T.R. Pilots—Crews Bonded
Experienced—Efficient
Call — Write — Wire
THE POLARIS CORPORATION
410 Easton Bldg. Oakland 12, Calif.
Ph-TWoaks 3-8695

We desire personnel of the highest caliber—experienced in the field of airborne automatic electro-mechanical control equipment.

★

ENGINEERS

MECHANICAL DESIGN
ELECTRONIC
SERVO

DESIGNERS-LAYOUT MEN

ELECTRONIC
MECHANICAL

This work deals with the manufacture and development of highly complex equipment of the most advanced type in a new and expanding division of an established firm with 20 years of successful experience in the precision instrument field.

We cite a few of the good reasons why you might like to join our organization . . .

SALARY increases are based on merit and initiative—two weeks VACATION. HOSPITALIZATION BENEFITS. GM'S own INSURANCE PLAN—POSITIONS ARE PERMANENT due to long range manufacturing and developing programs—EXPENSES incident to interviews and moving all absorbed by company—HOUSING and LIVING CONDITIONS among the best and finest of any along Lake Michigan.

- We have a Junior Engineering Training Program of one year for inexperienced engineering graduates. Opportunity to become acquainted with all phases of industry.
- For the convenience and direct use of engineers in our Engineering Department, we have our own model shop where highest skilled mechanics are employed.
- Educational opportunities for advanced degrees available at U. of W., Marquette, Technical engineering offered at Milwaukee Vocational School.

. . . all inquiries answered—write or apply . . .

★ *AC SPARK PLUG DIVISION*

GENERAL MOTORS CORPORATION

1025 E. KENILWORTH PL. MILWAUKEE 2, WIS.

ELECTRONICS ENGINEERS WANTED SOUTHERN CALIFORNIA

Attractive opportunities offered to Engineers experienced in and qualified to design aircraft flush antennas and radomes.

Complete modern facilities for laboratory testing and evaluation available.

Salary dependent upon experience and ability.

Contact Mr. J. C. Buckwalter.
Chief Engineer

DOUGLAS

DOUGLAS AIRCRAFT COMPANY, Inc.
Long Beach, California

Engineers and OTHER TECHNICAL PERSONNEL *Needed*

DALLAS TEXAS

AERODYNAMICS	CONTROLS
POWER PLANT	WEIGHT CONTROL
ELECTRONICS	LIAISON
STRESS ANALYSTS	MECHANICAL
SERVO MECHANISMS	MATERIAL PROCESS
STRUCTURES	LOFTSMEN

ENGINEERING PERSONNEL SUPERVISOR
DRAFTSMEN

HOUSING AVAILABLE · TRAINING FACILITIES · PENSION PLAN
PAID VACATION & HOLIDAYS · GROUP INSURANCE
EXCELLENT WORKING CONDITIONS

ATTENTION ENGINEERING PERSONNEL

E-M-C AIRCRAFT CORPORATION

BOX 6191
DALLAS
TEXAS

KEY DESIGN POSITIONS *for* ENGINEERS *AT* Hayes *IN*

HEATING AND VENTILATING
POWER PLANT
HYDRAULIC
ELECTRICAL AND RADIO

FOR MEN WITH AIRCRAFT EXPERIENCE
ALSO
POSITIONS OPEN FOR TECHNICAL WRITERS AND ILLUSTRATORS.

Reply to Executive Engineer

HAYES AIRCRAFT CORPORATION
Birmingham, Alabama

Men of Vision

SCIENTISTS
ENGINEERS
DESIGNERS

apply CREATIVE engineering to research, development, and design . . . the KEY to SOLID SUCCESS at

GOODYEAR AIRCRAFT

If you are seeking a position where ingenuity, personal initiative, and ability count most, investigate the various opportunities offered by Goodyear Aircraft. We have openings for able, experienced personnel in the following fields:

- Electrical Systems
- Circuit Analysis
- Analog Computers
- Servomechanisms
- Test Equipment
- Applied Mathematics
- Electronics
- Aerodynamics
- Physics
- Flight Test
- Stress Analysis
- Dynamics
- Microwave
- Structures
- Designing in All Fields
- Tool Design
- Tool Planning
- Tool Processing
- Industrial Engineering
- Estimation
- Time Study
- Plant Engineering

Openings also exist for welding, civil, and mechanical engineers with experience in metals fabrication. Needed too are personnel with ability and experience in technical editing, copywriting, illustration, and photography.

Positions are available at several levels; inquiries are also invited from recent graduates. Liberal salaries are based on education, ability, and experience. Paid vacations and holidays, sick leave, insurance, and retirement plans are added benefits.

Goodyear Aircraft is centrally located in the Great Lakes region . . . in the heart of northeastern Ohio. Akron, a community of 350,000, is a clean and friendly home town to thousands of Goodyear employees and their families who enjoy metropolitan living and fine cultural and educational advantages. Excellent parks, golf courses, and inland lakes give active, year-round enjoyment. The Aircraft division is a full-fledged member of the Goodyear family . . . a name famous the world over.

If YOU are interested in a secure future, write and give full details to
Mr. C. G. Jones, Salary Personnel Department

GOODYEAR AIRCRAFT CORPORATION • 1210 Massillon Road, Akron 15, Ohio

DIGITAL COMPUTER ANALYSTS

Immediate positions are open for qualified engineers and mathematicians experienced in the application of engineering and research problems to IBM punched-card machines and large-scale digital calculators.

This work is associated with the analysis, design, and development of aircraft gas-turbine, ramjet, and nuclear power plants; airplanes; propellers and helicopters.

For application form and descriptive material, write to Administrative Engineer.

RESEARCH DEPARTMENT
UNITED AIRCRAFT CORPORATION
400 South Main Street
EAST HARTFORD 8, CONNECTICUT

ENGINEERS!

New Aircraft Projects
AT
RYAN

SAN DIEGO
OPENINGS FOR

- Aerodynamicists
- Airframe Designers
- Stress Analysts
- Power Plant Engineers
- Draftsmen

Work will be on new Ryan aircraft projects

Replies to Director of Engineering will be held in strict confidence.

RYAN
AERONAUTICAL COMPANY
San Diego 12, California

YOUNG ENGINEERS
WANTED

Recent graduates from engineering colleges in Aeronautical, Mechanical, or Electrical Engineering. After a training course at our factory we will locate men in Dallas, Texas, and Los Angeles, California. Prefer men 25 to 30 years of age.

If you are interested in making connections with a company which is geared to war or peace conditions and which has plans for a long-range program independent of Government defense appropriations, we can offer qualified men an excellent future.

P6741 Aviation Week
330 W. 42 St. New York 36, N. Y.

California Opportunity

For Acoustics and Vibration Engineers

To conduct tests and analyze problems in acoustics and vibration fields related to aircraft and associated products.

FOR FLIGHT TEST ENGINEERS

To engage in planning, testing and analyzing flight test data obtained on Douglas prototype commercial and military aircraft.

Salary open and dependent on experience and ability.

Contact Mr. W. H. P. Drummond, 3000 Ocean Park Boulevard, Santa Monica, California. Phone: Exbrook 4-3241, Extension 339.

DOUGLAS, AIRCRAFT COMPANY, Inc.
SANTA MONICA, CALIFORNIA

ROTARY WING AIRCRAFT

PROJECT ENGINEER—Blade Design
AERODYNAMICISTS—Senior & Junior
STRESS ANALYSTS—Senior & Junior

Other Personnel With General Rotary Wing Experience
Challenging New High Speed Aircraft
Long Range C.A.A. Program
Liberal Employe Benefits

Apply Personnel Dept.
JACOBS AIRCRAFT ENGINE COMPANY
750 Queen St. Pottstown, Pa.
Phone Pottstown 3000

DRAFTSMEN

LOOKING FOR OPPORTUNITY
PERMANENCY • PROGRESS

Apply
KELLETT AIRCRAFT CORPORATION
Central Airport,
Camden, N. J. Box 468
OR
write Chief Engineer

AIRCRAFT
STRESS PROJECT ENGINEER
FOR OUR JET FIGHTER PROGRAM

Immediate supervisory opening is available for graduate engineer or equivalent with minimum of five years recent aircraft experience.

This position offers opportunity for advancement in several lines of engineering—excellent working conditions and many employe benefits.

MIDWESTERN LOCATION

SEND NOW—full details of your experience and personal data to

P-6746, Aviation Week
330 W. 42 St., New York 36, N. Y.

OPPORTUNITY
FOR
HYDRAULICS ENGINEER
IN
TULSA, OKLAHOMA

Qualified to Design
and Analyze Aircraft
High Pressure Hydraulics
Systems and Components

Administrative Abilities Desired

Salary Open and Dependent
Upon Experience and
Ability

Direct Inquiry to

J. L. JOHNSON
Engineering Personnel Manager

DOUGLAS

DOUGLAS AIRCRAFT COMPANY, Inc.
Tulsa Division
TULSA, OKLAHOMA

AIRCRAFT INDUSTRIAL ENGINEER
Staff position open for well qualified person with experience in aircraft.

P-6581, Aviation Week
330 W. 42 St., New York 36, N. Y.

A REAL OPPORTUNITY
for
FLIGHT RESEARCH CHIEF ENGINEER

A leading East Coast manufacturer of airborne electronics equipment has an opening for a Flight Research Chief Engineer.

If you have an engineering degree, at least 2,000 hours in multi-engine aircraft, a skill and desire for instrument flying and the right personality, we have a real opportunity available.

Please send resume of experience to:

P-6729, Aviation Week
330 W. 42 St., New York 36, N. Y.

SPECIAL OPPORTUNITIES FOR
SENIOR ENGINEERS

Convair in beautiful, sunshiny San Diego invites you to join an "engineers" engineering department. Interesting, challenging, essential long-range projects in commercial aircraft, military aircraft, missiles, engineering research and electronics development. Positions open in these specialized fields:

Electrical Design	Servo-mechanisms
Mechanical Design	Aerodynamics
Structural Design	Thermodynamics
Structures	Operation Analysis
Weights	System Analysis

Generous travel allowances to those accepted. For free brochure, write Mr. H. T. Brooks, Engineering Dept. 200

CONVAIR
IN BEAUTIFUL
SAN DIEGO
3302 PACIFIC HIWAY
SAN DIEGO 12, CALIFORNIA



R-2800's
31's-51's-75's

$3200.00 Each

These engines are 00:00 time since C.A.A. approved overhaul and have had ACES C.A.A. approved outside in lubrication system blower to thrust plates incorporated. They have also been block tested in our modern test cells and have been prepared for long term storage.

C.A.A. APPROVED OVERHAULS

- R-1830-92 ..... $3000.00 ea
- R-985-AN-3 ..... $1950.00

ALL WORK AND ENGINE SALES CARRY OUR 100 hr. WARRANTY

AIR CARRIER ENGINE SERVICE Inc.

C.A.A. Approved Repair Station No. 3604 — Intl. Airport Branch, P. O. Box 236, Miami 48, Florida

Cable "ACENGSER"

ACES — AIR CARRIER ENGINE SERVICE, INC.

PRATT & WHITNEY ENGINES

THREE R2000-7

No Time Since Commercial Overhaul

R1830-65's

No Time Since Overhaul $1650.00

P. D. SMITH

AIRCRAFT ENGINE PARTS

10901 SHERMAN WAY

SUN VALLEY CALIFORNIA

BEECHCRAFTS

For immediate delivery, four excellent Twin-Beechcrafts and three *like new* Bonanzas Guaranteed to be as represented.

— BEECHCRAFT DISTRIBUTORS —

ATLANTIC AVIATION CORPORATION

P. O. Box 116, Hasbrouck Heights, N. J.

Tel: HAsbrouck Heights 8-1740

INSTRUMENTS

Authorized Factory Sales and Service

for

* **Eclipse–Pioneer**
* **Kollsman**
* **U. S. Gauge**

C.A.A. Approved Repair Station #3564

Contractors to U. S. Air Force

Our stock of instruments is one of the largest in the East.

IMMEDIATE DELIVERY

CALL • WIRE • WRITE

INSTRUMENT ASSOCIATES

Telephone: Great Neck 4-1147
331 Great Neck Road, Great Neck, N. Y.
Telegraph: WUX Great Neck, N. Y.

HANGARS FOR SALE

IMMEDIATE DELIVERY—WE INSTALL

40', 148', 198' widths, any length

ANDERSON STRUCTURAL STEEL CO.
1700 Sawtelle Blvd., Los Angeles 25, Calif.
ARIZONA 32681 — BRADSHAW 21242

WINGS FIELD AMBLER, PA — **WINGS, INC.** — PHILA. INTL AIRPORT

AIRCRAFT SALES & SERVICE SINCE 1929

Consult Us with Confidence before BUYING or SELLING any type aircraft

You Pay Nothing for Our EXPERIENCE and INTEGRITY

AMBLER 1800

HYDRO WYPE SCRAPER RINGS

AN-6231-A

Write for complete catalog

Gadgets, inc. — Department W, 3629 N. Dixie Dr., Dayton 4, Ohio

---

Executive Lodestar

Immediate delivery. 1830-94's, special props., deluxe interior and radio. Tanks resealed. Performance guaranteed 240 mph cruise, or your money back. All latest modifications, corporate owned.

Executive D-18-S Beechcraft

150 hrs. since 1000 hr. overhaul airframe and hydromatic prop. 300 hrs. TSO-14B engine, deluxe radio, radio panel and interior, super sound-proofing. Aeroquip. Deicer and anti-icer. 80 gal. nose tank. Immediate delivery.

AMERICAN AIRCRAFT CORP.

Dept. A.W. Teterboro Air Terminal
Teterboro, N. J. — HAsb'k Hts 8-0279, 1482

FOR SALE
HILLER HELICOPTERS

Two Model 360—Mfd. 1950. Excellent condition. Spray & dust equipment.

FS-6658, Aviation Week
330 W. 42 St., New York 36, N. Y.

BONANZA'S FOR SALE

Bonanza 35—Total time 471 hours AF. Engine E 185-8, 184 hours, E-80 starter. New paint, two-tone green, white trim, new interior, full instruments, flares, Omni. Immaculate. $8995.

Bonanza 35—Engine 374 hrs. factory remanufactured. New paint, red and black, white cap. New interior, air conditioner, VHF, New prop and tires. Immaculate. $7995.

CENTRAL AMERICAN AIRWAYS
Bowman Field — Louisville, Kentucky

LOCKHEED LODESTAR

Late Serial #2614, N-633

This was one of the latest Lodestars manufactured by Lockheed and is without question one of the very best you could find. Conversion just completed in our shops. Beautiful executive interior, deluxe lavatory, closet, divan, 6 chairs, desk, hot cups, ice box, indirect lighting, etc. Beautiful gray exterior with white top and green trim. Brand new Wright 1820-87 engines. 24 Volt.

PAGE AIRWAYS, INC.
Rochester Airport — Rochester, New York
Genesee 7301

P & W R 2000 Engine Parts

7-11-9-13

Cylinders • 50724 Valves
Piston Pins • Crank Cases
Crank Shafts • Prop. Shafts

New and Serviceable

TRANSPORT AIRCRAFT—ENGINES

AIRLINE EQUIPMENT CORP.

Newark Airport, Newark, N.J.
MARKET 2-0963-4

ATTENTION C-46 OPERATORS
FOR SALE

C46D Aircraft with new engines. Delivered in Florida $60M, 30 to 60 days after order. Tail Modification $17M. Licensed for 48M Gross, Cargo interior $90M. Passenger interior to your specifications.

Direct your C-46 needs to Aircraft Design Development Engineer:

E. L. MARSH
Box 263, Pompano Beach, Florida, USA

FOR SALE

DC-4's—DC-3's

Lodestars—B-25J

Contact us for details
No charge for listing your aircraft

WESTAIR (Dept. AW)
WESTCHESTER COUNTY AIRPORT
White Plains, N. Y. — WHite Plains 6-9720

BUY FROM ONE SOURCE!

Save time—save money—buy unused aircraft parts from one of the largest most diversified warehouse stocks in the country!

Quan.	Part No.	Mfg.	Description
20	36001-0	Eclipse	Compass
11	14601-1F-B1	Eclipse	Gyro Indicator
10	15401-1	Eclipse	Amplifier (PB10)w/ED3 MOUNT
66	10078-1AG	Eclipse	Gyro Indicator
62	CQ-9	Eclipse	Clutch Switch (PB10)
11	12086-1C	Eclipse	Amplifier
19	15100-1B-A1	Eclipse	Pitch Trim Gauge
8	20000-43A-13A1	Eclipse	Magnesyn Indicator
67	23000-2A	Eclipse	Magnesyn Indicator
15	22101-11-A4	Eclipse	Pressure Trans.
6	2226-11C-3A	Eclipse	Dual Tach.
9	20100-42B-14A2	Eclipse	Torque Ind.
9	20000-8A-14	Eclipse	Magnesyn Pos. Ind.
23	20100-11C-4-A1	Eclipse	Wing Flap Indicator
11	DW-33	Eclipse	Transformer
23	CQ-2	Eclipse	Switch Box
75	1195-4-A	Eclipse	Vibrator
80	DW-28	Eclipse	Transformer
11	2227-11-D3A	Eclipse	Tashometer
75	1416-19E	Eclipse	Starter
100	716-3A	Eclipse	Generator (NEA-3A)
384	564-2A	Eclipse	Oil Separator
71	828TY13Z2	Weston	Oil Temp. Indicator
26	827TY14Z2	Weston	Cyl. Head Temp. Indicator
40	119862	Weston	Carb. Air Temp. Indicator
400	AN5780-2	Weston	Wheel & Flap Position Indicator
1000	AN5780-2	G.E.	Wheel & Flap Position Indicator
40	828TY12Z2	Weston	Dual Carb. Temp. Gauge
11	727TY70Z2	Weston	Air Temp. Ind.
85	727TY72Z2	Weston	Air Temp. Gauge
88	727TY73Z2	Weston	Air Temp. Gauge
83	727TY74Z2	Weston	Air Temp. Gauge
10	728-40Z2	Weston	Air Temp. Gauge
21	8DJ29AAY	G.E.	Cowl Flap Ind.
22	77C5	Lewis	Carb. Air Temp.
16	76B19	Lewis	Cyl. Head Temp.
23	77C3	Lewis	Oil Temp. Gauge
13	77C4	Lewis	Oil Temp. Ind.
30	47B21	Lewis	Free Air Temp.
33	47B22	Lewis	Air Temp. Gauge
28	47B23	Lewis	Air Temp. Gauge
54	47B24	Lewis	Air Temp. Gauge
22	906-6-011	Kollsman	Diff. Press. Gauge
48	254BK-6-052	Kollsman	Diff. Press. Gauge
33	DW-47	Eclipse	Transformer
46	117-47	Edison	Fire Detector
19	117-10	Edison	Control Box
345	981280	Walter Kidde	CO_2 Cylinders
43	966090	Walter Kidde	Interconnector
104	966679	Walter Kidde	Pressure Control
225	981591	Walter Kidde	Tee
151	A-4614	Walter Kidde	Switch
47	M870036B	Walter Kidde	CO_2 Cyl.
74	923748	Walter Kidde	Oxygen Cyl.
326	982585	Walter Kidde	Valve
325	AN6009-1B	Ohio Chemical	Valve
247	AN6009-2A	Ohio Chemica	Valve
47	2-1046-76	Parker	Valve (3000 PSI)
115	P4CA2A	Parker	Primer
98	SP4-2746-76	Parker	Restrictor Valve
68	SP4-2746-77	Parker	Restrictor Valve
105	SP4-2746-78	Parker	Restrictor Valve
68	6-746-10	Parker	Valve
40	SP4-2746-79	Parker	Restrictor Valve
48	SP4-2746-80	Parker	Restrictor Valve
60	SP4-2746-81	Parker	Restrictor Valve
127	PL2-2546-75	Parker	Cone Check Valve
123	PL2-2546-76	Parker	Cone Check Valve
620	PL2-2546-77	Parker	Cone Check Valve
540	PL2-2546-78	Parker	Cone Check Valve
142	SP4-2746-76	Parker	Restrictor Valve
112	PLY-843-54	Parker	Check Valve
23	PL2-1846-77	Parker	Check Valve
120	MF9-713-15A	Vickers	Hydraulic Pump
124	PF12-713-25BCE	Vickers	Hydraulic Pump
10	PF9-2713-20Z2	Vickers	Hydraulic Pump
327	PF4-713-20BCE	Vickers	Hydraulic Pump
57	MF45-3911-20Z	Vickers	Hydraulic Pump (3000 PSI)
28	AA31400	Vickers	Valve
125	D7818	Adel	Anti-icer Pump
250	AN4014	Erie Meter	Wobble (D-3) Pump
550	TFD8600	Thompson	Fuel Booster Pump
45	AN4103-2	Clifford	Brass (Valve #U4785) Oil Cooler
70	AN3213-1	Scintilla	Ignition Switch
250	A-9 (94-3926)	Nesco	Ignition Switch
66	M862A	Jos. Pollack	Master Switch
148	PG208AS1	Minn. Honeywell	Switch Air Ram.
40	PG208AS7	Minn. Honeywell	Air Ram Switch

Quan.	Part No.	Mfg.	Description
18	4582-AA-6C	Dynamic Air Eng.	Blower
24	U-702-15	Joy Mfg. Co.	Blower
20	V301B7	Aerotec	Pressure Relief Valve
419	450	Skinner	Filter
287	1033-4E1	White-Rodgers	Heater Control Switch
126	17322-2	Fenwall	Thermo-Switch
34	9804B	Vapor Car Heating Co.	Control Box
25	468311	Vapor Car Heating Co.	Compensator
202	A812	Interstate Aircraft & Eng. Co.	Solenoid
46	146102	Bendix	Valve (0-500 PSI)
240	1965-900	Airex	Relief Valve
29	HC2109	Air Associates	Hyd. Cylinder
8	HC2110	Air Associates	Hyd. Cylinder
53	AN6203-3	Bendix	Accumulator 10"-1500 P.S.I.
90	JH950-R	Jack & Heinz	Starter Motor
140	K14949E	Marquette	Windshield Wiper Kit
188	EYLC-2334	Barber-Colman	Control
230	921-B	Stewart-Warner	Heater (200000 BTU)
22	0655-D	Aro	Oxygen Regulator
65	ASDC2	CO_2 Mfg. Co.	Fire Detector
97	6041H-146A	Cutler Hammer	Relay (B-12)
237	6141-H69A	Cutler Hammer	Circuit Breaker
47	7264-404	Leach	Relay
22	M-2031	Air Associates	Actuator
11	FYLD2516	Barber Colman	Thermostat
51	AYLZ2284	Barber Colman	Micropositioner
20	78400	Ham. Stand.	Prop. Reversing Control
10	5X18	Woodward	Governor
46	A14-A-9708P	Westinghouse	Contactor
26	70G3	G.E.	Transformer
718	B2A	Square D	Relay
6	83A94	Surface Combustion Co.	Heater
115	C6363-1-5A	Spencer	Circuit Breaker
115	C6363-1-2A	Spencer	Circuit Breaker
33	18784	Adel	Restrictor Valve
1700	AM1614-80	Heinemann	Circuit Breaker
31	BOBX-2	Allied	Relay
85	12924-2	Adel	Lock Valve
805	58G926	G.E.	Ballast Core & Coil
140	58G946	G.E.	Ballast
40	7210-24	Leach	Relay
66	25432	Airesearch	Flex. Cable
518	MT48C	Bendix Radio	Insulator
20	M-101-B	Aerotec	Pressure Switch
12	MT68EG	Bendix Radio	Mount
52	715E	Fulton Syphon	Temp. Control
478	D9530	Adel	Selector Valve
668	D9530-2	Adel	Selector Valve
428	D9560-2	Adel	Selector Valve
179	D9632	Adel	Selector Valve
237	D9696	Adel	Selector Valve
744	D10044	Adel	Selector Valve
244	D10051	Adel	Selector Valve
814	74247 (TY. PH3)	Aero Supply	Valve
335	AN5830-1	Whittaker	Valve
74	AN5830-6	Whittaker	Valve
60	AN5831-1	Parker	Valve
65	1011-2	Eclipse	De-icer Valve
130	612-4A	Eclipse	Valve
2200	37D6210 (AN4078-1)	United	Solenoid Valve
1888	K1593-6D	Kohler	Valve
500	NF3-5	Mallory	Noise Filter
20	TA-12B	Bendix Radio	Transmitter
35	RA10-DB	Bendix Radio	Receiver
2585	AN3096-4	Grimes	Dome Light
775	AN3096-5	Grimes	Dome Light
1365	AN3096-6	Grimes	Dome Light
6	610-2C	Eclipse	Vacuum Pump

STAINLESS STEEL BOLTS

Quantity	Part No.	Quantity	Part No.	Quantity	Part No.
200	AN3-CH3A	762	-C12	103	-C12A
440	-C4	637	-C13	114	-C25
411	-C6	191	-C14A	210	-C30
8211	-CH6A	7742	-C20	102	-C36
173	-C7	345	AN5-C7A	246	-C41
90	-C11	2543	-C7	165	AN6-C7
457	AN4-C4	1531	-CH7	393	-C14
516	-CH6	2578	-CH7A	129	-C14A
6714	-C7	1660	-C11	450	AN7-C21A
80	-C10A	185	-C11A	194	AN8-C15

We own and offer all parts listed — plus many thousands more — stocked in our Baltimore warehouse. Write for **FREE CATALOG** Please make your request on your company letterhead.

COMMERCIAL SURPLUS SALES CO.

4101 CURTIS AVENUE, BALTIMORE 26, MARYLAND — TELEPHONE: CURTIS 3300

SHORTLINES

► **American Airlines** has told CAB it will be glad to furnish unrestricted Dallas-San Antonio service as requested in a San Antonio Chamber of Commerce application to CAB. Service currently is restricted to those flights starting or ending in Mexico.

► **British European Airways** claims a London-Cologne speed record of 70 min., 17 sec., flown by a BEA turboprop Vickers Viscount despite bad weather that caused 10 minutes delay in a GCA landing.

► **Canadian Pacific Airlines** proposes trans-Pacific immigrant coach fares of $500 from Hong Kong and $450 from Tokyo to Vancouver, Portland, Seattle, San Francisco or Los Angeles—30% under present fares of $726 and $650 respectively. . . . CPA has taken delivery of the first of four 50-passenger DC-6Bs and two DC-6A cargo planes on order.

► **Eastern Air Lines** has retired the last of its DC-3s, replaced by 60 Martin 4-0-4s. The fleet had piled up 83.5 million miles since starting operation in 1936. DC-3 No 344, with 56,782 hours flight time (6½ years actually in the air), goes to Smithsonian Institution's National Air Museum. . . . Eastern has expanded passenger facilities at New York International Airport.

► **El Al Israel Airlines** managing director Louis Pincus, referring to a decision to convert the carrier's entire operation to coach, says: "We will attempt to make tourist service a specialty, not merely an inexpensive alternative to luxury travel."

► **Flying Tiger Line** domestic freight volume in 1952 was 48% higher than a year ago to 41,584,387 ton-miles. . . . Flying Tiger has cut garment freight rates eastbound 11 to 12½% on movements of 5,000 lb. or more.

► **International Civil Aviation Organization** navigation commission has decided that airline life jackets must be supplied with a waterproof, battery-operated flashlight.

► **Port of New York Authority** has published an airfreight origination and destination survey.

► **National Airlines** has grown from the "smallest of the country's 16 domestic airlines" in 1939 to a major carrier topped only by the Big Four in annual net income earned, Selig Altschul of Aviation Advisory Service reports in a study and appraisal of NAL.

► **Northwest Airlines** trans-Pacific mail rate (AVIATION WEEK Jan. 26, p. 77) is expected to become effective within a few days, as soon as CAB Opinion-Writing Division dispenses with exceptions filed by nonsked Air Transport Associates, Inc. . . . This will clear the way for financing of some new equipment by Northwest. . . . Reports 1952 passenger-miles of 720,046,264, 20% higher than a year ago. Freight ton-miles gained 2% to 11,416,019; express decreased 1% to 2,005,482; and mail increased 10% to 5,017,993. Passenger load factor was 64% in both 1952 and 1951. . . . December passenger-miles of 56,252,693 were 26% more than a year ago.

► **Pan American World Airways** sales and traffic vice president, Willis Lipscomb, told a PAA sales conference in Rome: "There is no such thing as an economic jet. But once the human being experiences jet travel, we have to satisfy his desire for that kind of transportation." Lipscomb predicted jets for luxury and piston power for coach. The meeting was to boost PAA Italian travel to meet rising domination by TWA. . . . PAA reports its 3,900-mi. nonstop Tokyo-Honolulu Stratocruiser schedule this winter is "the longest nonstop scheduled flight in the world." West-east "jet stream" winds of 70-80 mph. at 23,000 ft. make it possible, cutting time from 18 hr. to 11. Second longest nonstop is the 3,623-mi. New York-Paris run.

► **Scandinavian Airlines System** carried some 600,000 passengers last year compared with 506,000 in 1951 and 434,000 in 1950. Paid ton-kilometers increased to 85 million last year, against 73 and 62 million recorded the previous year.

► **United Air Lines** has juggled its DC-6 coach inauguration again, rescheduling the California-Hawaii run for Mar. 22 and the trans-continental flight for Apr. 26. . . . UAL has joined Radio Corporation of America in an airborne weather-detection radar development (AVIATION WEEK Dec. 22, p. 11). The equipment will be developed for United by RCA engineering products department, Camden, N. J., which expects to deliver an experimental model early this summer in time for the thunderstorm season. . . . United also has introduced a new punchcard ticketing system for New York-Chicago flights as a forerunner to introducing it on the entire 13,250-mi. route system. . . . UAL reports machines and machine parts led all other types of airfreight by weight flown on United transports in 1952.

WHO'S WHERE

(Continued from page 11)

of guided missile components and computer equipment.

Gaither Littrell has been appointed public relations director of Rosan, Inc., Newport Beach, Calif., producers of aircraft parts.

Harvey M. Thompson has been named chief pilot of Allegheny Airlines.

William F. Ballhaus has been appointed assistant chief engineer of Northrop Aircraft, Inc., Hawthorne, Calif. Also named to Northrop posts are **Clare Harris**, assistant chief engineer in charge of projects and components; **Frank B. Bolte**, chief of engineering research; **Stanley J. Worth**, chief engineering administrator; **W. R. Clay**, chief project engineer, and **R. A. Hall**, chief of electro-mechanical laboratories.

O. W. Babcock has been appointed staff superintendent of United Air Lines' personnel development. He is succeeded in his former post of district personnel manager at Los Angeles by **William Looney**.

H. A. Pfaff recently was named manager of Emery Air Freight Corp.'s central region. Other changes announced by the cargo carrier: **G. J. Pimlott**, district manager, Cincinnati; **John C. Emery Jr.**, manager eastern region; **K. C. Impellitier**, district manager, Buffalo; **P. E. George**, district manager, New York; **J. R. Whittemore**, district manager, Baltimore; **P. J. Byrne**, midwest regional manager; **A. M. MacIver-Campbell**, west coast regional manager.

J. F. Robertson has been elected to the board of directors of Hawker Siddeley Group., Ltd., London.

Henry F. McKenney has been appointed chief engineer of Ford Instrument Co., division of Sperry Corp., L. I. City, N. Y.

Honors and Elections

Clay P. Bedford, president and a director of Chase Aircraft Co., Inc., has been elected a trustee of Rensselaer Polytechnic Institute, Troy, N. Y.

Reginald James Seymour Pigott has been elected president of the Engineers Joint Council, succeeding **T. G. LeClair**. A consultant to Gulf Research and Development Co., Pigott was former president of the American Society of Mechanical Engineers.

Joseph D. Ryle, public relations director of American Airlines, has been named chairman of the public relations advisory committee of the Air Transport Assn.

Vincent J. Schaefer, of General Electric's research laboratory and scientific director of Munitalp Foundation, Inc., received the Robert M. Losey Award last week for outstanding work in aeronautical meteorology.

Frank N. Piasecki, board chairman of Piasecki Helicopter Corp., Morton, Pa., has been named one of the 10 outstanding young men of 1952 by the U. S. Junior Chamber of Commerce for his "leadership in . . . development of the helicopter industry."

Irving Kendall Clark, General Electric field service supervisor for aircraft gas turbine apparatus, recently received GE's Charles A. Coffin award for "work of outstanding merit during 1952."

ADVERTISERS IN THIS ISSUE

AVIATION WEEK—FEBRUARY 9, 1953

ADEL DIV., GENERAL METALS CORP. 60
Agency—The McCarty Company
AEROTEC CORPORATION, THE 59
Agency—Hening & Co., Inc.
AIRBORNE ACCESSORIES CORP. 9
Agency—Gray & Rogers Adv.
AIRCRAFT EQUIPMENT TESTING CO. 66
Agency—Mahool Advertising, Inc.
AIRCRAFT TRADE SHOW 5
Agency—Alexander Smith Advertising
ALLISON DIV., G.M.C. ..... Fourth Cover
Agency—Kudner Agency, Inc.
AMERICAN AIRLINES, INC. 5
Agency—Ruthrauff & Ryan, Inc.
AMERICAN CHAIN & CABLE, PAGE STEEL & WIRE DIV. 54
Agency—Reincke, Meyer & Finn, Inc.
AMERICAN NON-GRAN BRONZE CO. 80
Agency—Norman P. Hewitt Adv.
AMERICAN PHENOLIC CORP. 36
Agency—Burton Browne Adv.
B. H. AIRCRAFT CO., INC. 88
Agency—Harold Marshall Adv. Co.
BARBER COLMAN CO. 33
Agency—Cummings, Brand & McPherson
BEECH AIRCRAFT CORP. 6
Agency—Erwin, Wasey & Co., Inc.
BOURNS LABORATORIES 44
Agency—The McCarty Co.
BRISTOL ENGINEERING CORP. 65
CHANCE VOUGHT AIRCRAFT DIV. UNITED AIRCRAFT CORP. 42, 43
Agency—Lennen & Newell, Inc.
CITIES SERVICE OIL CO. 30
Agency—Ellington & Co., Inc.
CLIFFORD MFG. CO. 71
Agency—James Thomas Chirurg Co.
CONTINENTAL MOTORS CORP. 32
Agency—Cummings & Hopkins Adv.
CURTISS WRIGHT CORP. 52
Agency—Burke Dowling Adams, Inc.
DARNELL CORP. LTD. 66
Agency—Henry L. Rhea Adv.
DOUGLAS AIRCRAFT CO. 30
Agency—J. Walter Thompson Co.
EBERHARD FABER PENCIL CO. 35
Agency—Hicks & Greist, Inc.
ECLIPSE-PIONEER DIV. BENDIX AVIATION CORP. 57
Agency—MacManus John & Adams, Inc.
ELECTRICAL ENG. & MFG. CO. 15
Agency—West-Marquis, Inc.
ESSO STANDARD OIL CO. 56
Agency—McCann-Erickson, Inc.
FLITE-TRONICS, INC. 66
Agency—Jaycraft Co.
GOODRICH CO., B. F. 3
Agency—Batten, Barton Durstine & Osborn, Inc.
HANSEN MFG. CO. 65
Agency—Richard T. Brandt, Inc.
HARPER COMPANY H. M. 37
Agency—The Buchen Company
HARTWELL AVIATION SUPPLY CO. 53
Agency—The McCarty Co.
HARVEY MACHINE CO. ..... Third Cover
Agency—Hixson & Jorgensen Adv., Inc.
HI SHEAR RIVET TOOL CO. 77
HYDRO AIRE, INC. ..... Second Cover
Agency—John H. Riordan Co.
HYDRAULIC PRESS MFG. CO., THE 40
Agency—The Jay H. Walsh Co.
KAISER METAL PRODUCTS, INC. 77
Agency—B. K. Davis & Bro.
KLINCHER LOCKNUT CORP. 67
Agency—Chamberlin-Junk
LEACH RELAY CO. 41
Agency—The McCarty Company
LEAR, INC. (LEARCAL DIV.) 20
Agency—Buchanan & Co.
MARYLAND ELECTRONIC MFG. CO. 48
Agency—Geare-Marston, Inc.
MAXIM SILENCER CO., THE 45
Agency—Edward W. Robotham & Co.
MICRO SWITCH 46, 47
Agency—Reincke Meyer & Finn, Inc.
MINNEAPOLIS-HONEYWELL REG. CO. ..... Front Cover
Agency—Foote, Cone & Belding
NORTH AMERICAN AVIATION CO. 62, 63
Agency—Batten, Barton, Durstine & Osborn, Inc.
NORTHROP AIRCRAFT, INC. 78, 79
Agency—West-Marquis, Inc.
NUTT-SHEL COMPANY 31
Agency—Welsh-Holander Adv.
OHIO SEAMLESS TUBE CO. 74
Agency—Howard Swink Adv. Agency, Inc.
PIASECKI HELICOPTER 80
Agency—B. K. Davis & Bro.
PITTSBURGH PLATE GLASS CO. 55
Agency—Batten, Barton, Durstine & Osborn, Inc.
ROBERTSHAW FULTON CONTROLS CO. 73
Agency—The Griswold-Eshleman Co.
ROYLYN, INCORPORATED 27
Agency—Abbott Kimball Co. of Calif.
RYERSON & SON, INC. 38
Agency—Aubrey, Finlay, Morley & Hodgson, Inc.
SCINTILLA MAGNETO DIV. BENDIX AVIATION CORP. 22
Agency—MacManus, John & Adams, Inc.
SCOTT AVIATION CORP. 80
Agency—Melvin F. Hall Adv. Agency
SEARCHLIGHT SECTION ... 81, 82, 83, 84, 85, 86, 87
SERVOMECHANISMS, INC. 60
Agency—Sanger-Funnell, Inc.
SIER-BATH GEAR & PUMP CO. 26
Agency—Thoma & Gill
SOUTH CAROLINA AERONAUTICS COMMISSION 66
Agency—Henderson Adv. Agency
STANDARD PRESSED STEEL CO. 34
Agency—Gray & Rogers Adv.
THERMO ELECTRIC CO. 70
Agency—Fred Lange Associates, Inc.
TOMKINS JOHNSON CO. 72
Agency—Beeson-Reichert, Inc.
TUBE METHODS, INC. 58
Agency—John Miller Adv. Agency
TUBING SEAL CAP, INC. 10
Agency—L. J. C. Spruance, Adv.
WESTERN AIR LINES, INC. 49
Agency—Buchanan & Co., Inc.
WESTINGHOUSE ELECTRIC CORP. 28, 29
Agency—Fuller & Smith & Ross, Inc.
WHEELER INSULATED WIRE CO., THE 4
Agency—Edward W. Robotham & Co.
ZEP AERO & BREATHING EQUIP. CO. 71
Agency—The Shaw Company

SEARCHLIGHT SECTION

(Classified Advertising)

H. E. Hilty, Mgr.

EMPLOYMENT
Positions Vacant 81, 82, 83, 84, 85
Selling Opportunities Offered 81
Positions Wanted 81
Selling Opportunities Wanted 81
Employment Agencies 81
SPECIAL SERVICES 81
EDUCATIONAL
Books 81
BUSINESS OPPORTUNITIES
Offered 81
PLANES-EQUIPMENT
(Used or Surplus New)
For Lease 81
For Sale 81, 86, 87
WANTED
Equipment 86

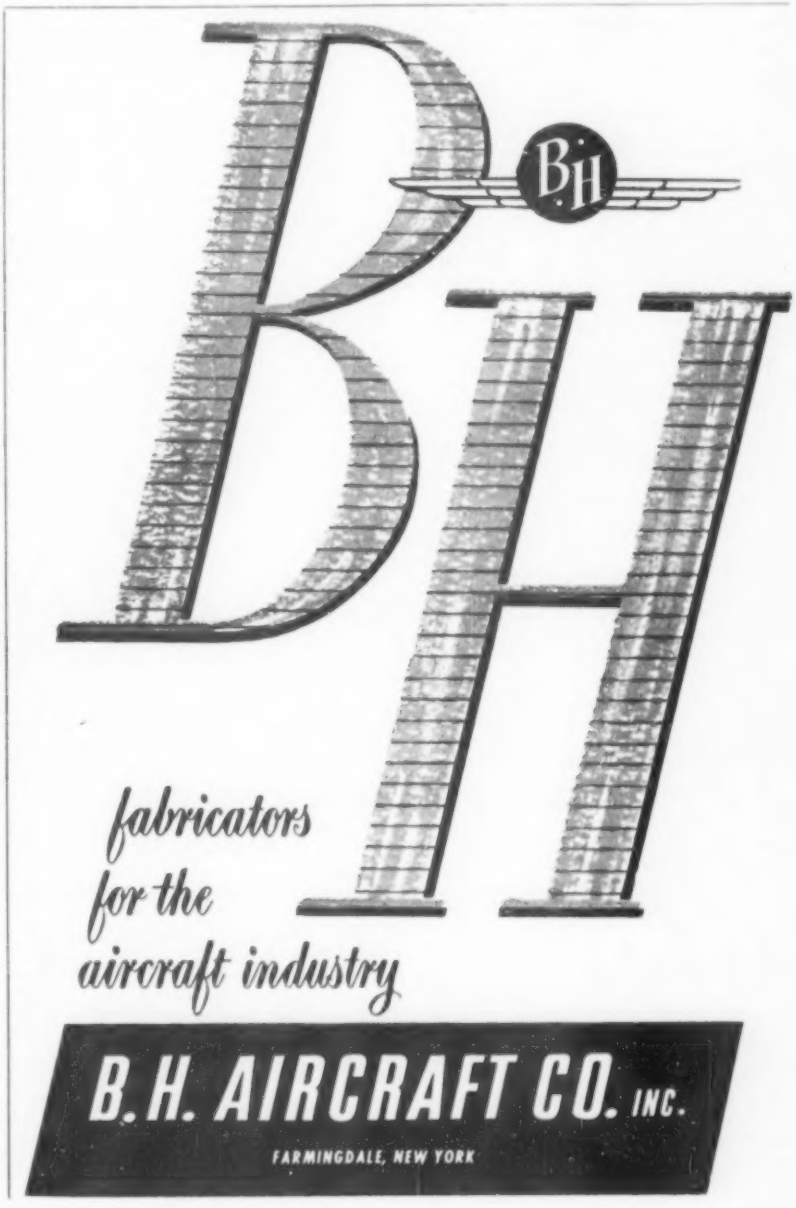

LETTERS

Pictorial Computers

In Capt. R. C. Robson's "Treatise on Pictorial Computer" in AVIATION WEEK for Nov. 24, in our opinion, several assertions need clarification.

In speaking of accuracy, Capt. Robson quotes a maximum possible OBD system error of nine degrees. We understand that the CAA will not commission any VOR station with an error in excess of three degrees. (One degree of this error is permitted to be in the airborne equipment and two degrees are permitted to exist in the ground station.)

Some VORs may presently be in operation with greater error than this, but all commissioned stations have been or can be adjusted to within three degrees maximum system error. We further understand that DME error does not exceed 0.5 mi. in any of the currently available equipments.

All pictorial computers designed by any manufacturer meet a uniform specification of one-half degree maximum azimuth error and 0.4 mi. maximum distance error.

The combined OBD system accuracy as presented on a pictorial computer can presently be expected, under the worst conditions, to lie within 3.5 deg. of azimuth and 0.9 mi. in distance: not a maximum nine-degree error in azimuth, as Capt. Robson suggests.

The confidence of CAA traffic control experts in these accuracies is such that their future planning of holding patterns and other terminal area separations is based on them. When the VOR is less than 20 mi. from a given airport, as is planned in most cases, the maximum error will be about one mile. This will be a considerable improvement over present terminal area navigation and will be entirely adequate for terminal area traffic patterns under present and foreseeable traffic densities. Thus the usefulness of the OBD and its pictorial computer is not limited to en route navigation alone.

With respect to reliability, the elements of the OBD system are at least as reliable as a radar system would be. Neither system is fail-safe. Although the VOR is not self-checking at present, it is understood that the possibility of transmitting a "check-bearing" to the pilot prior to the clearance of his flight plan is being seriously considered. There is inherent reliability in the contemplated final pictorial computer designs.

Picture size: It is expected that space can be found on the instrument panels of many current aircraft types for a seven-inch situation display.

The purpose of the OBD system is to provide improved navigational reference data for safety while flying over charted airways. The purpose of the pictorial computer is to use this data to compute the aircraft position and then to display position on a conventional airways chart. Radar will not do this.

It is agreed that the detection of other aircraft and of bad weather pockets is important and that equipment to do this should be developed. We understand that such equipment is neither simple nor cheap and is not likely soon to reach the market. When it is available, the display unit of such equipment could appropriately be incorporated in the display screen of the pictorial computer, which in the meantime will offer the most easily interpreted situation display yet developed for both en route and terminal area flight.

S. J. DAVY
Computer Engineering Dept.
Arma Corporation
Garden City, New York

Fighters and Altitude

J. Murray of Grand Prairie, Texas (Jan. 5, Letters), raises a point concerning low-altitude operation of high-altitude fighters which is a moot question among aircraft designers. Are we saddling our interceptors with too much beef in order to insure their safe operation at low level? We don't think so at North American and, briefly, here's why:

Although the F-86D or any high-altitude interceptor is designed primarily to fight above 40,000 ft., obviously it must be capable of operating also at lower altitudes. The resulting aircraft, of necessity, is a compromise.

We appreciate only too well the effects of high wing loading on high-altitude airplanes. Since jet engines develop maximum thrust at sea level these airplanes are capable of obtaining maximum speeds at low level. Limiting their speed at these altitudes because of structural weakness is placing a severe restriction on their operation.

Climbing quickly from takeoff to altitude is an extremely important function of any interceptor. And once the fight has begun, would you ask our pilots to break off a dive on any enemy airplane at 10,000 ft. because they'll shed their wings if they don't?

As a matter of public record, this is a maneuver which has been employed by Air Force F-86 pilots in Korea to bag a MiG. Our pilots have received kill credits by outdiving the Russian-built fighters which apparently cannot withstand a high G dive pull-out. The kill ratio in Korea stands at 8 to 1 in favor of the Sabre, which makes us believe our fighters aren't too heavily compromised.

The record-breaking run of the F-86D, incidentally, was made only after structural tests demanded by the Air Force proved it could take the tremendous "G" pressures at low altitude.

Selection of the below-sea-level Salton Sea speed site was made primarily to take advantage of the area's high ambient temperatures. It is generally known that modern jet fighters in the transonic speed range have a maximum given Mach number in level flight. Mach number varies with temperature. Therefore, at the limiting level flight Mach number, higher true speeds may be obtained under higher temperature conditions.

MILT KUSKA, F-86D FLIGHT TEST PROJECT ENGINEER
North American Aviation, Inc.
International Airport
Los Angeles 45, California

Cornell's Stalls

Your article Dec. 22 concerning the Cornell Aeronautical Laboratory's stall projects seems to have confused our actual accomplishments in this field with the possibilities, however remote, that may result from our work.

We have successfully studied and performed full-scale experiments upon the longitudinal motion of a stalled airplane, and are now continuing with lateral motion.

As part of this work, we have developed an automatic control which is highly successful in stabilizing the fully stalled airplane. We have not, however, "ridden the stall all the way to the ground," nor have we any intention of doing so with the present test airplane, since its minimum rate of descent in a stall with full power is some 1500 ft./min.

If a landing were made with a fully stalled airplane, the forward speed would be greater, not less, than in conventional landings, because the lift coefficient drops off above the stall. The landing roll probably would be less, as stated, due to the very high drag of the stalled wing.

John Seal is our chief pilot, as stated, but Gifford Bull, project engineer and pilot on the stall work, has done practically all the flying on this particular project. We are anxious that this point be clarified and it would be appreciated if the content of this letter could be published in an early issue of AVIATION WEEK.

W. F. MILLIKEN, JR., MANAGER
Flight Research Department
Cornell Aeronautical Laboratory, Inc.
4455 Genesee Street
Buffalo 21, N. Y.

(The parts of the story referred to were read by telephone to an authorized Cornell spokesman before publication, and these sections were not challenged then.—ED.)

Helping Inventors

Laurels to Mr. Grover Loening (Jan. 19, AVIATION WEEK) for getting at the heart of why, as many have observed, this country's ratio of aeronautical improvements to dollars spent is low and for describing what happens "if there was an inventor looking for help on a new idea . . ." and congratulations to AVIATION WEEK for publishing this provocative address.

But has it not occurred to AVIATION WEEK after collecting $6 each from 40,000 subscribers as an indirect result of all of our aeronautical inventiveness and after feeling benevolent enough to donate engineering educations, safety awards, and other stereotyped prizes, it is being slightly Pentagonish in not directing one cent of these donations to stimulate any unfinanced inventor or to help reduce that "discouragement (which) is evident by the very few new accepted designs . . . since the war"?

WILLIAM H. RASER, JR.
11 Terrace Circle
Great Neck, New York

aluminum extrusions

...strengthen America's defense

Bringing an aluminum extrusion to the close configuration tolerances specified by the customer is a carefully controlled operation following heat treatment at Harvey's giant Torrance plant.



America is building new weapons to guard her expanding defense perimeter. The basic qualities of aluminum extrusions which have contributed so much to the combat effectiveness of our aircraft—lightness and strength—will add to the range and firepower of our new long range weapons. Ground to ground—ground to air—air to air—aluminum extrusions are strengthening the defense of America's freedoms. As in the past, Harvey's consulting staff is available to serve you. Remember, a Harvey Engineer is as close as your telephone.

MAKING THE MOST OF ALUMINUM . . . FOR INDUSTRY

HARVEY Aluminum

DIVISION OF HARVEY MACHINE CO., INC.
TORRANCE, CALIFORNIA
BRANCH OFFICES IN PRINCIPAL CITIES

An independent facility producing special extrusions, pressure forgings, bar stock, forging stock, tubing, and related mill products.

We air-vibrate blades to get longer life in jet engines

You recall the old trick in which a singer shatters a glass by holding a high note at the critical vibration frequency of the glass.

Here at Allison we use a similar idea to determine the fatigue life of jet engine compressor and turbine blades. By electro-magnetic, air jet (as pictured) or siren excitation, we stress-cycle the blade at increasing vibration amplitudes until its endurance limit is reached. This enables us to predict "critical" engine speeds—and with this data we modify blade design for higher performance and longer service life.

Then we go a step further: The information obtained in these laboratory tests is checked by installing strain gages on blades in running engines. This stress-measuring equipment had to be specially designed by Allison engineers to meet the high temperatures, since gages of this type were not commercially available. Many Allison engine improvements have been based upon the results of these tests.

All of this is one example of the engineering thoroughness that goes into every Allison jet engine — a thoroughness that pays off in the greater dependability that has won the confidence of American jet pilots everywhere.

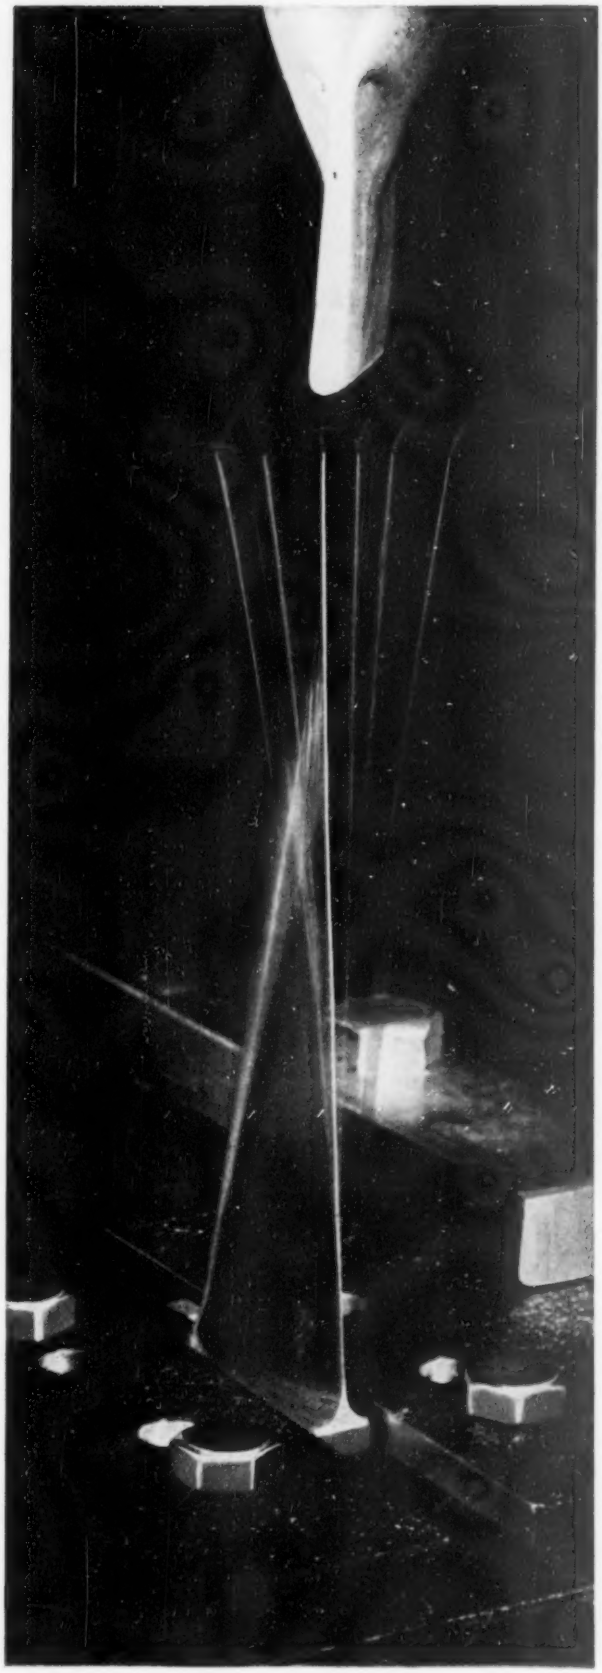

Allison

GM GENERAL MOTORS

DIVISION OF GENERAL MOTORS
INDIANAPOLIS, INDIANA

World's most experienced designer and builder of aircraft turbine engines —J35 and J71 Axial, J33 Centrifugal Turbo-Jet Engines, T38 and T40 Turbo-Prop Engines